


Drop

Display for wall integration



Brushed stainless steel



Aluminium



Glass



FEATURES

- In- wall installation
- Brushed stainless steel/ Aluminium/ Glass front frame (depending on the model)
- Easy to install
- Security anti-theft locking system
- Maintenance free
- HDCP compliant
- Energy saving design

GENERAL

Drop monitors have been designed for an easy in-wall installation. They are supplied with a separate box for fix mounting, while the screen itself provides a “clip-on front” system.

They are available with glass, brushed stainless steel and aluminium frames and provide options such as embedded PC, built-in camera and also with touch screen. All models are provided with a galvanised mounting box and are available in a variety of sizes, from 10” to 22”.

TECHNICAL SPECIFICATIONS

Display

Size	12.1" TFT Active Matrix
Resolution	800 (h) x 600 (v)
Brightness	450 cd/m2
Contrast ratio	600:1
Pixel	0.3075 (h) x 0.3075 (v) mm
Viewing angle	55° / 65° (u/d) / 70° / 70° (l/r)
Viewing area	246.0 (h) x 184.5 (v) mm
LED backlight lifespan	50.000 hrs
Response time	Tr 10 ms, Tf 20 ms
Temperature <i>(operating/storage)</i>	Operating 0°C – +40°C Storage -20°C – +60°C

Materials

Cabinet	Available with front in aluminium (A), stainless steel (I), or glass (G). With mounting box
---------	---

Connectivity

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
--------------	--

Electrical

Lowv voltage <i>(external power supply)</i>	100-240Vac, 50/60Hz, 12Vdc
Power consumption	40W

Mechanical

Dimensions	325.5 x 264.5 x 68.5 mm [12.81"x10.41"x2.70"]
Weight	3.5 Kg / 7.7 lbs (Stainless Steel & Aluminium)
	4 Kg / 8.8 lbs (Glass)
Shipping Dimensions:	
Weight	4.5 Kg / 9.9 lbs (Stainless Steel & Aluminium)
	5 Kg / 11 lbs (Glass)
Shipping Box	480 x 380 x 160 mm

OPTIONS

- Touch screen
- Integrated industrial PC
- RS-232 remote control
- HD-BaseT for Video and Power over a single Cat5 cable


CERTIFICATIONS

- CE

WARRANTY

- 2 years general warranty

CONNECTIVITY PANEL

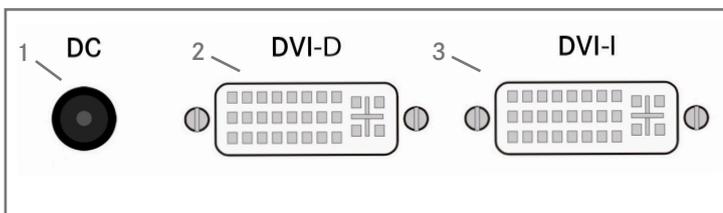

CONNECTIVITY

- 1- Power input
- 2- DVI 2 video input
- 3- DVI 1 / DVI A video input

ARCHITECT'S SPECIFICATIONS

Professional 12.1" widescreen in-wall monitor. Frame available in aluminium, stainless steel or glass. DVI-I and DVI-D connectors. HDCP compliant inputs. Back box with hook system for easy installation. External power supply.





ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

GENERAL DIMENSIONS

AH12DI/ AH12DA/ AH12DG

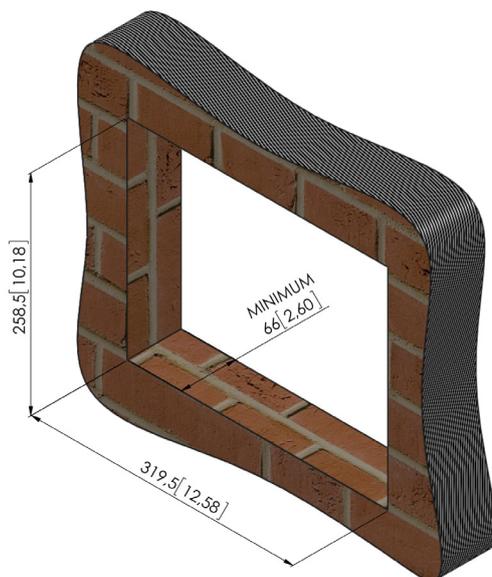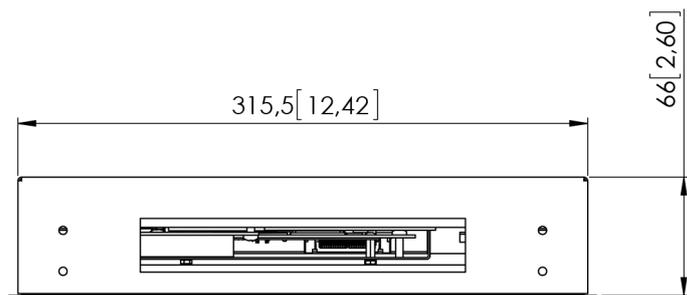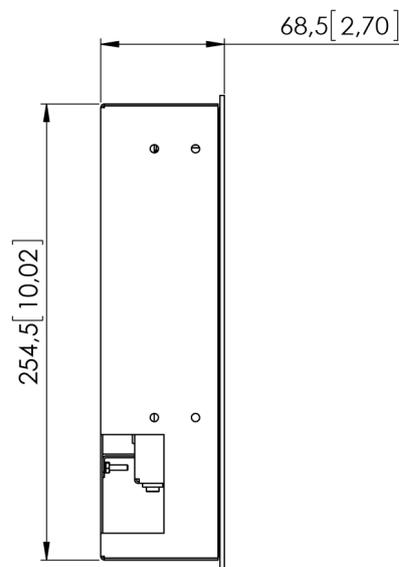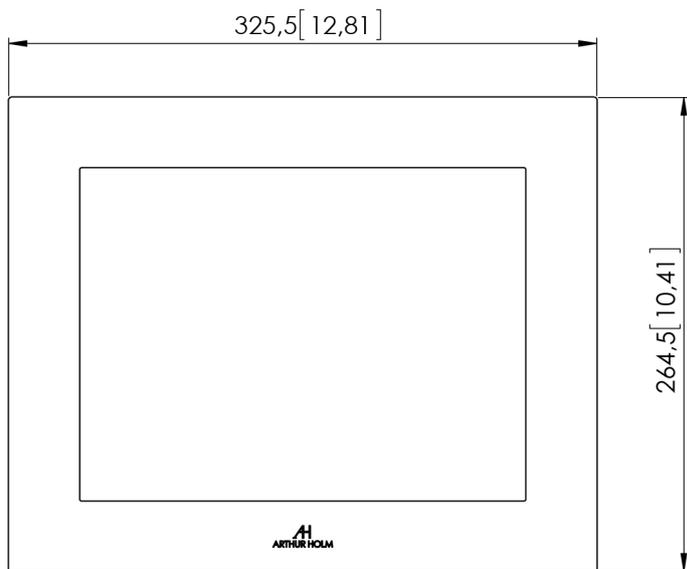

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.