

## Rise

Wall mount display



Brushed stainless steel



Aluminium



Glass

### FEATURES

- On- wall installation
- Brushed stainless steel/ Aluminium/ Glass front frame (depending on the model)
- Integrated wall mount
- Security anti-theft locking system
- Maintenance free
- HDCP compliant
- Easy to install
- Energy saving design

### GENERAL

Rise displays have been designed to be wall mounted.

Rise displays are available in several sizes, from 10" to 22" and finished in glass with black marking, brushed stainless steel or in aluminium. This compact monitor range comprises full stand-alone monitors with external power supply and integrated wall mounts with security locking to prevent theft. Rise monitors fit onto standard wall brackets.

## TECHNICAL SPECIFICATIONS

### Display

|   |  |
|---|--|
| Size                                      | 15" TFT Active Matrix                          |
| Resolution                                | 1024 (h) x 768 (v)                             |
| Brightness                                | 400 cd/m2                                      |
| Contrast ratio                            | 700:1  |
| Pixel                                     | 0.297 (h) x 0.297 (v) mm                       |
| Viewing angle                             | 70° / 70° (u/d) / 80° / 80° (l/r)              |
| Viewing area                              | 304.1 (h) x 228.1 (v) mm                       |
| LED backlight lifespan                    | 50.000 hrs                                     |
| Response time                             | Tr 5 ms, Tf 11 ms                              |
| Temperature<br><i>(operating/storage)</i> | Operating 0°C – +40°C<br>Storage -20°C – +60°C |

### Materials

|         |  |
|---------|--|
| Cabinet | Available with front in aluminium (A), stainless steel (I), or glass (G) |
|---------|--|

### Connectivity

|              |  |
|--------------|--|
| Input signal | DVI-I (1 input) – HDCP Compliant<br>DVI-D (1 input) – HDCP Compliant |
|--------------|--|

### Electrical

|  |                            |
|--|----------------------------|
| Lowv voltage<br><i>(external power supply)</i> | 100-240Vac, 47/63Hz, 12Vdc |
| Power consumption                              | 50W                        |

### Mechanical

|                      |  |
|----------------------|--|
| Dimensions           | 385 x 309 x 71 mm<br>[15.16"x12.17"x2.80"]   |
| Weight               | 4 Kg / 8.8 lbs (Stainless Steel & Aluminium) |
|                      | 4.5 Kg / 9.9 lbs (Glass)                     |
| Shipping Dimensions: |  |
| Weight               | 5 Kg / 11 lbs (Stainless Steel & Aluminium)  |
|                      | 5.5 Kg / 12.1 lbs (Glass)                    |
| Shipping Box         | 430 x 370 x 170 mm                           |

## OPTIONS

- Touch screen
- Integrated industrial PC
- RS-232 remote control
- HD-BaseT for Video and Power over a single Cat5 cable


## CERTIFICATIONS

- CE

## WARRANTY

- 2 years general warranty

## CONNECTIVITY PANEL

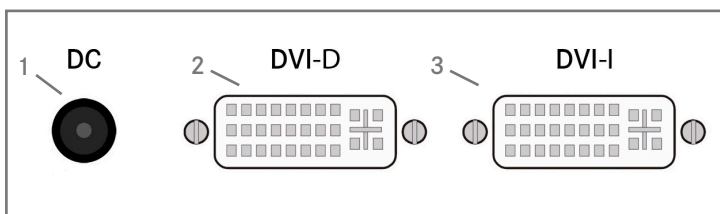

### CONNECTIVITY

- 1- Power input
- 2- DVI 2 video input
- 3- DVI 1 / DVI A video input

## ARCHITECT'S SPECIFICATIONS

Professional 15" widescreen on-wall monitor. Frame available in aluminium, stainless steel or glass. DVI-I and DVI-D connectors. HDCP compliant inputs. Easy mounting, no need special bracket to install. External power supply.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

