


Drop

Display for wall integration



Brushed stainless steel



Aluminium



Glass



FEATURES

- In- wall installation
- Brushed stainless steel/ Aluminium/ Glass front frame (depending on the model)
- Easy to install
- Security anti-theft locking system
- Maintenance free
- HDCP compliant
- Energy saving design

GENERAL

Drop monitors have been designed for an easy in-wall installation. They are supplied with a separate box for fix mounting, while the screen itself provides a “clip-on front” system.

They are available with glass, brushed stainless steel and aluminium frames and provide options such as embedded PC, built-in camera and also with touch screen. All models are provided with a galvanised mounting box and are available in a variety of sizes, from 10” to 22”.

TECHNICAL SPECIFICATIONS

Display

| | |
|------------------------------------|--|
| Size | 19" TFT Active Matrix |
| Resolution | 1280 (h) x 1024 (v) |
| Brightness | 250 cd/m2 |
| Contrast ratio | 800:1 |
| Pixel | 0.294 (h) x 0.294 (v) mm |
| Viewing angle | 75°/85° (u/d) / 85°/85° (l/r) |
| Viewing area | 376.320 (h) x 301.056 (v) mm |
| LED backlight lifespan | 50.000 hrs |
| Response time | Tr 1.3 ms, Tf 3.7 ms |
| Temperature (operating/storage) | Operating 0°C – +40°C Storage -20°C – +60°C |

Materials

| | |
|---------|---|
| Cabinet | Available with front in aluminium (A), stainless steel (I), or glass (G). With mounting box |
|---------|---|

Connectivity

| | |
|--------------|--|
| Input signal | DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant |
|--------------|--|

Electrical

| | |
|---|----------------------------|
| Lowv voltage (external power supply) | 100-240Vac, 50/60Hz, 12Vdc |
| Power consumption | 80W |

Mechanical

| | |
|----------------------|---|
| Dimensions | 448 x 373 x 72.4 mm [17.64"x14.69"x2.85"] |
| Weight | 5.5 Kg / 12.1 lbs (Stainless Steel & Aluminium) |
| | 6 Kg / 13.2 lbs (Glass) |
| Shipping Dimensions: | |
| Weight | 6.5 Kg / 14.3 lbs (Stainless Steel & Aluminium) |
| | 7 Kg / 15.4 lbs (Glass) |
| Shipping Box | 480 x 380 x 160 mm |

OPTIONS

- Touch screen
- Integrated industrial PC
- RS-232 remote control
- HD-BaseT for Video and Power over a single Cat5 cable


CERTIFICATIONS

- CE

WARRANTY

- 2 years general warranty

CONNECTIVITY PANEL

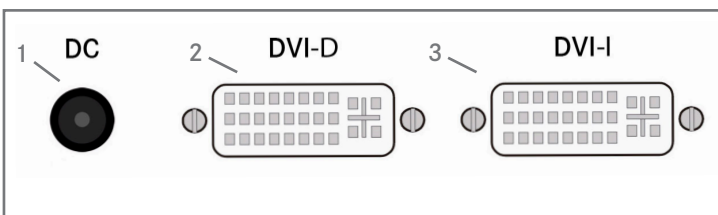

CONNECTIVITY

- 1- Power input
- 2- DVI 2 video input
- 3- DVI 1 / DVI A video input

ARCHITECT'S SPECIFICATIONS

Professional 19" widescreen in-wall monitor. Frame available in aluminium, stainless steel or glass. DVI-I and DVI-D connectors. HDCP compliant inputs. Back box with hook system for easy installation. External power supply.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

