

Static

Wall mount display



FEATURES

- Elegant brushed stainless steel frame
- Protective glass panel with black marking
- Maintenance free
- HDCP compliant
- Easy to install
- Energy saving design

GENERAL

Static displays have been designed to be wall mounted.

Static are elegant, exclusive and professional monitor for meeting and conference rooms, corporate reception areas and hotels. Static has an elegant brushed stainless steel frame and a protective glass panel with black marking. With its slim design, the monitor takes a minimum space and fits onto standard wall brackets and can also be built into the wall. They are available from 32" to 82".

TECHNICAL SPECIFICATIONS

Display

Size	FULL HD 42.02" TFT Active Matrix, widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	500 cd/m2
Contrast ratio	3200:1
Pixel	0.4845 (h) x 0.4845 (v) mm
Viewing angle	89° / 89° (u/d) / 89° / 89° (l/r)
Viewing area	930.24 (h) x 523.26 (v) mm
LED backlight lifespan	50.000 hrs
Response time	Tg.g 8 ms
Temperature <i>(operating/storage)</i>	Operating 0°C – +40°C Storage -20°C – +60°C

Materials

Cabinet	Front steel brushed frame with a protection and decorative serigraphy glass
---------	---

Connectivity

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
--------------	--

Monitor Control

	RS232
--	-------

Electrical

Lowv voltage <i>(external power supply)</i>	100-240Vac, 47/63Hz
Power consumption	230W

OPTIONS

- RS-232 remote control


CERTIFICATIONS

- CE

WARRANTY

- 2 years general warranty

CONNECTIVITY PANEL

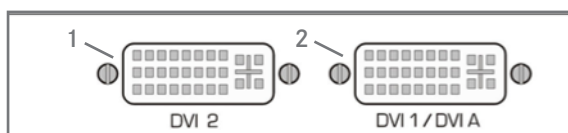

CONNECTIVITY

- 1- DVI-2 video input
- 2- DVI-1 / DVI-A video input

ARCHITECT'S SPECIFICATIONS

Professional 42.02" widescreen monitor. Stainless steel frame with protection and decorative front glass. DVD-I and DVI-D connectors. HDCP compliant input. VESA mounting compatible.