

Dynamic2

Aluminium retractable motorised monitor







FEATURES

- Automatic 20° inclination
- Passive cover plate
- Interactive Setup Display
- Maintenance free

- HDCP compliant
- Energy saving design
- Serial control & Remote diagnose

GENERAL

Dynamic2 monitors have been designed for installation into tables or desks.

Dynamic2 are elegant monitors built from a solid aluminium block. They have a vertical motorised movement with automatic 20° inclination to ensure the best ergonomics, viewing angle and visibility. This automatic tilting system provides a fast and silent response and highly reliable, maintenance-free solution. Dynamic2 have squared edges for a classic and timeless look. The range is available from 12" to 22" and it can be supplied with adjustable tilt, touch screen, camera, single or double retractable microphones, speakers, voting system and multimedia connectors, among others.

The anodised aluminium housing can be customised in different colours and finishes. The safety system stops the movement if any resistance is detected for a secure environment.

The standard top-table cover plate is made of brushed stainless steel. It can optionally be supplied with a matt finish or it can disappear when the product is prepared for underneath installation.

Dynamic2 monitors are remotely controllable and diagnosable through the ERT interfaces in an easy and cost effective way.

TECHNICAL SPECIFICATIONS

Dis	p	la	٧

)		
Size	FULL HD 21.5" TFT Active Matrix, widescreen	
Resolution	1920 (h) x 1080 (v)	
Brightness	350 cd/m2	
Contrast ratio	1000:1	
Pixel	0.24975 (h) x 0.24975 (v) mm	
Viewing angle	89°/89°(L/R) / 89°/89° (U/D)	
Viewing area	476.064 (h) x 267.786 (v) mm	
LED backlight lifespan	50.000 hrs	
Response time	Tr 12ms, Tf 10ms	
Temperature (operating/storage)	Operating 0°C - +40°C Storage -20°C - +60°C	
Materials		
Frame	Anodised Aluminium	
Cover plate	Stainless steel, matt or prepared for underneath installation (to be veneered or for table hedge)	
Connectivity		
Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant	
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol	
GPI (SubD9)	Up/Down control	

Control

RJ45, RS-422 (I/O)		
Addressing		
Termination switch		
GPI		
IR Remote control (monit	cor adjustments): 1/5	
Movement's Control		
User interface on monitor	(Up/Down)	
Remote	RS-422 I/O/GPI	
Electrical		
Low voltage (external power supply)	100-240Vac, 47/63Hz, 12Vdc	
Power consumption	70W	
Mechanical		
Monitor Dimensions:		
Screen	538.8 x 300 x 27 mm [21.21"x11.79"x1.06"]	
Upper cover plate	636 x 95 x 3 mm [25.04"x3.74"x0.12"]	
Housing below the table	621 x 590 x 80 mm [24.45"x23.23"x3.15"]	
Weight	20.2 Kg / 44.5 lbs	
Shipping Dimensions:		
Weight	21.5 Kg / 47.3 lbs	
Shipping Box	742 x 177 x 727 mm	

OPTIONS

- DynamicLoop
- DynamicShare
- Stainless steel box for keyboard and mouse
- Matte cover plate
- Touch screen
- USB camera
- Composite video camera
- HD-SDI camera
- Built in DynamicTalk
- Motorised retractable synchronised single microphone
- Dual motorised synchronised microphones

CERTIFICATIONS


CE

- USB integrated on cover plate
- 2 USB integrated on cover plate
- USB power integrated on cover plate
- Customised cover plate with speaker, voting system, USB connector
- Prepared for underneath installation, cover plate prepared to be veneered
- Additional customised laser engraved logotype on the cover plate
- Monitor housing anodised in different colours
- · Adjustable tilt


WARRANTY

- 5 years limited warranty
- · 2 years general warranty

CONNECTIVITY PANEL



INTERACTIVE SETUP DISPLAY

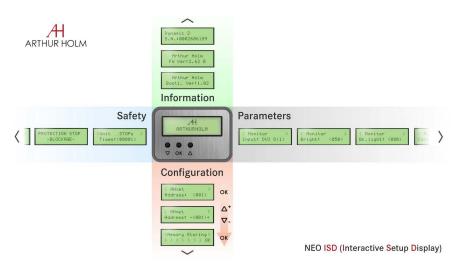

ARCHITECT'S SPECIFICATIONS

Single motor retractable 21.5" FullHD monitor with 20° of automatic inclination. Low voltage.Solid block of aluminium monitor housing in natural anodised finishing, with square corners design. Passive opening cover plate for enhanced reliability. DVI-I and DVI-D connectors, HDCP compliant inputs.

Compatible with AHnet open protocol over RS-422, allowing individual remote control of up to 30 units over a daisy chain CAT-5 or CAT-6 line. Additional control by means of the buttons integrated on the cover plate that can be activated or deactivated by using the AHnet protocol. Easy to read Interactive Set-Up Display (ISD) 2,2" LCD display allowing individual remote configuration, operation & troubleshooting without removing monitor from furniture integration.

CONNECTIVITY

- 1- AH net control interface
- 2- USB for service
- 3- GPI control
- 4- Power input
- 5- DVI-1 / DVI-A video input
- 6- DVI-2 video input

When connected to the AHERT interface the intuitive addressing system facilitates the address configuration, just by pressing a button. Embedded speed & protection presets for quick reset to factory values if required. Auto check feature for auto-diagnostic & internal protection functions. USB port for local firmware upgrade. Safety system detects obstructions (causing unit to stop). External power supply with 4-Pin XLR4 connector.

Bottom connectivity for easy access and removal of monitor. Monitor housing total depth of 590 mm, plus additional spacing for connectors. Adjustable parameters through AHnet or ISD allowing calibration and adjustment of mechanics. Diagnostic readout on ISD for service and support.

