


DB2

Aluminium retractable motorised monitor

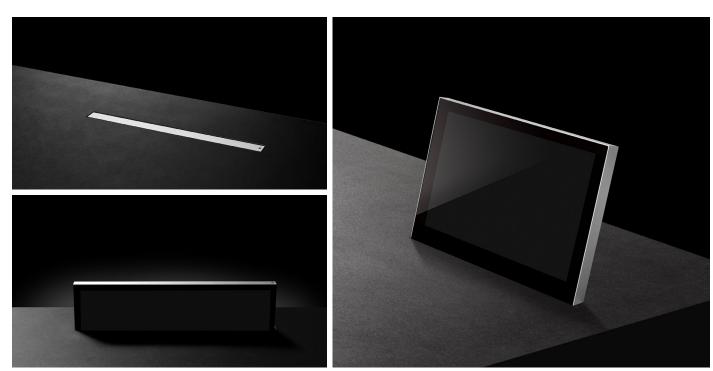

Features

- Vertical motorised monitor with up to 20° inclination
- Adjustable screen angle tilt
- No cover plate required (monitor completey streamlined within the furniture)
- One operation sensor on top of the aluminium housing (to rise and lower the screen and adjust the tilt angle)
- 20 mm thickness
- Front double sided unreflecting 2 sides coating 2 mm black edged glass

General

Arthur Holm's DB2 is a motorised retractable monitor range that creates minimum impact on the furniture's design. It is easy to integrate, intuitive to use (one simple operation sensor located on the top of the monitor) and almost invisible (no cover plate, neatly streamlined into the furniture) when not in operation. DB2 provides a harmonious silent drive with variable speeds. With a maximum thickness of 20 mm. This monitor range is elegant, beautiful from all angles and can be veneered for a seamless integration in the furniture, creating a long lasting user's experience and delivering an exceptional image's quality. We have selected the best possible aluminium finishing specifications in the world, providing the maximum technical and visual performance.

- Can be veneered
- Interactive Setup Display

reddot

design award

- Maintenance free
- HDCP compliant
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Individual monitor addressing
- AH-AMMC Auto Mechanical Movement Calibration

The screen is protected with an anti-reflective 2 side coating 2 mm black edged glass. DB2 are available from 10" to 23.8" with 2 DVI-HDCP compliant inputs and equipped with an Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speed, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: An auto mechanical calibration movement system. The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The AHlink Android and iOS App allows getting the monitor's serial number without removing the unit from the table and allows access to the setup and control menu.

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

AH24DB2

TECHNICAL SPECIFICATIONS

Display

Display	·
Size	4K 23.8" TFT Active Matrix, wides- creen format. LED backlight
Resolution	3840 (h) x 2160 (v)
Brightness	250 cd/m2
Contrast ratio	1000:1
Pixel	0.13725 (h) x 0.13725 (v) mm
Viewing angle	178°(v) 178°(h)
Viewing area	527.04 (h) x 296.46 (v) mm
LED backlight lifespan	30,000 hrs
Response time	Tg-g 14ms
Temperature (operating/storage)	Operating 0°C ~ +40°C Storage -20°C ~ +60°C
Materials	
Cabinet	Solid mechanised aluminium housing with anodised finish. Electrically powered lift system with variable speed. 20° inclination. Front black serigraphed glass.
Connectivity	·
Input signal	VGA 2 x DisplayPort 2 x HDMI
RJ45 CAT6 (with loop)	Addressable RS422 monitor control by AHnet protocol

GPI (SubD9)	Up/Down control
Engine	
Control Up/Down	Buttons on cover plate, GPI, RS422
Electronic control	PWM
Control	
Monitor Control	RS422 (RJ45 CAT6)
Electrical	
External power supply	100-240 Vac, 47/63Hz, 12Vdc
Power consumption	60W
Accessories	
ERT	Ethernet interface unit
AH mcs	Monitor Control Software
Mechanical	- -
Monitor Dimensions:	
Screen	559.20 x 334.50 x 20mm
	JJ7.20 X JJ4.J0 X 2011111
	[22" x 13.16" x 0.79"]
Top frame	[22" x 13.16" x 0.79"] 559.20 x 20 mm
Top frame	[22" x 13.16" x 0.79"]
Top frame Housing below the table	[22" x 13.16" x 0.79"] 559.20 x 20 mm [22" x 0.79"] 638 x 657 x 82 mm
	[22" x 13.16" x 0.79"] 559.20 x 20 mm [22" x 0.79"]
·	[22" x 13.16" x 0.79"] 559.20 x 20 mm [22" x 0.79"] 638 x 657 x 82 mm
Housing below the table	[22" x 13.16" x 0.79"] 559.20 x 20 mm [22" x 0.79"] 638 x 657 x 82 mm [25.13" x 25.86" x 3.23"]
Housing below the table Weight	[22" x 13.16" x 0.79"] 559.20 x 20 mm [22" x 0.79"] 638 x 657 x 82 mm [25.13" x 25.86" x 3.23"]
Housing below the table Weight Shipping Dimensions:	[22" x 13.16" x 0.79"] 559.20 x 20 mm [22" x 0.79"] 638 x 657 x 82 mm [25.13" x 25.86" x 3.23"] 25 Kg / 55.12 Lbs

Options

• Monitor housing anodised in black


WARRANTY

- 5 years limited warranty
- 2 years general warranty


ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

CONNECTIVITY PANEL

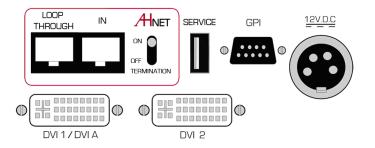

INTERACTIVE SETUP DISPLAY

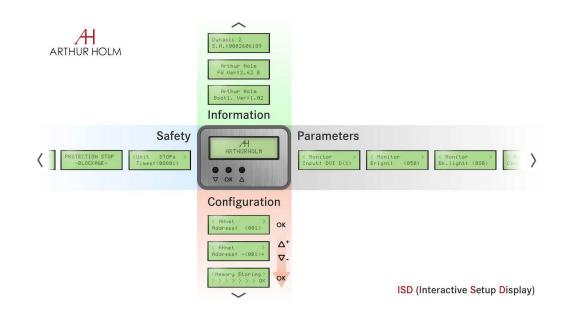

ARCHITECT'S SPECIFICATIONS

Vertically retractable motorised 23.8" 4K resolution, professional monitor. The monitor housing shall be made of milled anodised aluminium with a maximum thickness of 20 mm and the screen shall be protected with an anti-reflective 2 side coating black-edged 2 mm glass. The monitor shall allow its installation in a furniture opening with a maximum width of 24 mm and shall be designed to be veneered to match the furniture's surface.

The monitor housing shall be flush with the table when the monitor is in recessed position.

A capacitive button that shall be placed at the top of the monitor shall activate the monitor's movements. The monitor shall have a brightness of 250 cd/m2 a contrast ratio of 1000:1 and a backlight lifespan of 30,000 hours.


The monitor shall provide 1 VGA, 2 DisplayPort, 2 HDMI inputs.

The monitor shall provide an addressable RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speed and the control of the brightness, contrast and backlight. The monitor shall be able to run an auto-adjustment program to reset the factory setups.

The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS App providing information about the monitor's serial number, and providing access to the control and to the setup menu.

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

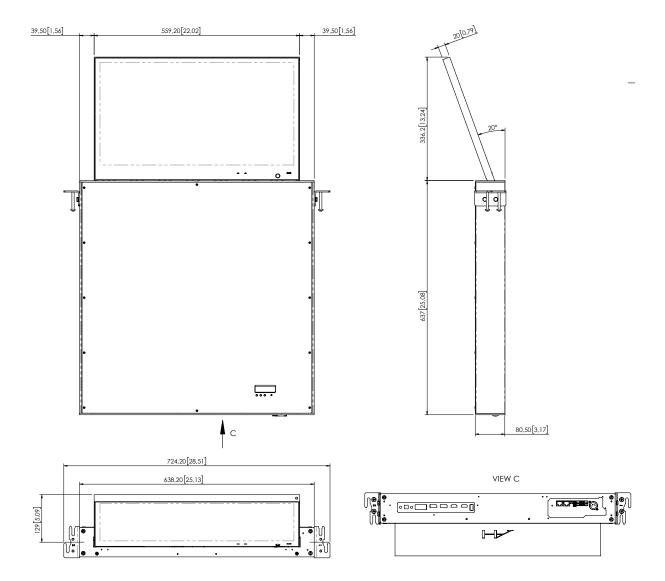

ARTHUR HOLM


Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design Danish craftsmanship, Mediterranean soul

AH24DB2

General Dimensions

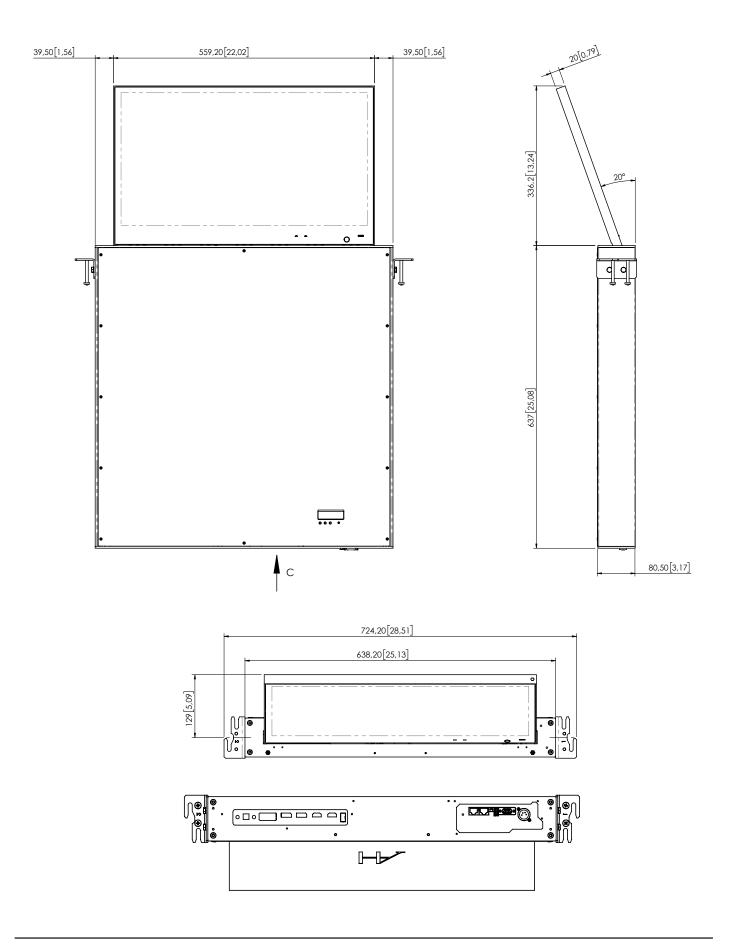

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com