


DB₂

Aluminium retractable motorised monitor





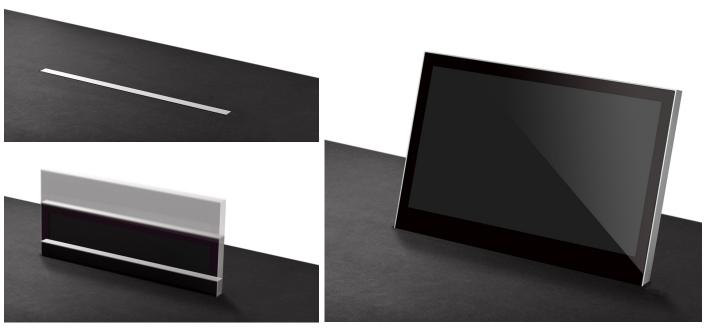

FEATURES

- Vertical motorised monitor with up to 20° inclination
- Adjustable screen angle tilt
- No cover plate required (monitor completey streamlined within the furniture)
- One operation sensor on top of the aluminium housing (to rise and lower the screen and adjust the tilt angle)
- 20 mm thickness
- Front double sided anti-reflecting 2 sides coating 2 mm black edged glass

Arthur Holm's DB2 is a motorised retractable monitor range that creates minimum impact on the furniture's design. It is easy to integrate, intuitive to use (one simple operation sensor located on the top of the monitor) and almost invisible (no cover plate, neatly streamlined into the furniture) when not in operation. DB2 provides a harmonious silent drive with variable speeds. With a maximum thickness of 20 mm, this monitor range is elegant, beautiful from all angles and can be veneered for a seamless integration in the furniture, creating a long lasting user's experience and delivering an exceptional image's quality. We have selected the best possible aluminium finishing specifications in the world, providing the maximum technical and visual performance.

- Can be veneered
- Interactive Setup Display
- Maintenance free
- HDCP compliant
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Individual monitor addressing
- AH-AMMC Auto Mechanical Movement Calibration

The screen is protected with an anti-reflective 2 side coating 2 mm black edged glass. DB2 are available from 10" to 23.8" and equipped with an Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speed, safety settings, brightness, contrast and backlight. The monitors are equipped with AH-AMMC: An auto mechanical calibration movement system. The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The AHlink Android and iOS app allows getting the monitor's serial number without removing the unit from the table and allows access to the setup and control menu.

TECHNICAL SPECIFICATIONS

D	is	pΙ	ay

Size	4K 23.8" TFT Active Matrix, widescreen format. LED backlight	
Resolution	3840 (h) x 2160 (v)	
Brightness	250 cd/m2	
Contrast ratio	1000:1	
Pixel	0.13725 (h) x 0.13725 (v) mm	
Viewing angle	178°(v) 178°(h)	
Viewing area	527.04 (h) x 296.46 (v) mm	
LED backlight lifespan	30,000 hrs	
Response time	Tg-g 14ms	
Temperature (operating/storage)	Operating 0°C ~ +40°C Storage -20°C ~ +60°C	
Materials		
Cabinet	Solid mechanised aluminium housing with anodised finish. Electrically powered lift system with variable speed. 20° inclination. Front black serigraphed glass.	
Cabinet	housing with anodised finish. Electrically powered lift system with variable speed. 20° inclination.	
	housing with anodised finish. Electrically powered lift system with variable speed. 20° inclination.	
Connectivity	housing with anodised finish. Electrically powered lift system with variable speed. 20° inclination. Front black serigraphed glass. VGA 2 x DisplayPort	

6


Control Up/Down	Buttons on cover plate, GPI, RS422	
Electronic control	PWM	
Control		
Monitor Control	RS422 (RJ45 CAT6)	
Electrical		
External power supply	100-240 Vac, 47/63Hz, 12Vdc	
Power consumption	60W	
Accessories		
ERT	Ethernet interface unit	
Mechanical		
Monitor Dimensions:		
Screen	559.20 x 334.50 x 20mm	
	[22" x 13.16" x 0.79"]	
Top frame	559.20 x 20 mm	
	[22" x 0.79"]	
Housing below the table	638 x 657 x 82 mm	
	[25.13" x 25.86" x 3.23"]	
Weight	25 Kg / 55.12 Lbs	
Shipping Dimensions:		
Weight	26 Kg / 57.32 Lbs	
Shipping Box	735 x 175 x 745 mm	
	[28.9" x 6.8" x 29.3"]	

OPTIONS


Monitor housing anodised in black

WARRANTY

- 5 years limited warranty
- 2 years general warranty

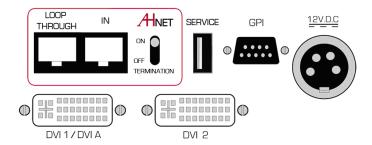

INTERACTIVE SETUP DISPLAY

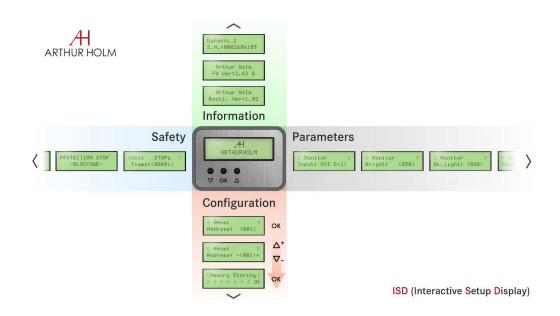

ARCHITECT'S SPECIFICATIONS

Vertically retractable motorised 23.8" 4K resolution, professional monitor. The monitor housing shall be made of milled anodised aluminium with a maximum thickness of 20 mm and the screen shall be protected with an anti-reflective 2 side coating black-edged 2 mm glass. The monitor shall allow its installation in a furniture opening with a maximum width of 24 mm and shall be designed to be veneered to match the furniture's surface.

The monitor housing shall be flush with the table when the monitor is in recessed position.

A capacitive button that shall be placed at the top of the monitor shall activate the monitor's movements. The monitor shall have a brightness of 250 cd/m2 a contrast ratio of 1000:1 and a backlight lifespan of 30,000 hours. The monitor shall provide 1 VGA, 2 DisplayPort, 2 HDMI inputs.

The monitor shall provide an addressable RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speed and the control of the brightness, contrast and backlight. The monitor shall be able to run an auto-adjustment program to reset the factory setups.

The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS App providing information about the monitor's serial number, and providing access to the control and to the setup menu.

