


DynamicTalkB

Motorised microphone lift for boundary microphones

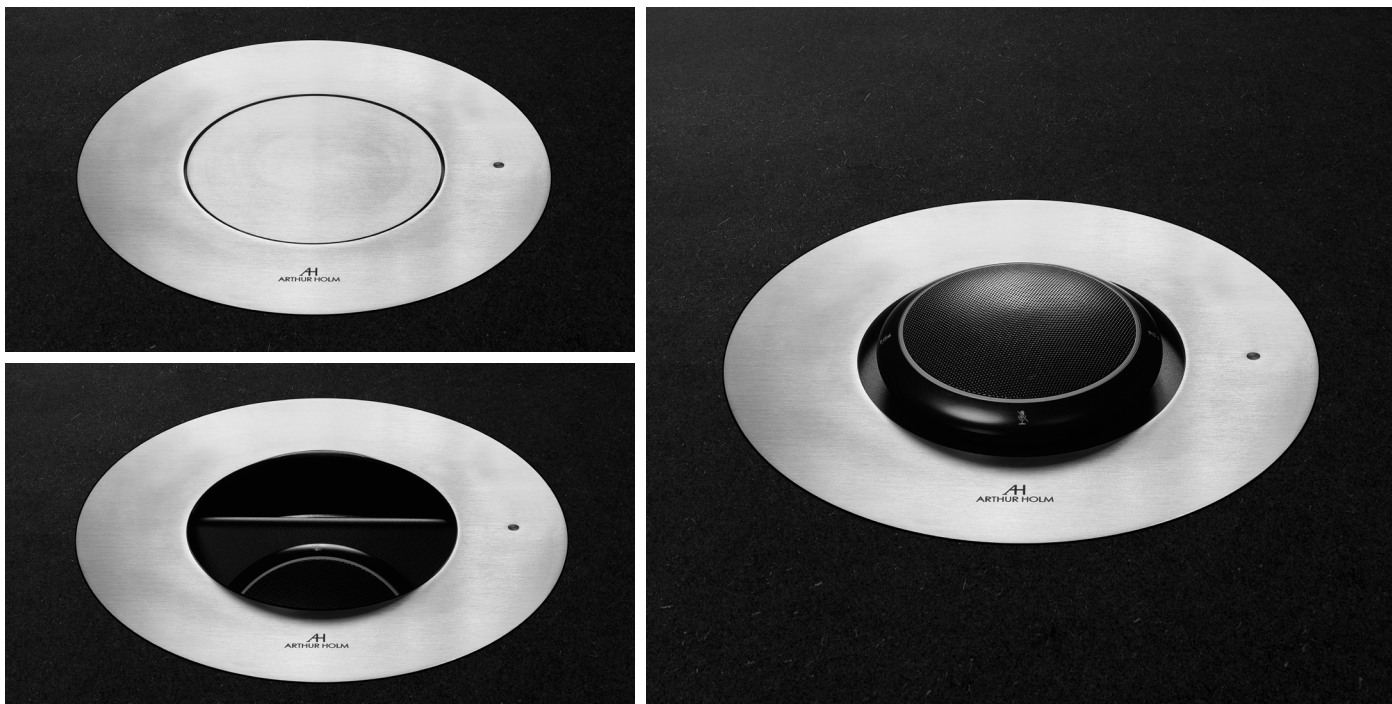

FEATURES

- Motorised lift for boundary microphone
- Touch control sensor on cover plate
- Wireless interface set-up through AHLINK app
- Compact, space optimising and stylish solution
- Silent, elegant and durable system
- Ethernet control and remote diagnosis
- Easy installation and maintenance free
- PoE

GENERAL

Motorised microphone lift for boundary microphones and similar, controllable through network or directly on the device using the flush mounted touch control sensor. Integrated wireless set-up and diagnosis through AHLINK app.

The Arthur Holm DynamicTalkB microphone lift is designed to hide boundary microphones when not in use with a smooth, elegant and silent movement. The microphone lift is capable of providing commands

for automatic mute of the microphone (depending on the model and maker of the microphone) when moving and in storage position. The microphone lift is powered using PoE making it easy and compact to install and control. The housing is made out of steel and the upper cover plate is made in stainless steel.

The microphone lift is available in brushed stainless steel or black matt finishing. Other colours are available on request.

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to changes without previous notice.

TECHNICAL SPECIFICATIONS

Materials

Housing	Brushed stainless steel or black matt finish
---------	--

Connectivity

Power over Ethernet	
Ethernet AHnet commands	

Engine

Control Up/Down	Touch control sensor on cover plate
RJ45 CAT6	
Ethernet AHnet commands	

Electrical

External power supply	100-240 Vac, 50/60Hz, PoE
Power consumption	30W

Mechanical

Case Dimensions	
Upper cover plate	Ø 282 mm [11.09"]
Housing below the table	Ø 269,40 x 234,50 mm [10.61" x 9.23"]
Weight	8 Kg

Shipping Dimensions

Weight	8,5 Kg
Shipping Box	365 x 365 x 370 mm [14.37" x 14.37" x 14.57"]

OPTIONS

- Motorised housing painted in customised colours
- Gold, bronze or black finish


CERTIFICATIONS

- CE

WARRANTY

- 2 years general warranty

CONNECTIVITY PANEL

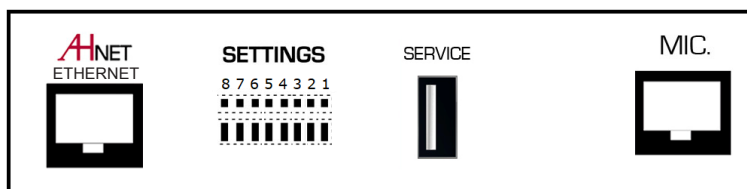

ARCHITECT'S SPECIFICATIONS

Motorised microphone lift for boundary microphones and similar, controllable through network or directly on the device using the flush mounted touch control sensor. Integrated wireless set-up and control through AHLINK app.

The Arthur Holm DynamicTalkB microphone lift is designed to hide boundary microphones when not in use with a smooth elegant and silent movement.

The microphone lift is capable of providing commands for automatic mute of the microphone (depending on the model and maker of the microphone) when moving and in storage position. The housing is made out of steel and the upper cover plate is made in stainless steel.

The microphone lift is available in brushed stainless steel or black matt finishing. Other colours are available on request.

Raising and lowering of microphone controlled by touch sensor on upper cover plate and external ethernet control by AHnet protocol (RJ45).

PoE (Power over Ethernet). Power and control over shielded CAT6.

Wireless interface set-up through AHLINK app.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to changes without previous notice.

