
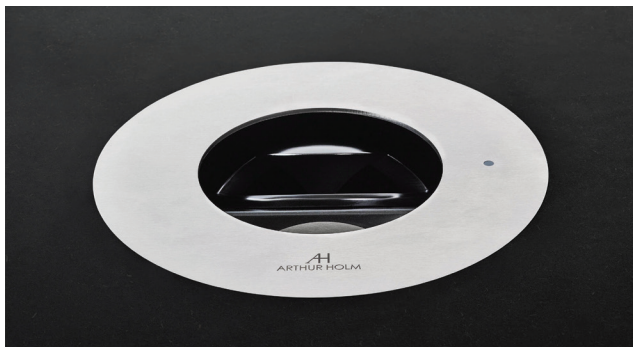


## DynamicSpeaker

Motorised loudspeaker for integration in desks

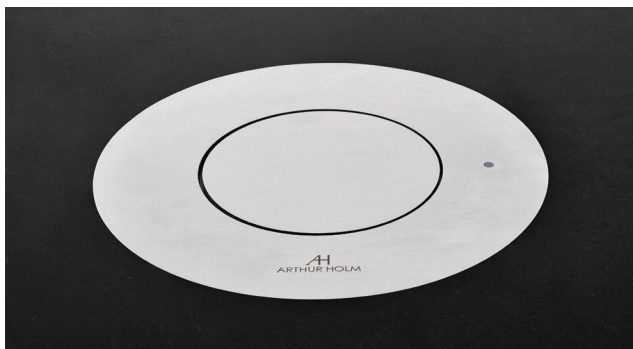

### FEATURES

- 360 degrees loudspeaker
- 4" 2-Way coaxial speaker, bass reflex
- 2 x 36W class-D bi-amplifier integrated
- Acoustic omnidirectional diffuser
- DSP integrated
- Balanced line input
- RS-422 controllable
- Near field audio reproduction
- Speech intelligibility enhancement
- Matching surface, ready for veneer
- Remotely controllable
- Wooden speaker enclosure
- Steel structure
- Low mechanical noise level
- AHlink wireless set-up interface
- Remote support interface
- External power supply

### GENERAL

Motorised loudspeaker for integration in desks. Compact, omnidirectional 360 degrees Class-D active speaker, two way coaxial driver, integrated DSP technology. System controlled through AHnet and also through AHlink: a new wireless app for control and set-up.

The Arthur Holm DynamicSpeaker is designed to be hidden when not in use with a smooth, elegant and silent movement.

### BENEFITS

- Natural sound direction
- Speech intelligibility
- High gain before feedback
- Close proximity to user
- Limited audio pollution
- Low ambient acoustic influence
- Balanced sound level distribution
- No building work required

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to changes without previous notice.

TECHNICAL SPECIFICATIONS

**Audio features**

4” coaxial loudspeaker
Class-D 2-way bi-amplified
RMS power 2 x 36.5W
360° dispersion
Balanced analogue audio input. Level line +4dB
Internal DSP
Frequency response: 100Hz. - 10KHz. (± 7.5 dB)
Adjustable gain through AHnet (RS422 Protocol)
Mute function through AHnet (RS422 Protocol)

**Materials**

Brushed stainless steel
Steel
Aluminium
Wood

**Finishing**

Speaker driver mat black
Speaker diffuser mat black, non-reflecting
Cover plate in brushed stainless steel / mat black / white
Black housing

**Connectivity**

USB Port for software update
XLR-4 input

**Engine**

Control Up/Down	Capacitive touch control sensor on cover plate
RJ45 CAT6	Addressable RS422 control by AHnet protocol

**Electrical**

External power supply	100-240 Vac, 50/60Hz. 24VdC
Power consumption	90W

**Mechanical**

Case Dimensions	
Upper cover plate	Ø 264 mm [10.39”]
Weight	8 Kg 17.63 lbs

**Shipping Dimensions**

Weight	8.5 Kg 18.73 lbs
Shipping Box	36,5 x 36,5 x 37cm [14.37” x 14.37” x 14.57”]

ARCHITECT’S SPECIFICATIONS

The motorised active loudspeaker shall be two-way, in-surface system consisting of a 4” coaxial omnidirectional transducer mounted in a wooden ported enclosure with 2 x 36W class-D bi-amplifier and DSP technology integrated, omnidirectional acoustic diffuser. The mechanical housing shall be in steel with aluminum parts and stainless steel upper cover.

System controlled through AHnet and through AHlink (wireless app for control and set-up).

Input connection shall be made via a 4-pin lockable XLR connector, 2 EJ45 connectors with loop-through, 2 x USB and PCB block connectors.

Dispersion shall be 360° up to 10kHz. The on-axis frequency response shall be 100Hz-10kHz +/- 7dB and the

loudspeaker shall produce a maximum SPL of 105dB peak measured at 1 metre. Power handling shall be 74W AES, 104W peak.

The loudspeaker shall be equipped with two rotary switches for selection of address and set-ups, 2 x USB ports for firmware upgrades.


The mechanical movement shall be made using only one motor, a combination of a linear and circular movement shall move the transducer enclosure down, rotate it and lift up the transducer and the acoustic diffuser so the transducer is at level with the housing surface.

Dimensions (OD x D) shall be 264mm x 214.5mm [10.39” x 8.44”] closed. 264mm x 217.5 [10.39” x 8.56”] open. Weight shall be 8 kg (17.63lbs).


The loudspeaker shall be the Arthur Holm AHDSR42W.

FREQUENCY RESPONSE


All measurements are taken with the speaker installed in a 1 m x 1 m wooden surface.

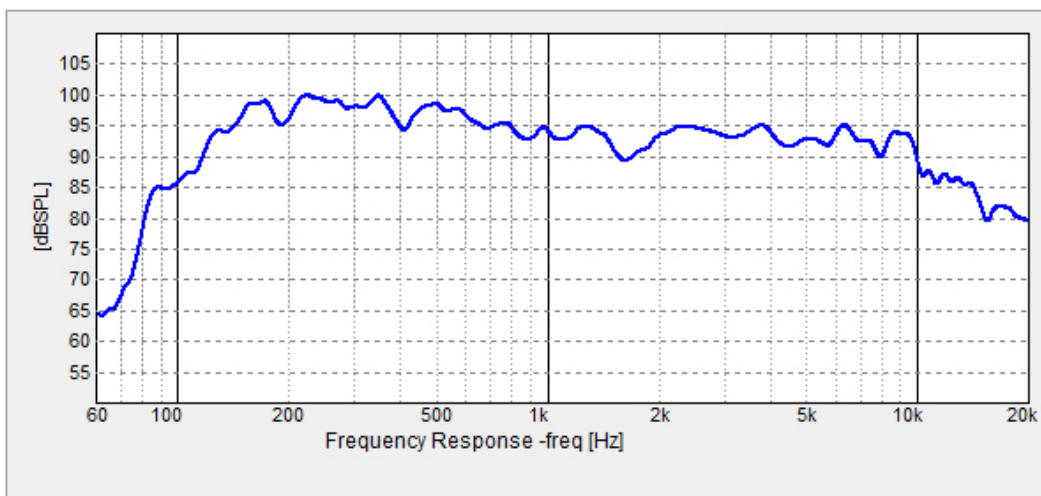


HORIZONTAL




125Hz




250Hz




500Hz




1 kHz



2kHz




4kHz




8kHz

POLAR PATTERNS


VERTICAL




125Hz




250Hz




500Hz




1 kHz



2 kHz



4 kHz




8 kHz

ARTHUR HOLM




Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to changes without previous notice.

GENERAL DIMENSIONS

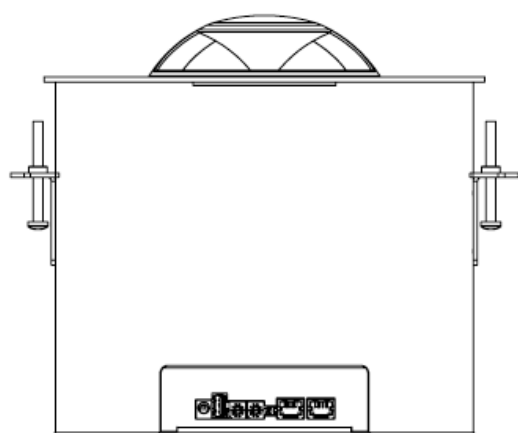

VIEW C  
 180,00°

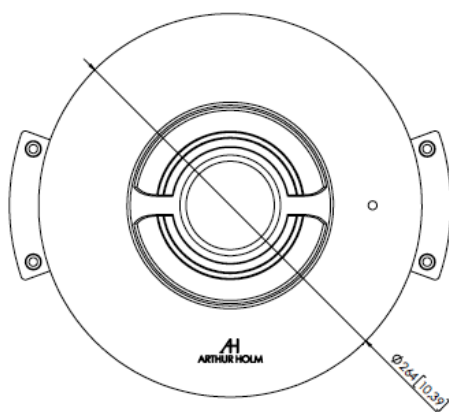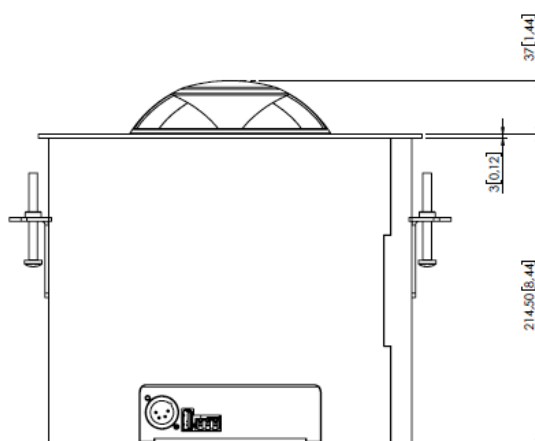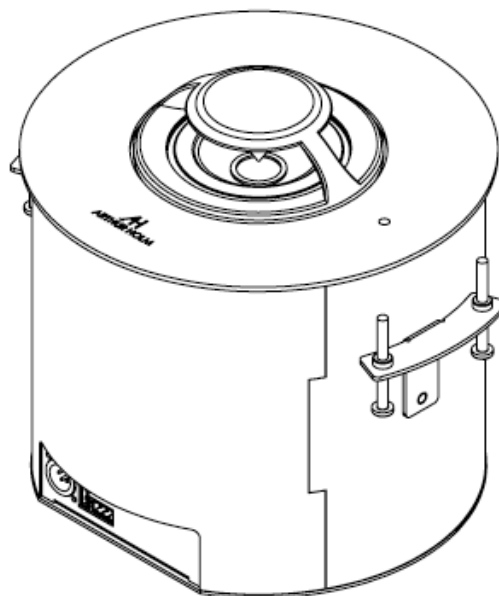

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
 www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to changes without previous notice.