

DynamicX2

Aluminium retractable motorised monitor







FEATURES

- Single engine for up/down and tilt movements
- Automatic 20° tilt angle
- · Milled aluminium housing
- Front double sided anti-reflecting 2 sides coating 3 mm black edged glass
- Interactive Setup Display (ISD)

- 2 DVI I/HDCP compliant
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Individual monitor addressing
- Auto Mechanical Movement Calibration (AH-AMMC)

GENERAL

Arthur Holm DynamicX2 is a motorised retractable product range that provides silent, reliable and harmonic movements by the use of a patented solution with one only engine. This automatic system is equipped with a variable speed system to raise, lower and tilt 20° to ensure the best ergonomics, viewing angle and visibility. We have selected the best possible aluminium finishing specifications in the providing the maximum technical visual and performance. DynamicX2 have slightly curved edges for a contemporary and longstanding look and the screen is protected with an anti-reflective 2 side coating 3 mm black edged glass.

DynamicX2 are available from 15.6" to 23.8", with 2 DVI-HDCP compliant inputs and equipped with an Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speed, brightness, settings, contrast backlight. The monitors are equipped with an Auto Mechanical Calibration Movement System. The use of the Arthur Holm's **ERT** will address configuration of all the monitors the installed in a table by simply pressing a button. The AHlink Android and iOS app allows getting the monitor's serial number without removing the unit from the table and allows access to the setup and control menu

TECHNICAL SPECIFICATIONS

Display	
Size	FULL HD 17.3" TFT Active Matrix
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m2
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/80° (u/d) / 80°/80° (l/r)
Viewing area	381.888 (h) x 214.812 (v) mm
LED backlight lifespan	50,000 hrs
Response time	Tr 37 ms, Tf 3 ms
Temperature (operating/storage)	Operating 0°C - +40°C Storage -20°C - +60°C
Materials	
Frame	Anodised Aluminium
Glass	AR 2-side with an anti-reflective coating on the glass surface. Thickness: 3.0 ± 0.3 mm
Cover plate	Stainless steel, matt or prepared for underneath installation (to be veneered)
Connectivity	
Input signal	DVI-I (1 input) – HDCP Compliant - Digital / Analog DVI-D (1 input) – HDCP Compliant - Digital
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol
GPI (SubD9)	Up/Down control

USB Connector for service

Control

•••••	
RJ45, RS-422 (I/O)	
Addressing	
Termination switch	
GPI	
IR Remote control (monitor adjustments): 1/5	
Movement's Control	
User interface on monitor	(Up/Down)
Remote	RS-422 I/O/GPI
Electrical	
Low voltage (external power supply)	100-240Vac, 47/63Hz, 12Vdc
Power consumption	50W
Mechanical	
Monitor Dimensions:	
Screen	443 x 258 x 25 mm [17.44" x10.15" x 0.98"]
Upper cover plate	540 x 95 x 3 mm [21.26" x 3.74" x 0.12"]
Housing below the table	525 x 590 x 80 mm [20.67" x 23.23" x 3.15"]
Weight	19.1 kg / 42.1 lbs
Shipping Dimensions:	
Weight	20.1 kg / 44.3 lbs
Shipping Box	635 x 185 x 725 mm

OPTIONS


- Projected capacitive multi-touch screen
- Monitor housing anodised in black
- Painted cover plate
- DynamicLoop
- DynamicShare
- Built-in camera

- Built-in DynamicTalk
- Built-in-third-party conference systems
- Integrated connectors on cover plate
- Retractable HDMI cable
- Underneath installation: prepared to be veneered
- Laser engraved logotype on cover plate

WARRANTY

- 5 years limited warranty
- 2 years general warranty


CONNECTIVITY PANEL

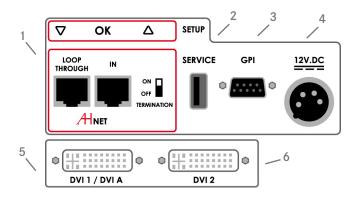

CONNECTIVITY

- 1- AHnet control interface
- 2- USB for Service
- 3- GPI control
- 4- Power input
- 5- DVI 1 / DVI A video input
- 6- DVI 2 video input


INTERACTIVE SETUP DISPLAY

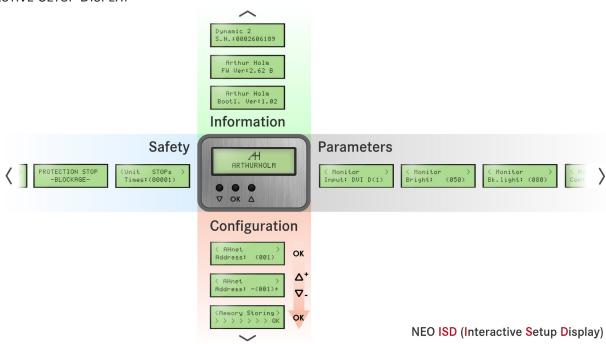


CONSULTANTS, ARCHITECTS AND ENGINEERS SPECIFICATIONS:

Vertically retractable motorised 17.3" Full HD professional monitor. The monitor housing shall be made of milled anodised aluminium and the screen shall be protected with anti-reflective 2 side coating black edged 3 mm glass. The monitor shall make the up/down and tilt movements with one only engine. The monitor cover plate shall provide a passive opening system and shall be made of 3 mm brushed stainless steel. The monitor shall have a brigthness of 400 cd/m2, a contrast ratio of 600:1 and a backlight lifespan of 50,000 hours.

The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP monitor manufacturer. The monitor shall provide an addressable RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speeds and the control of the brightness, contract and backlight. The monitor shall be able to run an auto-adjustment program to reset the factory setups. The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS app providing information about the monitor's serial number, and providing access to the control and to the setup menu.

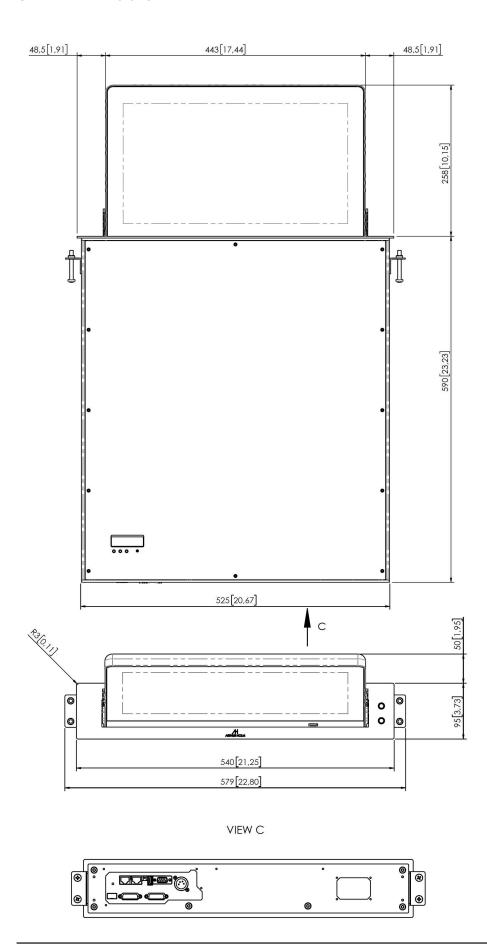

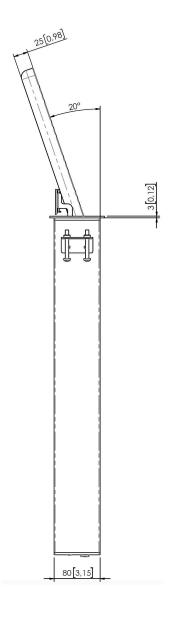

ARTHUR HOLM

Albiral Display Solutions SL. · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bacelona, Spain · +34 938 502 376 · marketing@arthurholm.com www.arthurholm.com