

## AHPylon

HDCP compliant Glass Podium



### FEATURES

- Mobile podium entirely made of security black glass
- Seamless exclusive 45° miter construction
- Touch screen
- Opening system to allow to store computers
- Lockable hidden wheels

### GENERAL

Arthur Holm AHPylon serves as a speaker podium or an interactive information podium. The podium can be configured to match each individual needs. Its design permits an easy displacement of the podium and the hidden lock access point prevents from unwanted movements and unauthorized access to the internal components of the pylon. The hidden wheels create an elegant and unobstructive design while making the podium always mobile.

Interactive solutions improve the user engagement and experience, no matter what environment – from a reception in a company, a wayfinding directory to lecterns and speaker podiums.

The design should be attractive, convenient, robust and versatile. It should be prepared to accommodate computers, microphones and other peripheral for different communication and presentation purposes. Podiums should also include wheels to be moved easily and an internal cable management system and a sober and streamlined look will ensure the fusion with any interior design.

#### ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

**Display**

Size	Full HD 46" TFT Active Matrix, widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	500 cd/m2
Contrast ratio	4000:1
Pixel	0.53025 (h) x 0.53025 (v) mm
Viewing angle	89°/89° (u/d) - 89°/89° (l/r)
Viewing area	1018.08(h) x 572.67(v) mm
LED lifespan	50,000 hrs
Response time	Tg-g 6.5 ms
Touch screen	Dual touch
Temperature (operating/storage)	Operating 0°C – +50°C Storage -20°C – +60°C

**Materials**

Glass cabinet	10 mm safety piano black glass / 45 degrees miter
---------------	---

**Connectivity**

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
--------------	--

XLR connector for microphones

**Mechanical**

Dimensions:

Pylon Dimensions	1108 x 1372 x 715 mm
------------------	----------------------

**Pylon enclosure specifications**

<b>Light properties</b>	
Light transmissions: $\tau_v$ [%]	0
External light reflection: $\rho_v$ [%]	4
Internal light reflection: $\rho_{vi}$ [%]	4
Colour rendering index: Ra [%]	

<b>Energy properties</b>	
Solar factor: g [%]	23
External energy reflection: $\rho_e$ [%]	4
Internal energy reflection: $\rho_{ei}$ [%]	4
Direct energy transmission: $\tau_e$ [%]	0
Energy absorption glass 1: $\alpha_{e1}$ [%]	96
Total energy absorption: $\alpha_e$ [%]	96
Shading coefficient: SC	0.26
UV transmission: $\tau_{uv}$ [%]	0
Selectivity	0.00

<b>Thermal properties</b>	
Thermal transmittance (vertical): $U_g$ (W/m <sup>2</sup> .K)	5.5

<b>Acoustic properties</b>	
Direct airborne sound insulation - EN 12758: $R_w$ (C;Ctr)(dB)	35 (-1; -3)

<b>Safety properties</b>	
Resistance to fire - EN 13501-2	NPD
Reaction to fire - EN 13501-1	NPD
Bullet resistance - EN 1063	NPD
Burglar resistance - EN 356	NPD
Pendulum body impact resistance - EN 12600	1B1
Explosion resistance - EN 13541	NPD

**OPTIONS**

- XLR 3 pin connector with shock mount
- Foldable tray for keyboard and mouse


**CERTIFICATIONS**

- CE
- FCC

**WARRANTY**

- 2 years general warranty

**CONNECTIVITY PANEL**

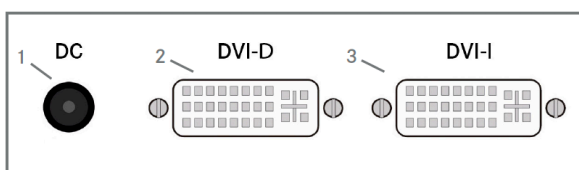

**CONNECTIVITY**  
 1- Power input  
 2- DVI 2 video input  
 3- DVI 1 / DVI A video input

**CONSULTANTS, ARCHITECTS AND ENGINEERS SPECIFICATIONS**


The podium shall be made of 10 mm. safety black glass with a seamless 45° miter construction. The podium shall provide hidden low resistance wheels with breaks. The podium shall provide a hidden access point to prevent access to the internal components and the unwanted release of the wheels. The podium shall not have any visible screw, mount or lock.

The 46" Full HD monitor shall have a brightness of 350 cd/m2, a contrast ratio of 4000:1 and a backlight lifespan of 50,000 hours. The monitor shall provide 2/ DVI inputs by a licensed HDCP manufacturer. The podium shall provide a capacitive projected multi-touch

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

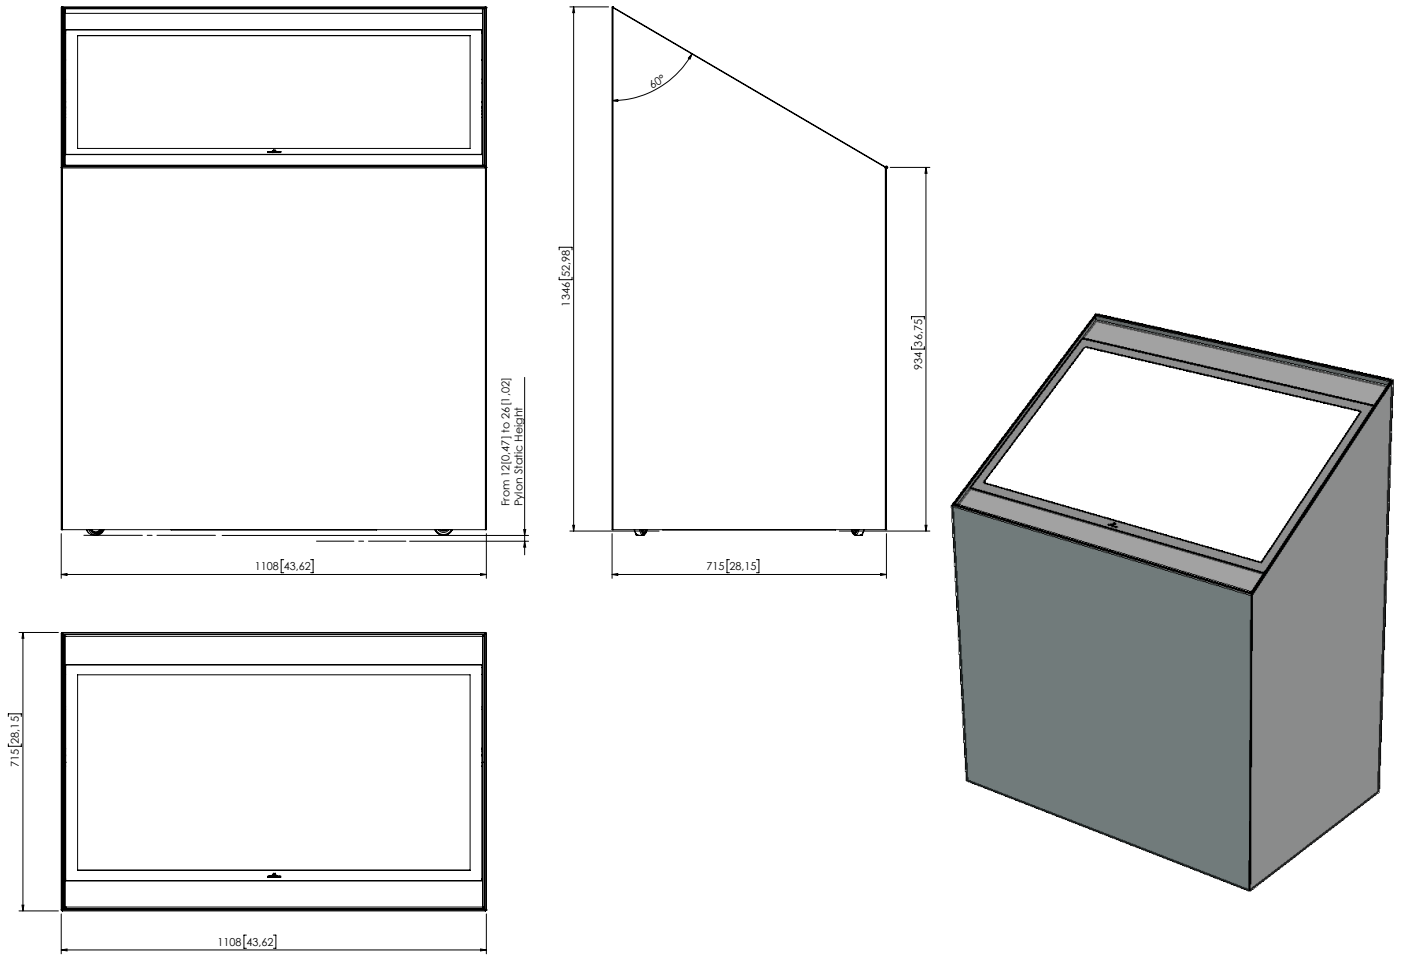

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design