



**Display**

Size	FULL HD 15.6" TFT Active Matrix, widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	450 cd/m2
Contrast ratio	800:1
Pixel	0.17925 (h) x 0.17925 (v) mm
Viewing angle	85°/85° (u/d) / 85°/85° (l/r)
Viewing area	344.16 (h) x 193.59 (v) mm
LED backlight lifespan	50,000 hrs
Response time	Tr + Tf 25 ms
Temperature (operating/storage)	Operating 0°C ~+40°C Storage -20°C ~+60°C

**Materials**

Monitor housing	Anodised Aluminium
-----------------	--------------------

**Connectivity**

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol
GPI (SubD9)	Up/Down control
USB	For service

**Control**

RJ45, RS-422 (I/O), AHNet protocol
Addressing
Termination switch
GPI

**Movement's Control**

User interface on monitor	(Up/Down)
Remote	RS-422 I/O, GPI

**Electrical**

External power supply	100-240 Vac, 47/63Hz, 12Vdc
Power consumption	50W

**Mechanical**

Monitor Dimensions:	
Weight	16 Kg / 35.2 Lbs
Shipping Dimensions:	
Weight	17 Kg / 37.4 Lbs
Shipping Box	740 x 610 x 175 mm [29.13" x 24.01" x 6.88"]

**OPTIONS**

- Projected capacitive multi-touch screen
- USB Power
- Synchronised mic

**WARRANTY**

- 5 years limited warranty
- 2 years general warranty

**CERTIFICATIONS**

- CE
- FCC
- IECCE



## CONNECTIVITY

- 1- AHnet control interface
- 2- Power input
- 3- DVI-D video input - digital
- 4- DVI-I video input - analog/ digital


### CONSULTANTS, ARCHITECTS AND ENGINEERS SPECIFICATIONS

The aluminum monitor shall provide a motorised lifting and angle adjustment with a single electrical engine. The monitor shall provide a manual horizontal adjustment (rotation towards the user) for the user's safety.

The monitor housing shall be made of milled anodised aluminium and shall have a brightness of 450 cd/m<sup>2</sup>, a contrast ratio of 800:1 and a backlight lifespan of 50,000 hours.

The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP monitor manufacturer. The monitor shall provide an addressable

RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speeds and the control of the brightness, contrast and backlight. The monitor shall be able to run an autoadjustment program to reset the factory setups. The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS app providing information about the monitor's serial number, and providing access to the control and to the setup menu.

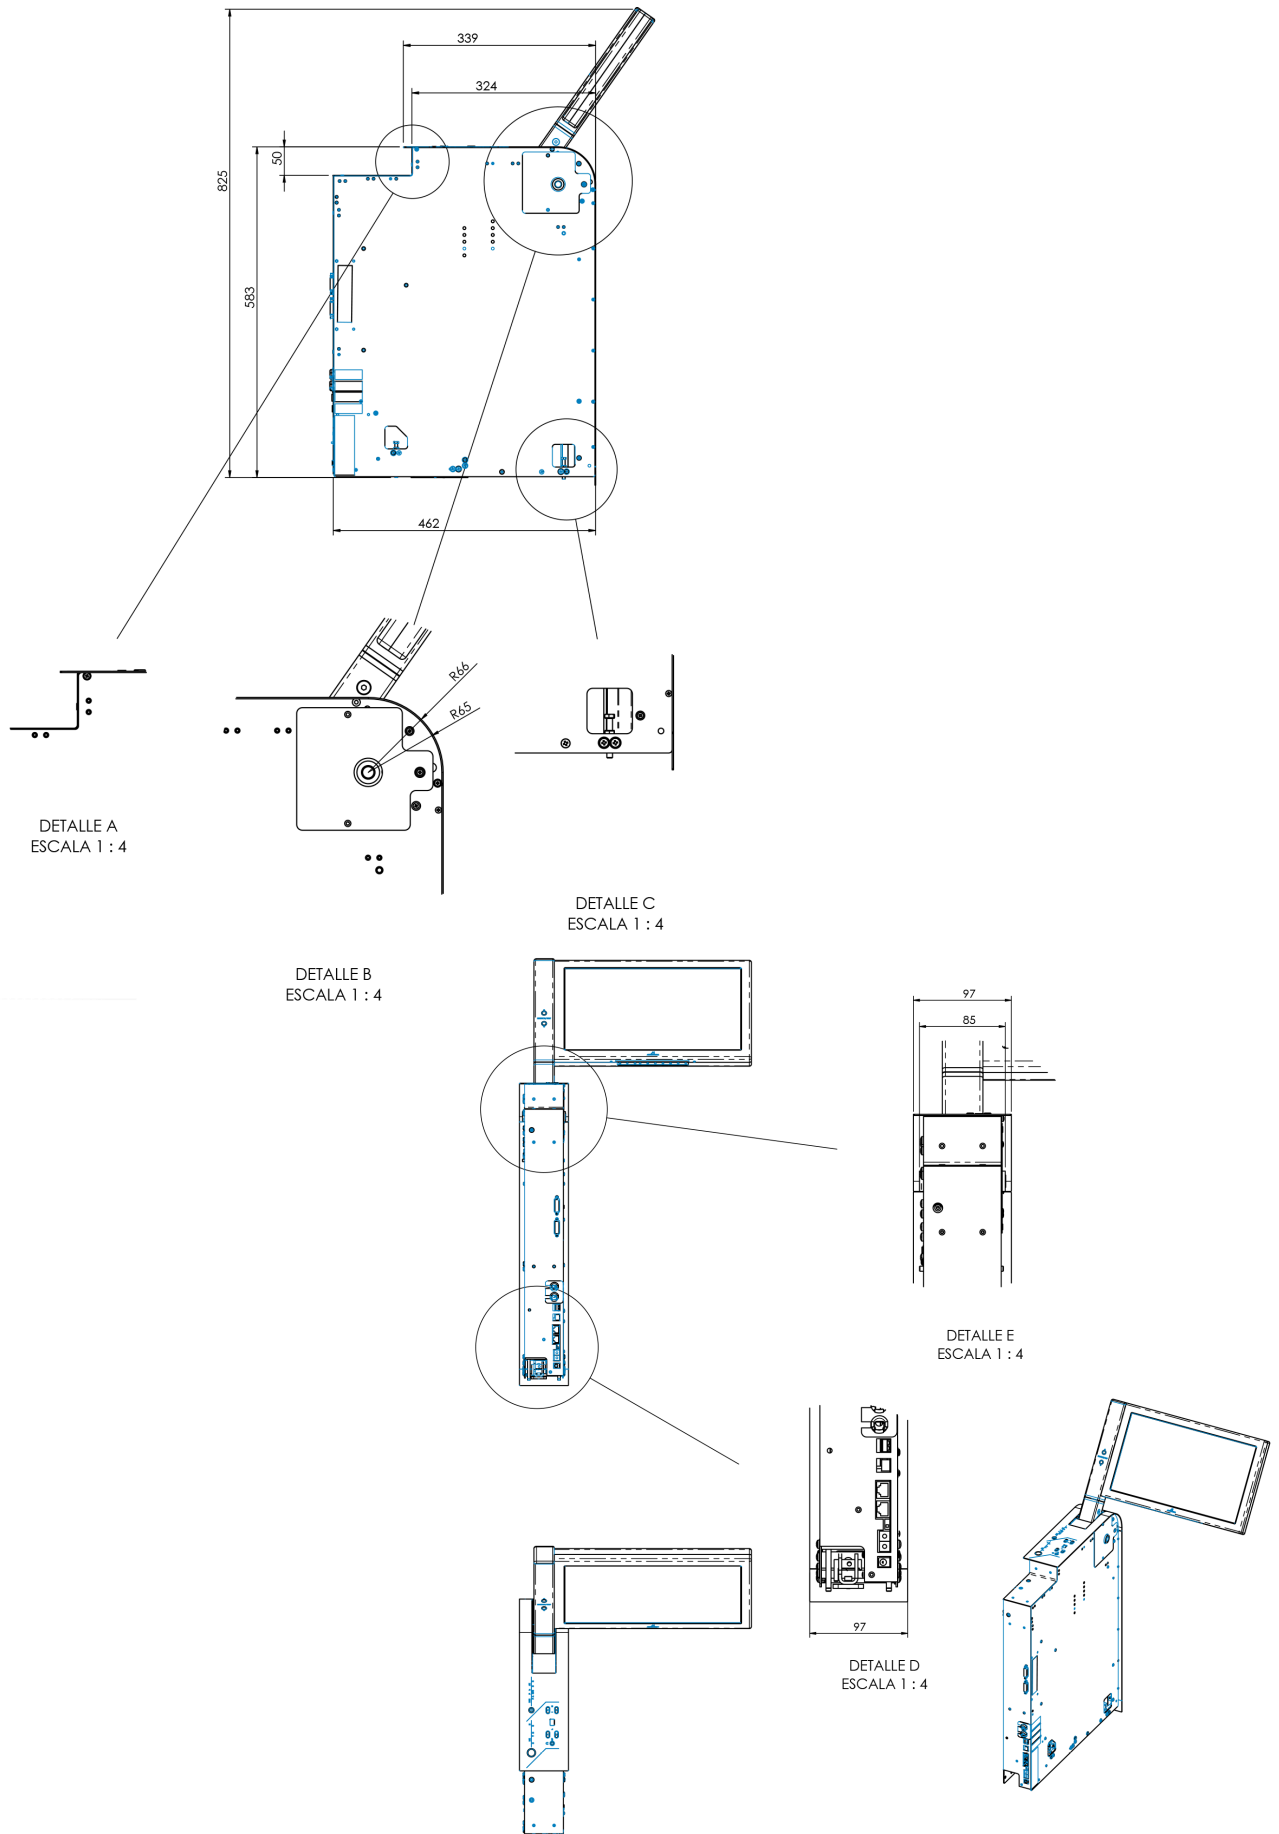

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design