


DynamicChairDisplay

HDCP compliant aluminium motorised monitor for armrest integration

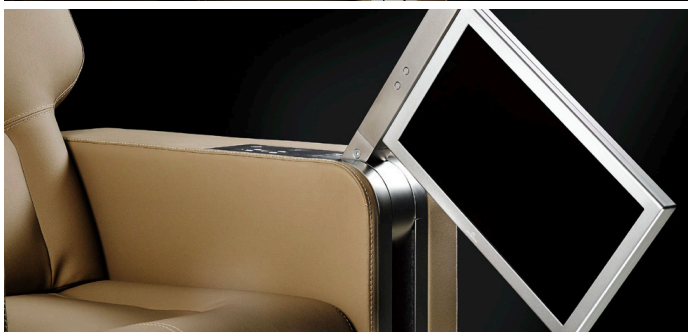

FEATURES

- Adapts to multiple armrests
- Motorised adjustable angle
- Panic functionality
- Interactive Setup Display (ISD)
- Maintenance free
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Wireless connectivity for setup and control
- Individual monitor addressing
- Auto Mechanical Movement Calibration (AH-AMMC)

GENERAL

Arthur Holm DynamicChairDisplay is a retractable motorised monitor to be integrated in chair armrests. The monitor is only visible when it is in use and it is safely stored in the armrest when not needed. This elegant aluminium screen possesses an automatic vertical extraction movement plus an additional manual rotation towards the user followed by a motorised tilt adjustment. The monitor housing is made of milled aluminium with anodised finish. Its mechanism is robust and silent and the whole solution is integrated in a compact block, being very simple to install.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

Display

Size	FULL HD 15.6" TFT Active Matrix, widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m2
Contrast ratio	1500:1
Pixel	0.17925 (h) x 0.17925 (v) mm
Viewing angle	85°/85° (u/d) / 85°/85° (l/r)
Viewing area	344.16 (h) x 193.59 (v) mm
LED backlight lifespan	70,000 hrs
Response time	Tr + Tf 35 ms
Temperature (operating/storage)	Operating 0°C ~+40°C Storage -20°C ~+60°C

Materials

Monitor housing	Anodised Aluminium
-----------------	--------------------

Connectivity

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol
GPI (SubD9)	Up/Down control
USB	For service

Control

RJ45, RS-422 (I/O), AHNet protocol
Addressing
Termination switch
GPI

Movement's Control

User interface on monitor	(Up/Down)
Remote	RS-422 I/O, GPI

Electrical

External power supply	100-240 Vac, 47/63Hz, 12Vdc
Power consumption	50W

Mechanical

Monitor Dimensions:	
Weight	16 Kg / 35.2 Lbs
Shipping Dimensions:	
Weight	17 Kg / 37.4 Lbs
Shipping Box	740 x 610 x 175 mm [29.13" x 24.01" x 6.88"]

OPTIONS


- Projected capacitive multi-touch screen
- USB Power
- Synchronised mic

WARRANTY

- 5 years limited warranty
- 2 years general warranty

CERTIFICATIONS

- CE
- FCC
- IECCE



CONNECTIVITY

- 1- AHnet control interface
- 2- Power input
- 3- DVI-D video input - digital
- 4- DVI-I video input - analog/ digital


CONSULTANTS, ARCHITECTS AND ENGINEERS SPECIFICATIONS

The aluminum monitor shall provide a motorised lifting and angle adjustment with a single electrical engine. The monitor shall provide a manual horizontal adjustment (rotation towards the user) for the user’s safety.

The monitor housing shall be made of milled anodised aluminium and shall have a brightness of 400 cd/m2, a contrast ratio of 1500:1 and a backlight lifespan of 70,000 hours.

The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP monitor manufacturer. The monitor shall provide an addressable

RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speeds and the control of the brightness, contrast and backlight. The monitor shall be able to run an autoadjustment program to reset the factory setups. The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS app providing information about the monitor’s serial number, and providing access to the control and to the setup menu.

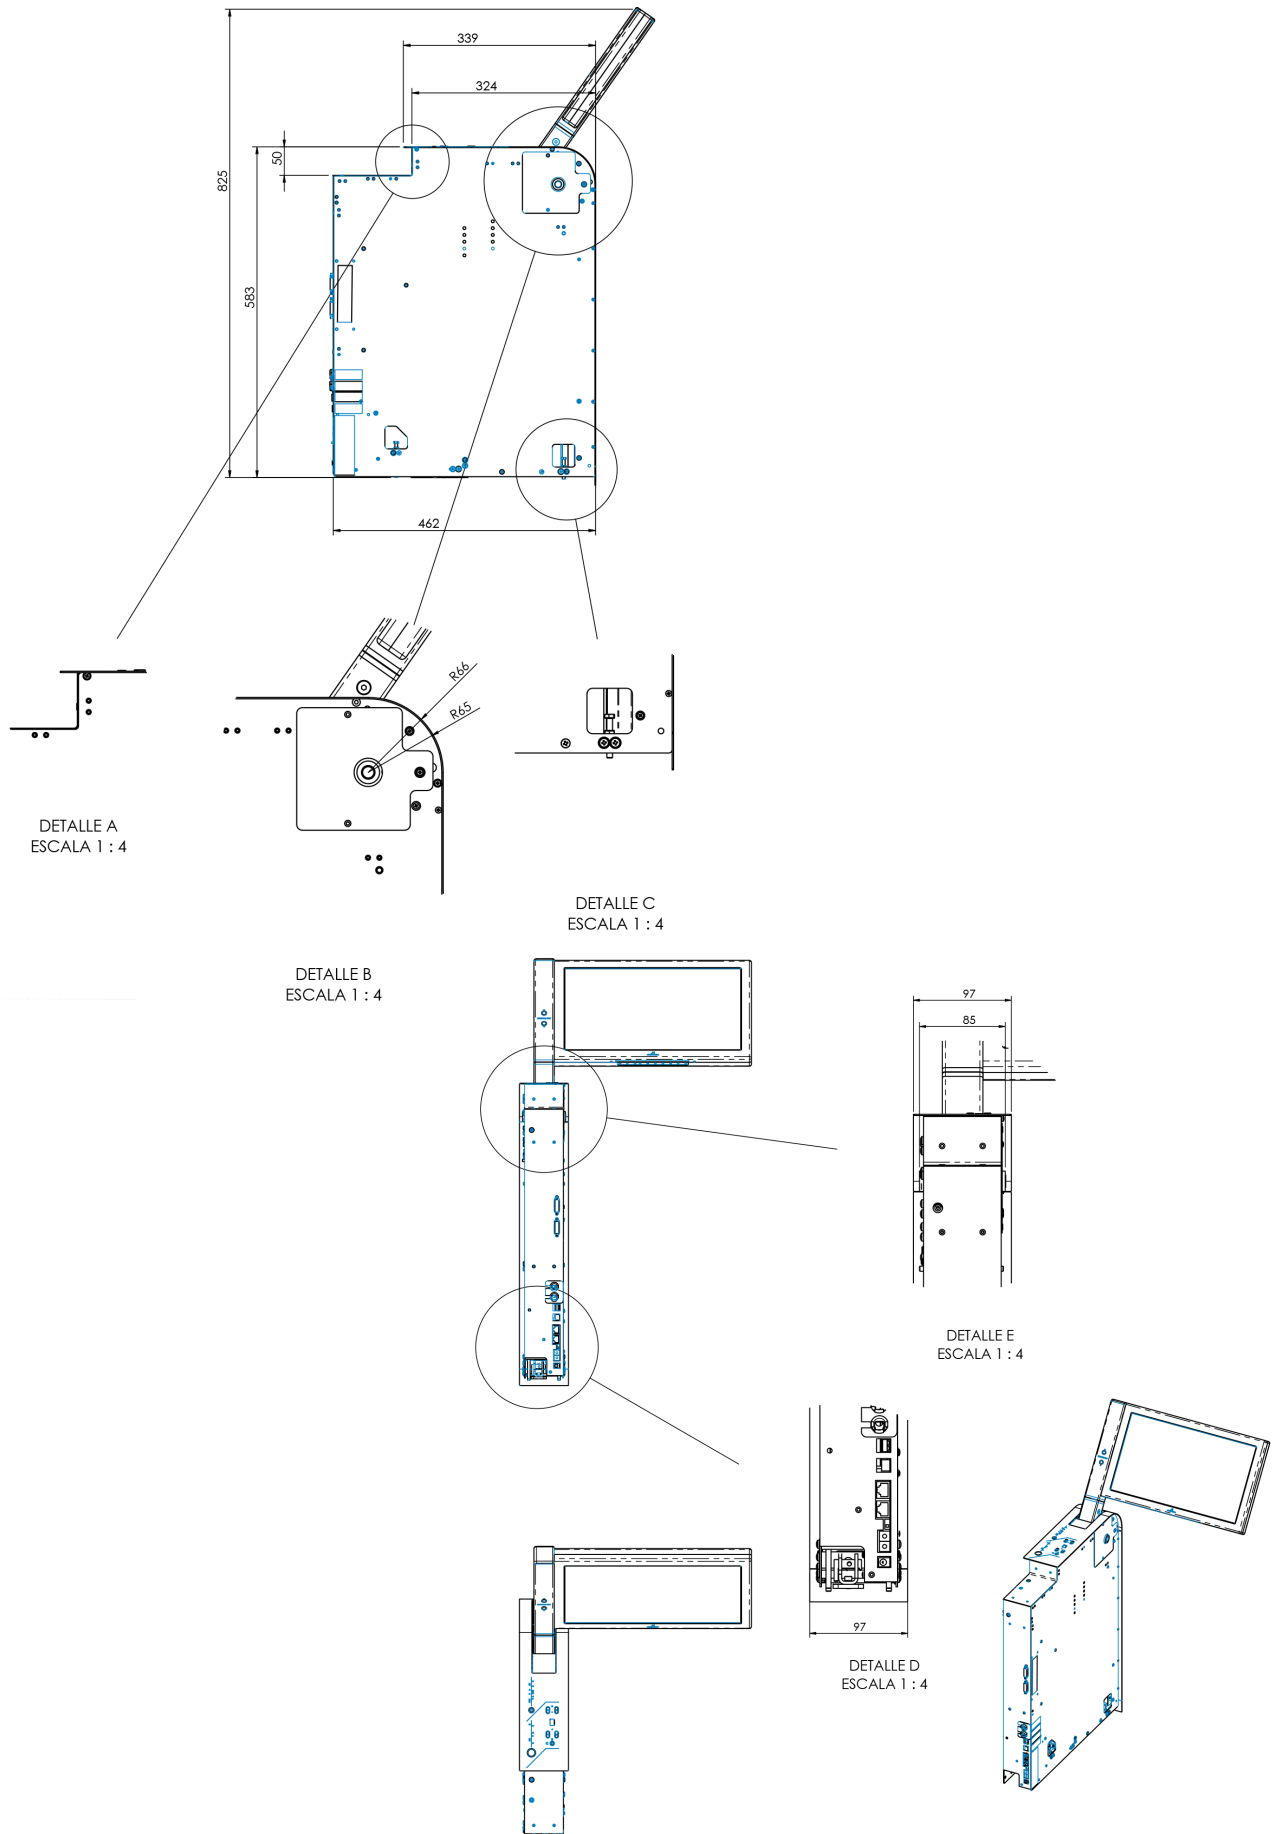

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design