


DynamicTalkB

Motorised microphone lift system for boundary microphones

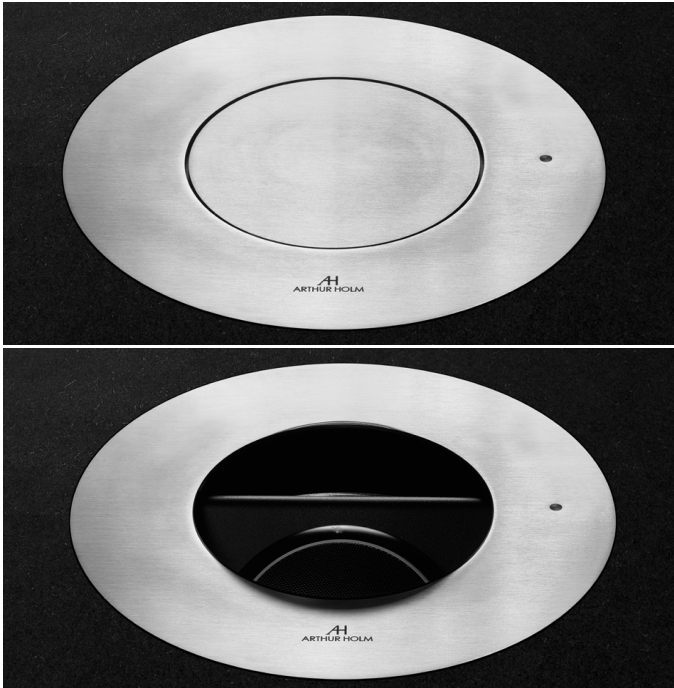

FEATURES

- Motorised lift for boundary microphones
- Compact, space optimising and stylish solution
- Touch sensor on cover plate
- Maintenance free
- Wireless connectivity for setup and control

GENERAL

Motorised microphone lift for boundary microphones and similar, controllable through AHnet or directly on the device using the flush mounted touch control sensor.

The Arthur Holm DynamicTalkB microphone lift is designed to hide boundary microphones when not in use with a smooth, elegant and silent movement.

Integrated wireless set-up and diagnosis.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

Engine

Housing	Brushed stainless steel or black matt finish
	Button on upper cover plate

Connectivity

RS422-AHNET
USB Port for FW update

Engine

Control Up/Down
RJ45 CAT6 RS422-AHNET

Electrical

External power supply	100-240 Vac,
Power consumption	30W

Mechanical

Case Dimensions:	
Upper cover plate	Ø 264 x 3 mm [10.39" x 0.11"]
Housing below the table	Ø 251 x 214,50 mm [9.88" x 8.44"]
Weight	8 Kg / 17.63Lbs
Shipping Dimensions:	
Weight	8.5 Kg/ 18.73 Lbs
Shipping Box	365 x 365 x 370 mm [14.37" x 14.37" x 14.57"]

OPTIONS

- Underneath installation
- Painted


CERTIFICATIONS

- CE
- FCC

WARRANTY

- 2 years general warranty

CONNECTIVITY PANEL

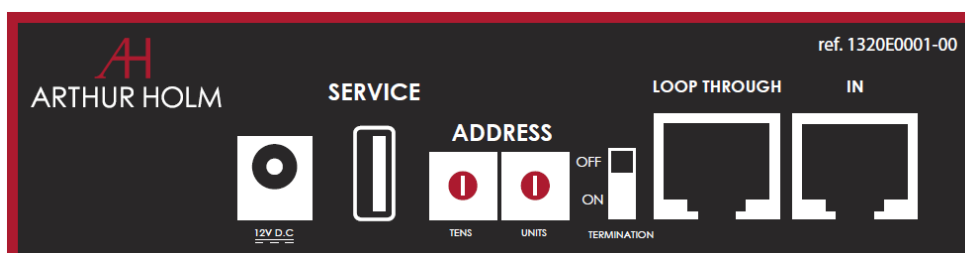


CONSULTANTS, ARCHITECTS AND ENGINEERS SPECIFICATIONS

The motorised lift system shall lift and retract boundary microphones. The cover plate shall be made of stainless steel. The device shall be activated by a flush mounted control capacitive sensor or via network. The lift shall provide commands for automatic mute of the microphone when moving and when in storage position.




The unit shall be compatible with a wireless app that allows its setup and control.



Motorised microphone lift system for boundary microphones

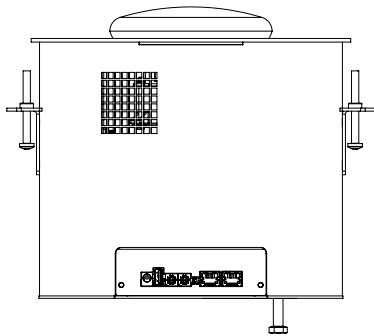

VIEW C
180,00°

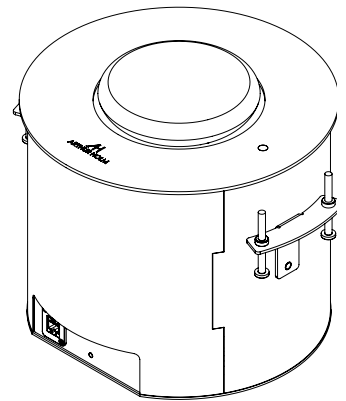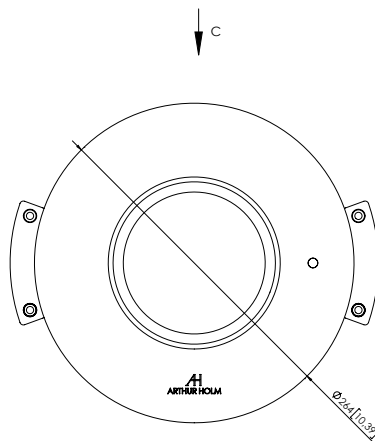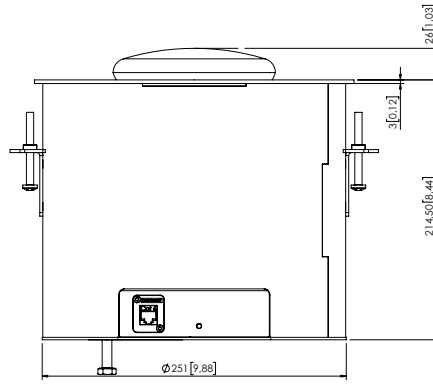

GENERAL DIMENSIONS
Scale: 1:3
Dimensions in millimeters [inches]
Revision: 0
Projection:
Structure: 1320GD000