
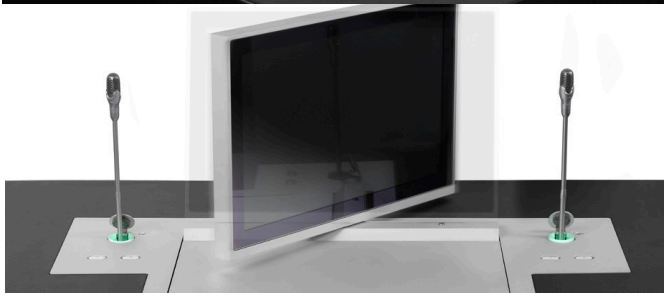


Dynamic3Talk

HDCP compliant aluminum foldable and rotatable monitor with integrated independent microphone lift system

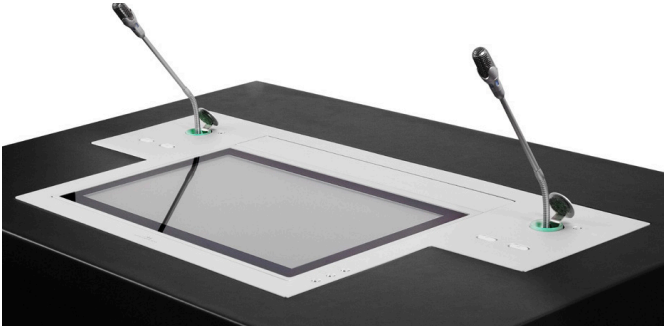

This picture corresponds to a customized version of Dynamic3Talk

| Arthur Holm | |
|-------------------------|------------|
| Dynamic3 (577FW203) | |
| Serial: 0000000000 | |
| Ver: 1.18 | |
| Control | |
| MOV | OPEN CLOSE |
| DISP | ON OFF |
| DVIA | DVI1 DVI2 |
| BACKL | ... |
| CONTR | 50 |
| BRIGH | 50 |
| SAVE VALUES AHLink OFF | |
| Command: 00:00:00:00:00 | |
| S1 | S2 S3 S4 |
| AHnet Address 1 | |
| Position 8 | |
| PASSWORD: 0 | |

| Arthur Holm | |
|-------------------------|--------------------|
| DynamicTalk | |
| Serial: 0000000000 | |
| Ver: 5.0 | |
| BEEP | BT OFF AUTO ADJUST |
| Control | |
| MOV | UP DOWN |
| MIC | TALK MUTE |
| RED | GREEN OFF |
| Command: 00:00:00:00:00 | |
| S1 | S2 S3 S4 S5 |
| Position 100 | |
| Configuration | |
| AHnet Address 1 | |
| MIC_Lenght 60 | |
| TERM OFF | |
| MODE CONF | |
| PASSWORD: 0 | |

Highlights

- Aluminum retractable monitor with an independent microphone lift
- Opens, folds down and rotates 180°
- 2 working positions (vertical and horizontal)
- Adjustable and memorizable tilt angle from 90 to 110°
- Automatic image flip
- Synchronized tray lift movement
- Floating security sensor
- Energy saving design, low consumption video controller
- 360° LED lighting ring to indicate microphone status
- 2 DVI I/HDCP compliant
- RS422/RS485 I/O
- ISD: Interactive Setup Display for adjustments and service
- AHlink: Wireless connectivity for setup, adjustments and service
- AH-AMMC: Auto Mechanical Movement Calibration

General

Arthur Holm Dynamic3Talk is a motorized foldable and rotatable product range that includes an independent lift for gooseneck microphones. The aluminum monitor rises and leans, has an additional 180 ° rotation movement, and retracts inside the work surface in 2 different positions: with the monitor oriented up or down. The screen's lifting system automatically activates the elevation of a tray where keyboard and mouse can be placed. The aluminum cover plate has been enlarged to include an independent lift system for microphone with a rounded microphone coverlid that not only makes the microphone disappear within the desk surface, but it also provides a pleasant light to indicate its status. Thanks to its protective and patented lighting ring, the microphones can be safely stored and protected making meeting and conference spaces more flexible and versatile. This system provides two different working modes: PA and Conference. When in PA mode, a push button placed on the stainless steel cover plate allows to activate or de-activate the microphone and the LED ring will indicate the status by changing colour from red to green.

The system will automatically silence the microphone when retracting. When in conference mode, the microphone will be always active and both, the light ring and the access to the push button on the cover plate, will be available via GPI and GPO for remote control. The microphone lift can be adjusted to the exact length of the microphone via AHnet and AHlink. The AHlink is an excellent tool to diagnose, verify and configure Dynamic3 and DynamicTalk. The monitor is equipped with an Interactive Setup Display (ISD) allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with an Auto Mechanical Calibration Movement System (AH-AMMC). The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The app AHlink Android and iOS allows getting the unit's serial number without the need to have access to the unit from below the table.

Technical Specifications

Display

| | |
|---------------------------------|---|
| Size | FULL HD 18.5" TFT Active Matrix, widescreen format. LED backlight |
| Resolution | 1920 (h) x 1080 (v) |
| Brightness | 400 cd/m2 |
| Contrast ratio | 1500:1 |
| Pixel | 0.213 (h) x 0.213 (v) mm |
| Viewing angle | 85°/85°(u/d) 85°/85°(l/r) |
| Viewing area | 408.96 (h) x 230.04 (v) mm |
| LED backlight lifespan | 50,000 hrs |
| Response time | Tr + Tf 37=35ms |
| Temperature (operating/storage) | Operating 0°C ~ +40°C Storage -20°C ~ +60°C |

Materials

| | |
|-----------------|---|
| Monitor housing | Anodized Aluminum |
| Glass | AR 2-side with an anti-reflective coating on the glass surface. Thickness: 3.0 ± 0.3 mm |
| Cover plate | Anodized aluminum |

Connectivity

| | |
|-----------------------|---|
| Input signal | DVI-I (1 input) – HDCP Compliant – Digital / Analog DVI-D (1 input) – HDCP Compliant – Digital |
| RJ45 CAT6 (with loop) | Addressable RS422 monitor control by AHnet protocol |
| GPI (SubD9) | Up/Down control |
| USB | For service |

DynamicTalk Control

| | |
|---------------------|--|
| Up/Down Control | Button on upper cover plate GPI contact closer RS-422 (RJ45 CAT 6) |
| Microphone control | Button on upper cover plate |
| Customized function | Button on upper cover plate |
| GPI/O | LEDs control and switch |

Movement's Control

| | |
|---------------------------|----------------------------------|
| User interface on monitor | (Up/Down) Buttons on cover plate |
| Remote | RS-422 I/O, GPI |

Electrical

| | |
|-----------------------|-----------------------------|
| External power supply | 100-240 Vac, 47/63Hz, 12Vdc |
| Consumption | 65W |

Accessories

| | |
|-----------------|-------------------------|
| ERT-30 / ERT-60 | Ethernet Interface Unit |
|-----------------|-------------------------|

Mechanical

| | |
|-------------------------|---|
| Dimensions: | |
| Upper cover plate | 542 x 435 x 4.1 mm [25.19" x 3.74" x 0.16"] |
| Housing below the table | 527 x 413.70 x 102.45 mm [24.6" x 23.7" x 3.15"] |
| Weight | 22,5 Kg / 49.6 Lbs |
| Shipping Dimensions: | |
| Weight | 23.5 Kg / 51.8 Lbs |
| Shipping Box | 672 x 717 x 207 mm [26.45" x 28.22" x 8.14"] |

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

Options

- Projected capacitive multi-touch screen
- Built-in DynamicTalk
- Integrated USB camera
- Integrated connectors on cover plate
- Retractable HDMI cable
- Keyboard and mouse
- DynamicLoop
- DynamicShare
- Synchronized microphone

Finishes

- Laser engraved logo
- Underneath installation
- Black anodized
- Gold
- Bronze
- Painted

Certifications

- CE
- FCC
- IECEE
- CB

Warranty


- 2 years general warranty



ARTHUR HOLM


Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

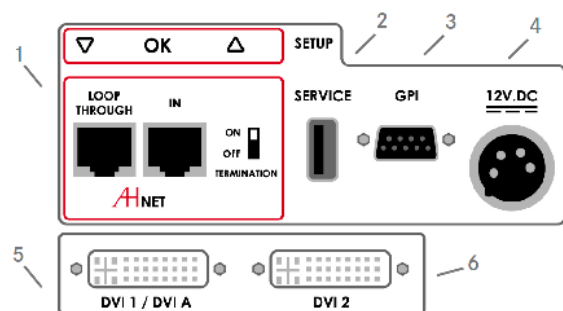

Connectivity


- 1- AHnet control interface
- 2- USB for Service
- 3- GPI control
- 4- Power input
- 5- DVI 1 / DVI A video input
- 6- DVI 2 video input

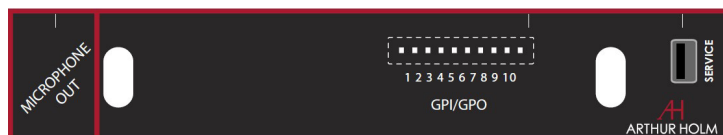

DynamicTalk Connectivity

- 1- Microphone output
- 2- Power input
- 3- GPI control
- 4- DynamicTalk configuration settings
- 5- AHnet control interface

Interactive Setup Display (ISD)

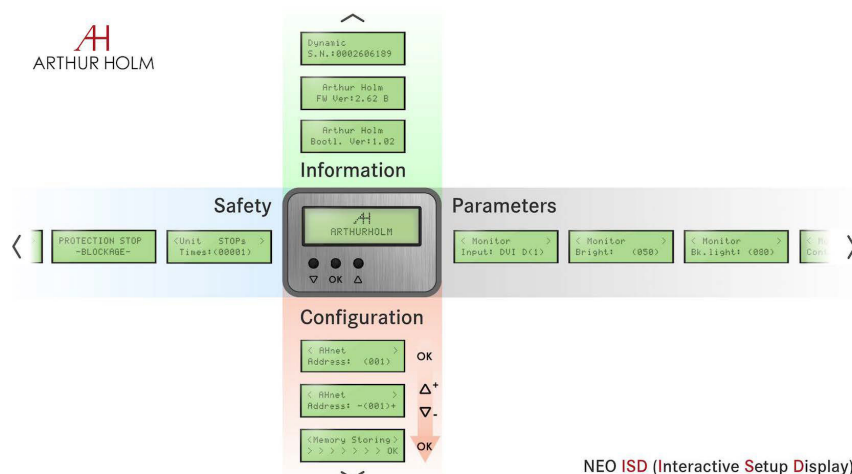

NEO ISD (Interactive Setup Display)

Consultants, architects and engineers specifications


Motorized foldable and rotatable 17,3" professional monitor. The monitor housing shall be made of milled anodized aluminum and the screen shall be protected with anti-reflective 2 side coating black edged 3 mm glass. The monitor shall have a brightness of 400 cd/m², a contrast ratio of 600:1 and a backlight lifespan of 50,000 hours. The monitor's opening mechanism shall activate automatically the rising of a synchronized aluminum tray covering the entire opening surface. The monitor shall provide 2 working positions: vertical with an adjustable tilt angle of up to 20 ° and horizontal flush on the table. The monitor shall be capable to rotate 180 ° and to be folded with the screen facing down. The monitor shall provide an automated image adaptation for vertical and horizontal monitor position. The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP monitor manufacturer. The monitor shall provide an addressable RS- 422 and an easy to read interactive setup display (ISD) to access the safety parameters, the setup of the speeds and the control of the brightness, contract and backlight and remote setup support and diagnostic. The monitor shall provide a dual safety system that detects obstructions causing the unit to stop through a flotating security sensor. The monitor shall be able to run an auto-adjustment program to reset the factory security ratio between its factory movement speed and its protection parameters adapting the unit to the way it has been

installed. The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS app providing information about the monitor's serial number, and providing access to the control and to the setup menu. The system shall include an independent lift system for 3 pin XLR gooseneck microphones in the cover plate. This cover plate shall provide a rounded microphone coverlid and 3 operation buttons; open/close, mute/unmute the microphone and free GPO button. The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a top position projected through the cover, avoiding the microphone from touching the cover plate, damaging or blocking when retracting. This ring shall provide a programmable green and red LED to indicate the microphone status and shall be visible 360°. The system shall provide a safety system that detects obstructions and causes the unit to stop with an audio indication. The unit shall provide and auto-calibration mode to reset mechanical speeds and safety adjustments. The unit shall be compatible with a wireless app that allows the exact adjustment of the microphone length, facilitates the unit's serial number, allows the activation and de-activation of the RS-422 termination and allows to change the working mode from PA to Conference.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

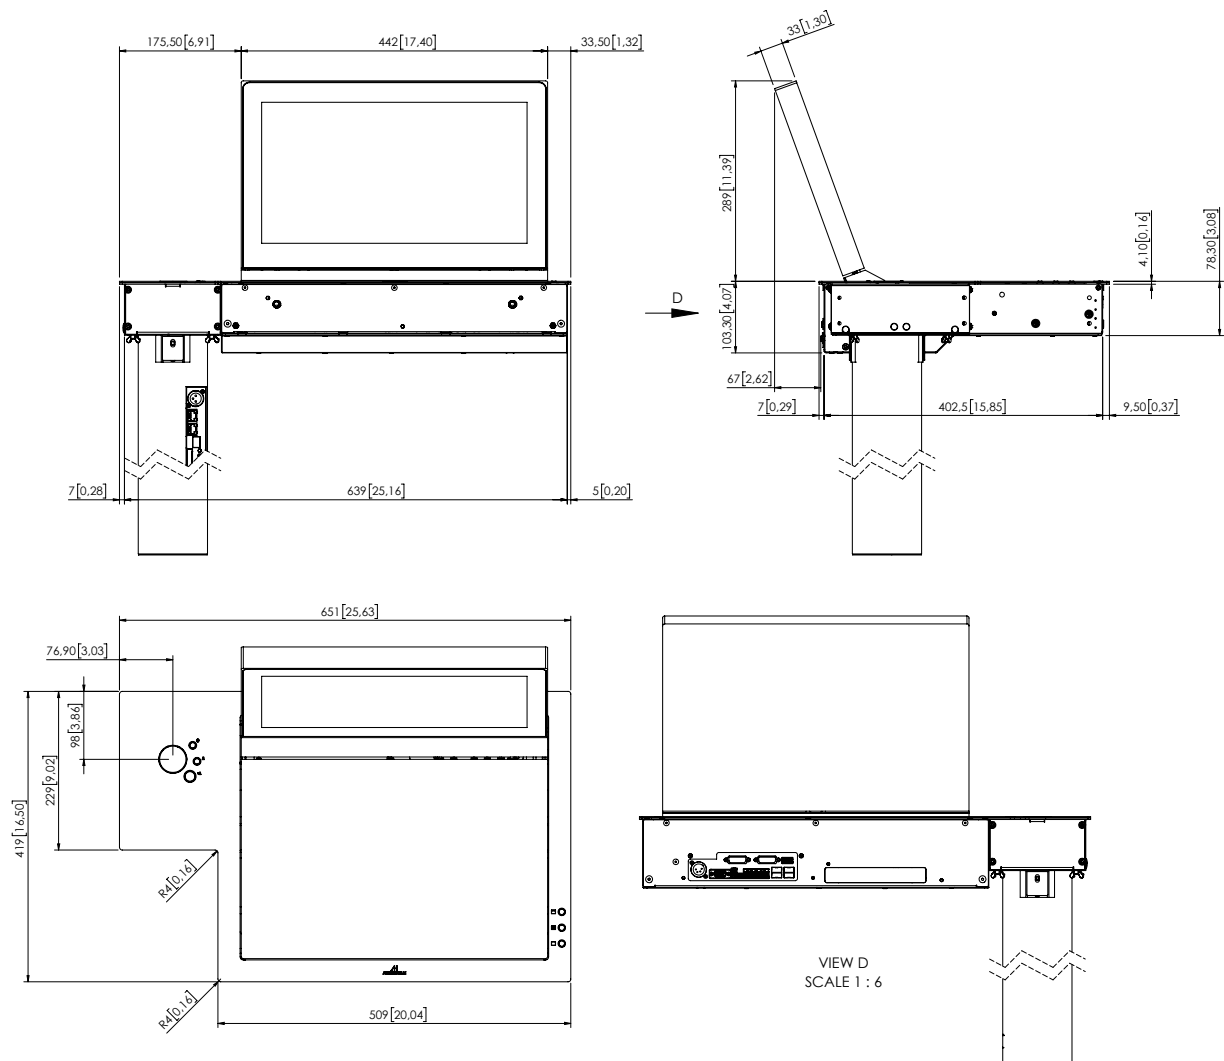

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design