

AH₁

HDCP compliant aluminum manually foldable monitor





Features

- Milled anodized aluminum monitor
- Manually foldable from 0 to 70°
- Totally adjustable position
- No need to modify the desk surface

- USB pass-through
- Maintenance free
- Energy saving design, low consumption video controller

General

Arthur Holm AH1 are aluminum manually foldable monitors for table top with a natural anodized finish and a black iron base. The multifunctional iron base serves for several purposes: the unobstructed base holds firmly the aluminum monitor housing in place and provides a steepless adjustment of the viewing area. Furthermore, the base hides the cable connection and guides the cables unseen away from the monitor when using the cable exit in the centre of the base or, if needed, the rear cable outlet.

The screen position can be easily adjusted from flat on the table to 70° . The monitors include a USB passthrough from the side. AH1 are the ideal solution for auditoriums, telepresence, training rooms, meeting and conference rooms and information counters.

Dis	plav

Display	
Size	Full HD 21.5" TFT Active Matrix, widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	350 cd/m2
Contrast ratio	1000:1
Pixel	0.24975 (h) x 0.24975 (v) mm
Viewing angle	89°/89° (L/R)/89°/89°(U/D)
Viewing area	476.064 (h) x 267.786 (v)
LED backlight lifespan	50,000 hrs
Response time	Tr 12ms, Tf 10 ms
Temperature (operating/storage)	Operating 0°C ~+40°C Storage -20°C ~+60°C
Materials	
Monitor housing	Milled aluminium with anodized finishing and dark grey iron base
Glass	Flush antiglare protection glass with elegant black marking

Connectivity	
Input signal	DVI-I (1 input) - HDCP Compliant DVI-D (1 input) - HDCP Compliant
Electrical	
External power supply	100-240 Vac, 47/63Hz, 12Vdc
Power consumption	60W
Mechanical	
Monitor Dimensions:	
Monitor Dimensions	538.8 x 381.6 x 57 mm [21.21" x 15.02" x 2.24"]
Weight	20 Kg / 44.09 Lbs
Shipping Dimensions:	
Weight	21.1 Kg / 46.8 Lbs
Shipping Box	700 x 560 x 225 mm
	[27.55" x 22.04" x 8.85"]


Options

- Laser engraved logo
- Projected capacitive multi-touch screen
- Black anodized
- Gold finish
- Bronze finish

Certifications

- CE
- FCC
- IECEE

Connectivity Panel

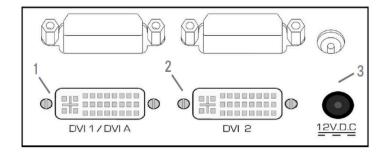

Consultants, architects and engineers specifications

The monitor shall provide a manually adjustable position from 0 to 70°. The monitor housing shall be made of anodized aluminium with a double sided anti-reflective 3 mm front glass with black marking. The monitor shall provide a black iron base with hidden cables and no visible screws.

The 21.5" Full HD monitor shall have a brightness of 350 cd/m2, a contrast ratio of 1000:1 and a backlight lifespan of 50,000 hours. The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP manufacturer and a USB pass-through.


Warranty


• 2 years general warranty

CONNECTIVITY

- 1- DVI-1 /DVI-A video input analog /digital
- 2- DVI-2 video input digital
- 3-12 D.C. power supply input

General Dimensions AH22TX16GA

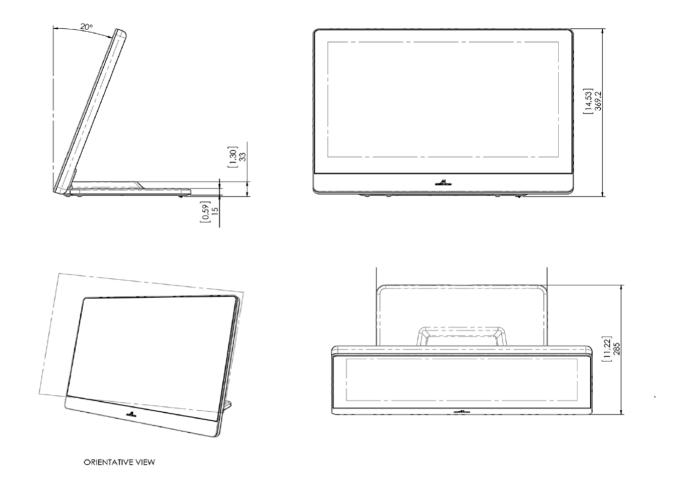

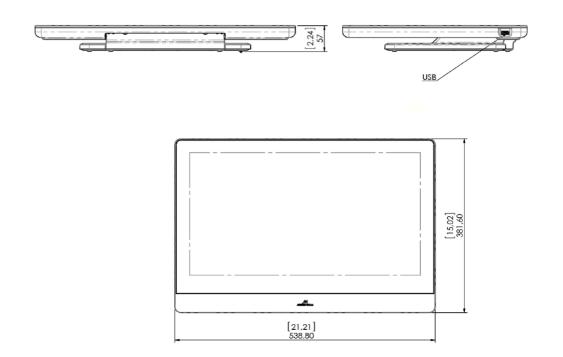

ARTHUR HOLM