

DynamicCL

Motorized camera lift for Neat Center

(Camera not included)



Highlights

- Motorized lift for 360° camera Neat Center
- Integrated camera power and cable for laptop connectivity
- RS422 for remote control
- Brushed stainless steel cover plate




General

The DynamicCL is a motorized camera lift system for Neat Center that has been designed to hide table cameras when not in use. Table cameras often cover all the people at the table and are therefore located in a central position on the table.

The up and down movement can be controlled remotely via RS422 or locally on the device.

The DynamicCL has the well-known Arthur Holm build quality with a smooth and almost silent movement of the camera. It has a brushed stainless steel cover plate with a capacitive touch button to control the up and down motion.

Connectivity AHDCL N

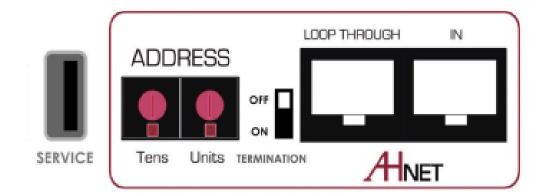

Technical Specifications

Materials	
Brushed stainless steel, Steel, Aluminium, Nylon	
Finishing Materials	
Cover plate in brushed stainless steel / option mat black , white	
Black housing	
Connectivity	
USB Port for software update	
XLR-4 input power	

Motor Control	
Control Up/Down	Capacitive touch control sensor on cover plate
RJ45 CAT6	Addressable RS422 control by AHnet protocol
Electrical	
External power supply	100-240 Vac, 50/60Hz. 24VdC
Power consumption	90W
Dimensions	
Upper cover plate	Ø 228 x 3 mm [8.98" x 0.12"]
Housing below the table	514.50 x 174 mm x 152 mm [20.26" x 6.85" x 5.98]

Certifications

- CE
- FCC


Consultants, architects and engineers specifications


The motorized camera lift system shall retract the camera when not in use.

The movements of the motorized camera lift shall be controlled remotely via RS422 or locally on the device.

The lift shall provide a brushed stainless steel cover plate with a capacitive touch button to control the up and down motion.


General Dimensions AHDCL N

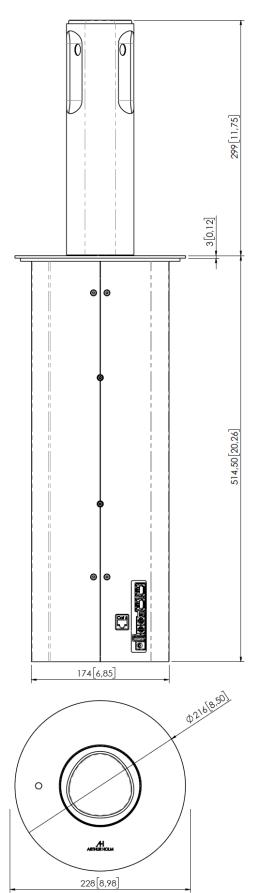

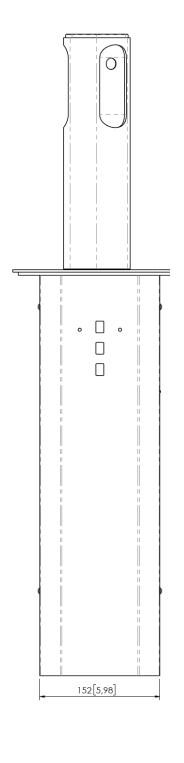



General Dimensions AHDCL N

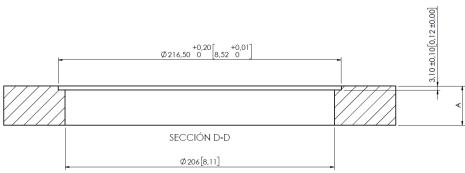

A= FROM 11 [0,43] TO 75 [2,95]

