


## AH2

Professional HDCP compliant aluminum manually foldable monitor



### Highlights

- Professional manually foldable monitor
- Milled anodized aluminum housing
- Manually foldable from 0° to 110°
- Stepless viewing position
- Double-sided anti-reflective glass
- Auto-Stand-By / Automatic Shut-Off when closed
- Easy to install
- Limited space is required under the table surface
- Maintenance free
- Energy saving design, low consumption video controller



## General

Arthur Holm AH2 manually foldable professional monitors are the perfect solution to create a flexible and versatile meeting environment when the space is limited. The monitor is fixed to the table surface through its milled aluminum base, allowing the user to adjust the viewing angle of the monitor and holding the monitor in a firm viewing position. All connectors are placed under the table and cables are passed unseen through the base to the monitor, leaving the monitor minimalistic design unobstructed.

AH2 are aluminum monitors that can be easily folded down to leave a direct line of sight to the other participants and give space for other activities taking place in the room. Furthermore, the low profile space needed for their installation allows users to have a large cable-free surface to work using both the screen and other materials over the desk.

## Technical Specifications

### Display

Size	FULL HD 21.5" TFT Active Matrix, widescreen format.
Resolution	1920 (h) x 1080 (v)
Brightness	500cd/m2
Contrast ratio	1000:1
Pixel	0.24795 (h) x 0.24795 (v) mm
Viewing angle	89°/ 89° (u/d) 89°/ 89° (l/r)
Viewing area	476.064 (h) x 267.786 (v) mm
Response time	Tr 12ms, Tf 10ms
Temperature	Operating 0° ~ +40°C Storage -20° ~ +60°C

### Materials

Monitor housing	Milled aluminum with anodized finishing
Glass	Anti-reflective 2-side coating 3mm black edged glass

### Connectivity

Input signal	HDMI (1 input) HDCP compliant
--------------	-------------------------------

### Electrical

External power supply	100-240Vac, 50/60Hz, 12Vdc
Power consumption	65W

### Mechanical Dimensions

subject to change without previous notice

Monitor	518 x 369.25 x 23mm [20.39" x 14.54" x 0.91"]
---------	--

## Control Panel



## Options

- Projected capacitive multi-touch screen

## Certifications

- CE
- FCC
- IECEE
- CB

## Warranty

- 2 years general warranty


## Consultants, architects and engineers specifications

The monitor shall provide a manually adjustable position from 0° to 110°. The monitor housing shall be made of anodized aluminum with an anti-reflective 2 sides coating 3 mm black edged glass. The monitor shall have one milled aluminum base, allowing the user to adjust the viewing area of the monitor and holding the monitor in a firm working position.


All connectors shall be placed under the table and cables shall be unseen through the base to the monitor. The 21.5" Full HD monitor shall have a brightness of 500cd/m2, and a contrast ratio of 1000:1. The monitor shall provide 1 HDMI HDCP input by a licensed HDCP manufacturer.

General dimensions

AH22BTX16GA B

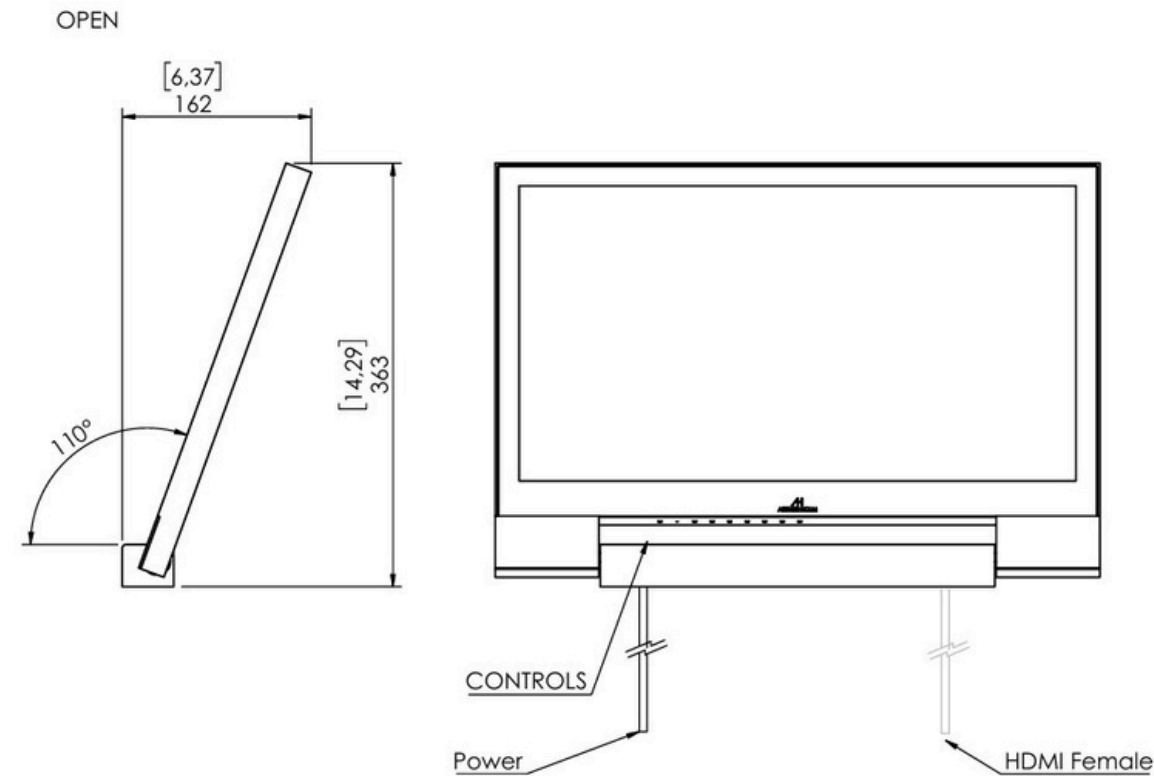

CLOSED

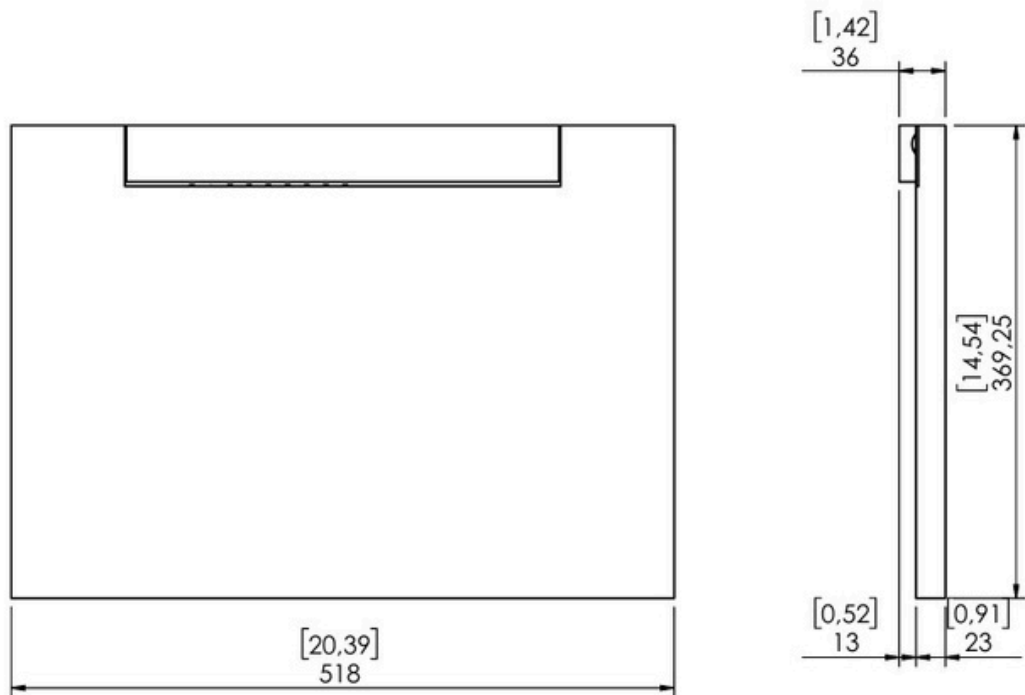

Dimensions subject to change without previous notice.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!