
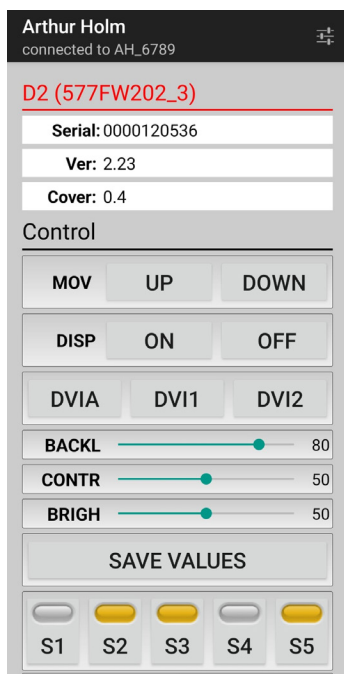
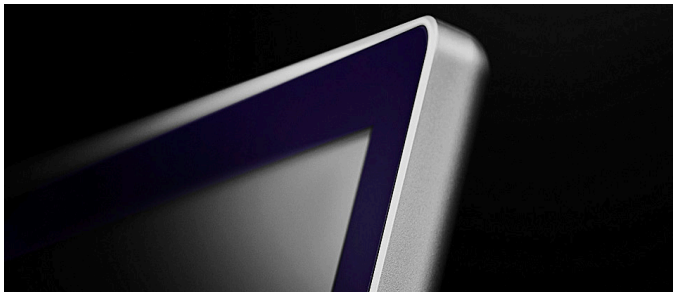


DynamicX2

HDCP compliant aluminum retractable motorized monitor



Highlights

- Vertical motorized monitor with up to 20° inclination
- Patented single engine mechanism for up/down and tilt movements
- Milled aluminum housing with a contemporary design
- Front anti-reflective 2-side coating 3mm black edged glass
- Stainless steel customizable cover plate
- Interactive Setup Display (ISD)
- Maintenance free
- HDCP compliant
- Energy saving design, low consumption video controller
- Compatible wireless connectivity for setup and control via AHlink
- Auto mechanical Movement Calibration (AH-AMMC)

AHlink : the App for setup, control and diagnose



ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

General

Arthur Holm DynamicX2 is a motorized retractable product range that provides silent, reliable and harmonic movements by the use of a patented solution with one only engine. This automatic system is equipped with a variable speed system to raise, lower and tilt 20° to ensure the best ergonomics, viewing angle and visibility. We have selected the best possible aluminum finishing specifications in the world, providing the maximum technical and visual performance. DynamicX2 have slightly curved edges for a contemporary and longstanding look and the screen is protected with an anti-reflective 2 side coating 3 mm black edged glass.

DynamicX2 are available from 15.6" to 23.8", with 2 DVI or HDMI HDCP compliant inputs and equipped with an Interactive Setup Display allowing the control, setup and diagnose of the monitors. Monitors provide RS-422/RS-485 Full Duplex I/O allowing the remote control of movements, speed, safety settings, brightness, contrast and backlight.

The monitors are equipped with an Auto Mechanical Calibration Movement System (AH-AMMC). The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The monitor is compatible with AHlink Android and iOS app which allows access to the setup, diagnose and control menus.

Technical Specifications

Display

Size	4K 23.8" TFT Active Matrix, widescreen format. LED backlight
Resolution	3840 (h) x 2160 (v)
Brightness	250 cd/m2
Contrast ratio	1000:1
Pixel	0.045750 (h) x 0.13725 (v) mm
Viewing angle	178°(v) / 178°(h)
Viewing area	527.04 (h) x 296.46 (v) mm
Response time	Tg-g 14ms
Temperature (operating/storage)	Operating 0°C ~ +40°C Storage -20°C ~ +60°C

Materials

Monitor housing	Anodized Aluminum
Glass	AR 2-side with an anti-reflective coating on the glass surface. Thickness: 3.0 ± 0.3 mm
Cover plate	Stainless steel

Connectivity

Input signal	2 HDMI – HDCP Compliant
RJ45 CAT6 (I/O)	Addressable RS-422/RS-485 Full Duplex monitor control by AHnet protocol
GPI (SubD9)	Up/Down control (opto isolated)
USB	For service (firmware upgrades)

Control

RJ45, RS-422/RS-485 Full Duplex, AHnet protocol
Addressing
Termination switch
GPI
IR Remote control (monitor adjustments): 1 Remote control is provided every 5 motorized devices

Movement's Control

User interface on monitor	(Up/Down) Buttons on cover plate
Remote	RS-422/RS-485 Full Duplex, GPI
AHlink	

Electrical

External power supply	100-240 Vac, 50/60Hz, 12Vdc
Power consumption	60W

Accessories

ERT-30 / ERT-60	Ethernet Interface Unit
-----------------	-------------------------

Mechanical

Screen	560.30 x 334.32 x 25mm [22.06" x 13.16" x 0.98"]
Cover plate	657.50 x 95 x 3 mm [25.89" x 3.73" x 0.12"]
Housing below the table	642.50 x 80 x 640mm [25.30" x 3.15" x 25.20"]
Weight	26Kg / 57.32Lbs

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

Options and accessories

- DynamicLoop
- DynamicShare
- Built-in USB or HD-SDI camera
- DynamicTalk
- Synchronized microphone
- Projected capacitive multi-touch screen
- Connectors on the cover plate

Finishes

- Painted
- Laser engraved logo
- UnderCover for veneer
- Matte cover plate
- Underneath installation
- Black anodized
- Gold
- Bronze

Certifications

- CE
- FCC
- IECEE
- CB
- RoHs
- BIS

Warranty


- 2 years general warranty
- 5 years for the mechanical parts




ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

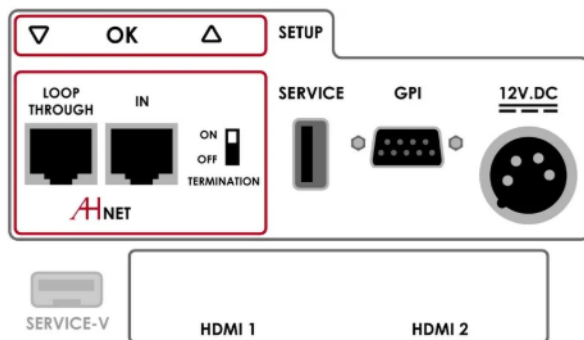

Interactive Setup Display (ISD)

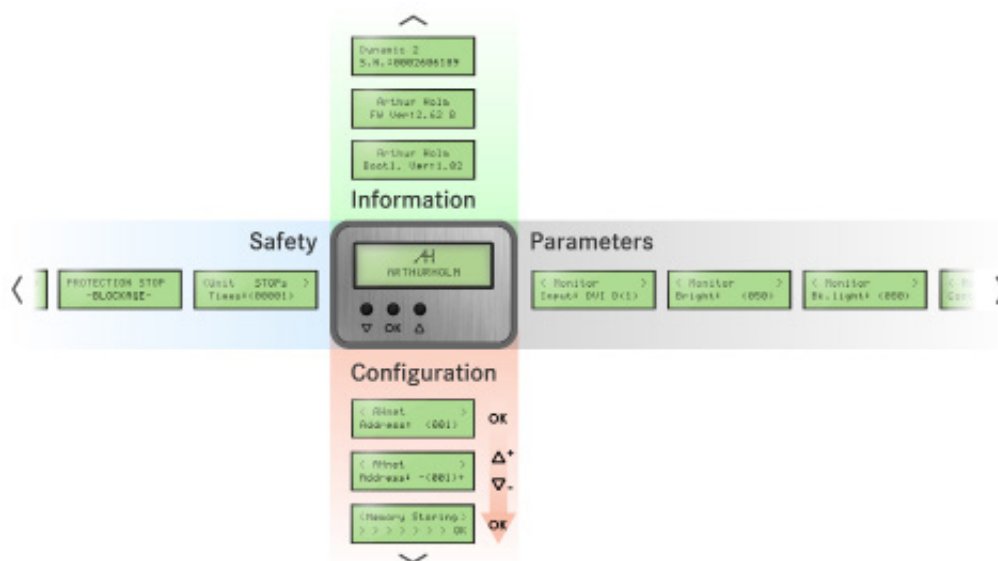

Consultants, architects and engineers specifications

Vertically retractable motorized 23.8" 4K professional monitor. The monitor shall provide 2 HDMI HDCP inputs by a licensed HDCP manufacturer. The monitor shall provide RS-422/RS-485 Full Duplex for the AHnet protocol and an Easy-to-Read Interactive Setup Display (ISD) for the setup, diagnose and control, and shall be compatible with ERT-30 and ERT-60. The monitor shall be able to run an auto-adjustment program to reset the factory security ratio between its factory movement speed and its protection parameters adapting the unit to the way it has been installed. The monitor shall provide a USB port for firmware upgrades. The monitor shall be compatible with the AHlink wireless Android and iOS App for the setup, diagnose and control. The monitor housing shall be made of milled anodized aluminum and the screen shall be protected with an anti-reflecting 2 side coated 3mm glass. The monitor shall make the up/down/tilt movements with only one engine.





The monitor cover plate shall provide a passive opening system and shall be made of 3mm brushed stainless steel. The monitor shall have a brightness of 250 cd/m2, and a contrast ratio of 1000:1.

The monitor shall provide 2 HDMI HDCP inputs by a licensed HDCP manufacturer. The monitor shall provide RS-422/RS-485 Full Duplex for the AHnet protocol and an Easy-to-Read Interactive Setup Display (ISD) for the setup, diagnose and control, and shall be compatible with ERT-30 and ERT-60. The monitor shall be able to run an auto-adjustment program to reset the factory security ratio between its factory movement speed and its protection parameters adapting the unit to the way it has been installed. The monitor shall provide a USB port for firmware upgrades. The monitor shall be compatible with the AHlink wireless Android and iOS App for the setup, diagnose and control.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

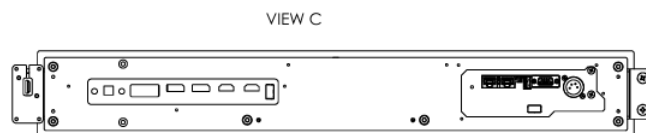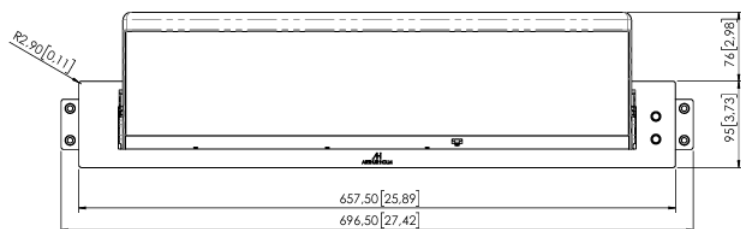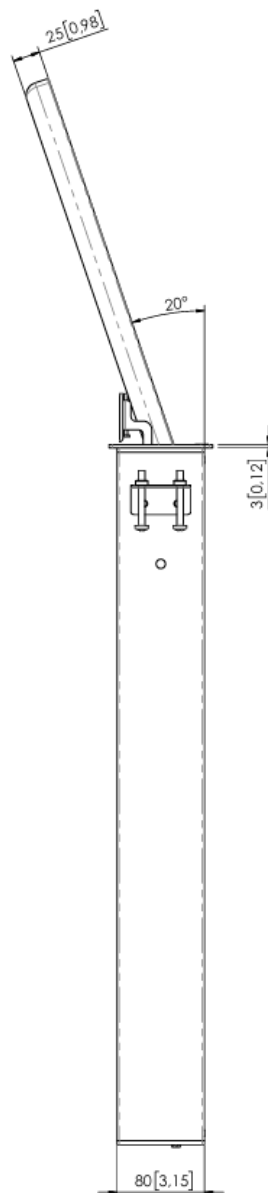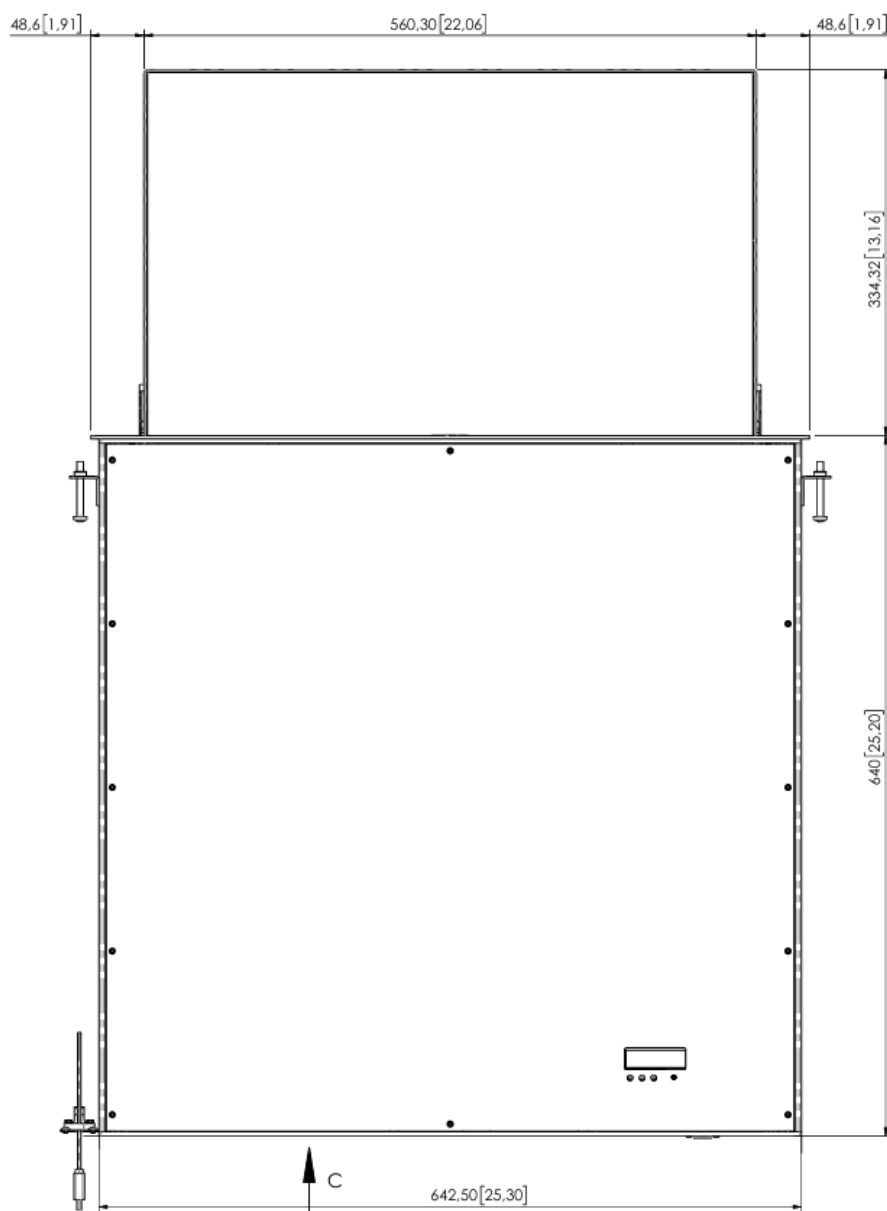

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!