

DynamicShare Stand Alone

HDMI signal distribution & selection system



Highlights

- Plug and play solution
- Software free
- High security
- No video compression (no latency)
- 3/ HDMI Inputs, 1/HDMI Output
- Dedicated ports for Loop In and Loop Out
- HDCP compliant
- Ethernet external control
- Digital audio Output
- Easy cabling and installation
- Allows the daisy chain of up to 20 devices (Full HD)

General

Wired share system that allows to select between 3 different HDMI inputs and to distribute the selected input to the rest of devices connected in a daisy chain topology. The HDMI signal can be shared on up to 20 monitors in Full HD resolution. DynamicShare Stand Alone is a highly reliable, secure and straightforward solution. It allows meeting participants to connect their device direct to the share system and share different video sources among each other with an optimal quality (no latency) and without the need to install any software, to have technical knowledge or require any assistance.

The signal is distributed via HDMI cables providing the highest security. The meeting or conference table can stand alone, without the inconvenience of either messy cabling or the need to use external devices. The AHDSSA allows an easy connection of other devices to the system such as large screens, projectors, videowalls or matrixes.

Connectivity

Input signal	HDMI1, HDMI2 & HDMI3
Output signal	HDMI 1
Loop	HDMI in & HDMI out
Audio	Digital Audio Output

Control

Ethernet	
----------	--

Electrical

External power supply	100-240Vac, 50/60Hz, 12Vdc
Power consumption	10W

Accessories

AHBTEK	HDBaseT Kit that consist of one transmitter and one receiver to extend the HDMI connection above 5 meters form the first to the last unit of the loop
AHSACB	Stand-alone control interface for sharing and input selection
AHSACBP	Stand-alone control interface for sharing, input selection and priority

Mechanical

Dimensions	206 x 105 x 29 mm [8.11" x 4.1" x 1.14"]
Weight	0.3Kg /0.66Lbs

Certifications

- CE
- FCC


Warranty

- 2 years general warranty

Consultants, architects and engineers specifications

The enclosure shall be built in coated painted steel and shall be built by a HDCP licensed manufacturer. The system shall allow the selection of 3 HDMI inputs with 1 HDMI output and the distribution to a maximum of 20 devices connected in daisy chain topology using HDMI cables with Full HD resolution. The device shall have a dedicated Loop In and Loop Out ports.

The device shall provide a Digital Ouput for audio. The system shall be controlable by Ethernet and shall provide external control interfaces for selection of input, priority and sharing.

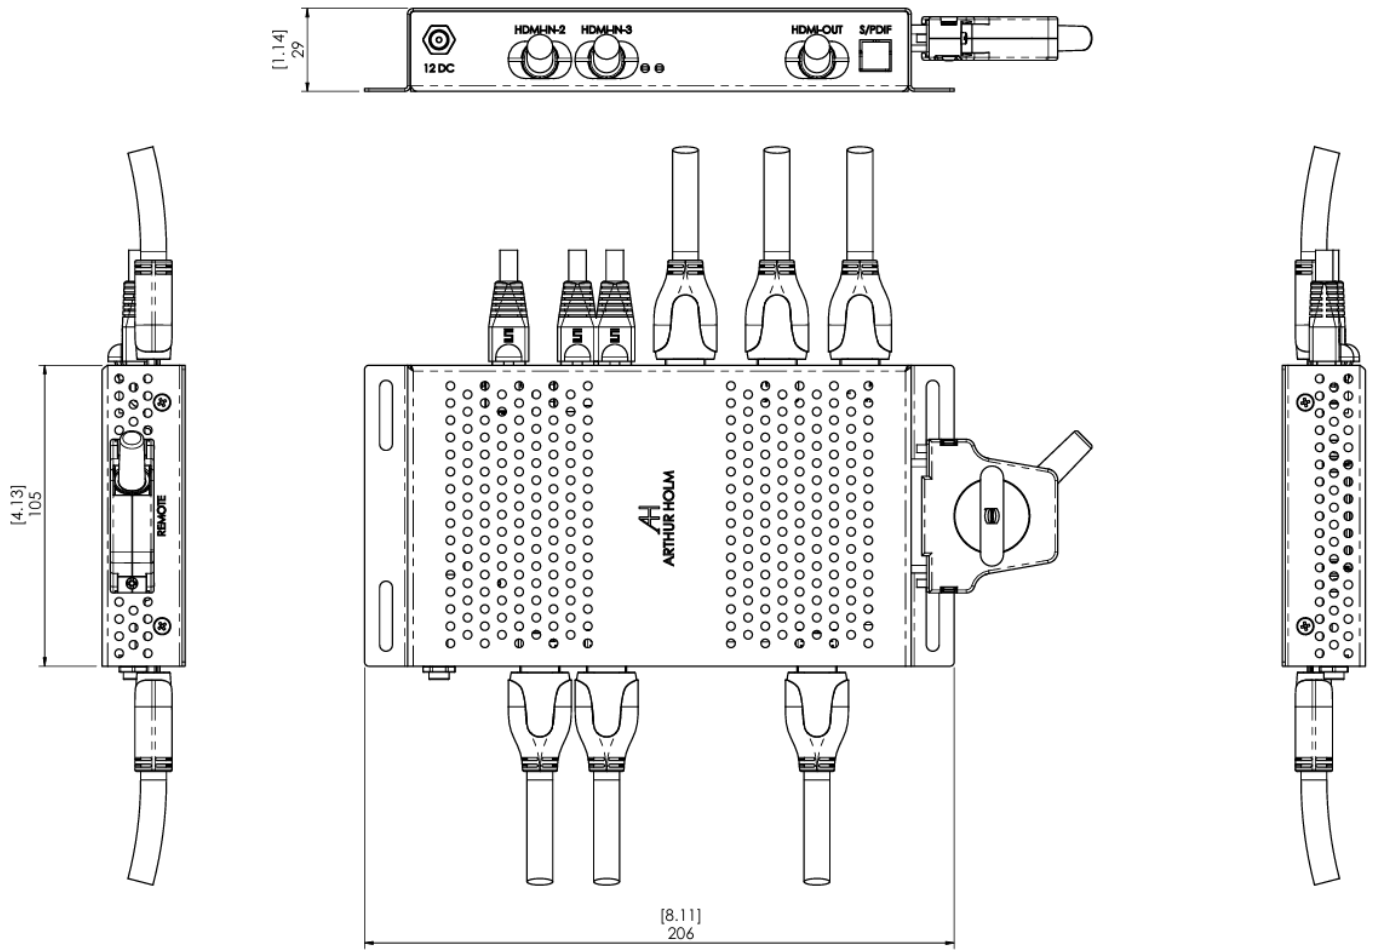

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!