

Features

- 360 degrees loudspeaker
- 2 Way coaxial speaker 5,25"
- 100W Class D amplifier
- Acoustic omnidirectional diffuser
- DSP integrated balanced line input
- IP controlable
- IP Grade: IP56

General

The Arthur Holm motorized 360° marine speaker is designed for high-quality audio on yachts with a marine-graded design and materials for seamless integration into jacuzzis and pool areas. This retractable self-powered speaker system appears when the audio is required, providing high-quality sound. Its integrated drain system allows water splashes to pass through the speaker without changing the frequency response. Its horizontal omnidirectional audio dispersion makes the speaker perfect for installations in open areas like the deck and the central part of the wet area providing a balanced audio distribution.

The seamless and unobstructive adaptation of the speaker to make it easy to fit in has been made possible with its “ready-to-be-veneered design” allowing upholstering of the top plate with different types of materials, from ship deck wood to other similar materials and, therefore, making the speakers invisible when in retracted position.

An external control unit consists of a 100W class D Arthur Holm amplifier along with a DSP system and balanced analogue audio input. The whole system can be controlled through an ethernet port to achieve central control of the speakers for smooth integration into the yacht leisure control. The entire system is powered by a 30V medical grade power supply along with a high sensitivity differential switch (10mA).

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà - Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

Technical Specifications

Audio Features

Driver Type: 5.25" Coaxial + 1" Tweeter
Power Handling: 100W Class-D Amplifier
360° dispersion
Balanced analogue audio input. Level line 0dB
Internal DSP
Frequency Range: 70Hz - 20KHz (±5dB)
Adjustable gain through AHnet (RS-422/RS-485 Full Duplex Protocol) ON
Mute function through AHnet (RS-422/RS-485 Full Duplex Protocol) ON

Materials

Brushed stainless steel
Steel

Finishing

Speaker driver mat black
Speaker diffuser mat black, non-reflecting
Cover plate in brushed stainless steel / mat black / white
Black housing

Connectivity

USB Port for software update
Via multicore cable and 7-pin waterproof connector

Engine

RJ45 CAT6	Ethernet
-----------	----------

Electrical

External power supply	100-240 Vac, 50/60Hz. 30VdC
Power consumption	90W

Mechanical

Top frame	Ø 296 x 10mm [11.65" x 0.39"]
Housing below the mounting surface	Ø 304 x 535 mm [11.97" x 21.06"]
Weight	23.6 Kg / 52.03 Lbs

Safety

- Medical grade power supply
- 10mA differential switch, in the control box
- Ground connection terminal, in the control box
- Ground connection terminal on the speaker
- Electronic detection of engine entrapment
- Upper plate is released in case of entrapment

Options

- Dante (with adapter)

Warranty


- 2 years general warranty

Consultants, architects and engineers specifications


The 360° marine speaker shall be motorized to be raised and lowered into its housing, which shall function as a mounting support with a draining system. The speaker shall be prepared for additional material to be added on top of it to blend into the rest of the design. The motorized active loudspeaker shall be two-way, the system consisting of a 5.25" coaxial omnidirectional transducer with a 100W class-D amplifier and DSP technology integrated, omnidirectional acoustic diffuser. The dispersion shall be 360° and on-axis frequency response shall be 70Hz-20kHz +/- 5dB.

The system shall be controlled through IP (AHnet protocol). The system shall consist in two modules: the motorized speaker and its control and amplification box that shall be united by means of a 6m long multi-pair cabling. The system shall provide ETHERNET (For remote control), 0dBV balanced analogue line input and a USB port (to update the FW). The speaker shall be serviceable by only removing the transducer housing. The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The marine speaker shall be compatible with AHlink Android and iOS app which allows access to the setup, diagnose and control menus.


Response vertical 0°:

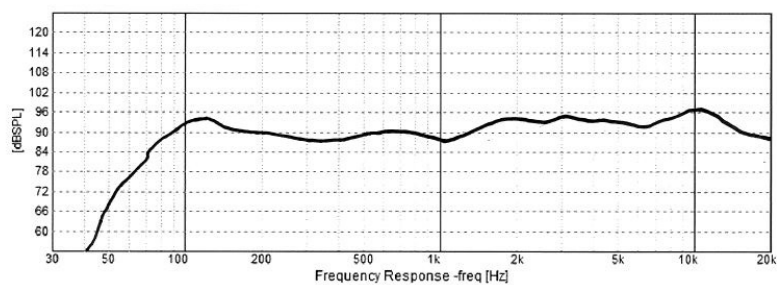

Response vertical 25°:

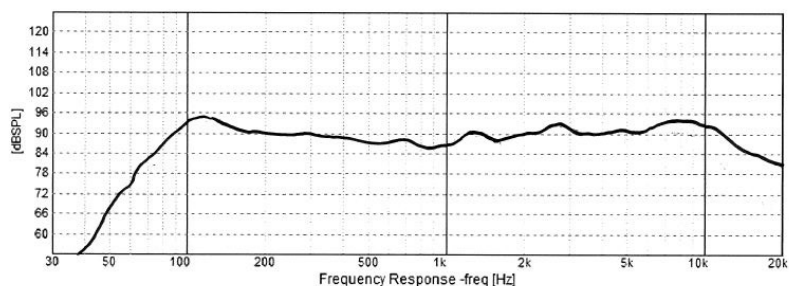

Response vertical 50°:

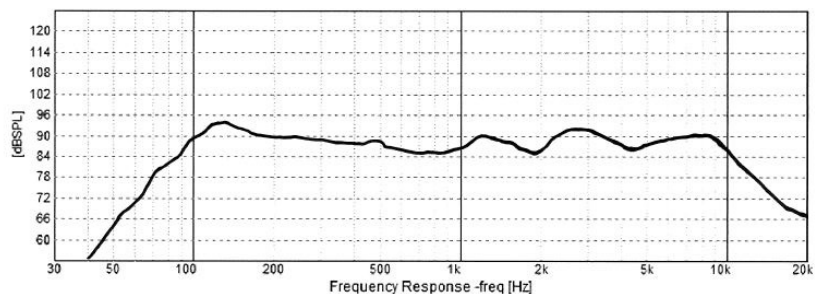


Impedance curve:




ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà - Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.


Make Your Meetings Count!

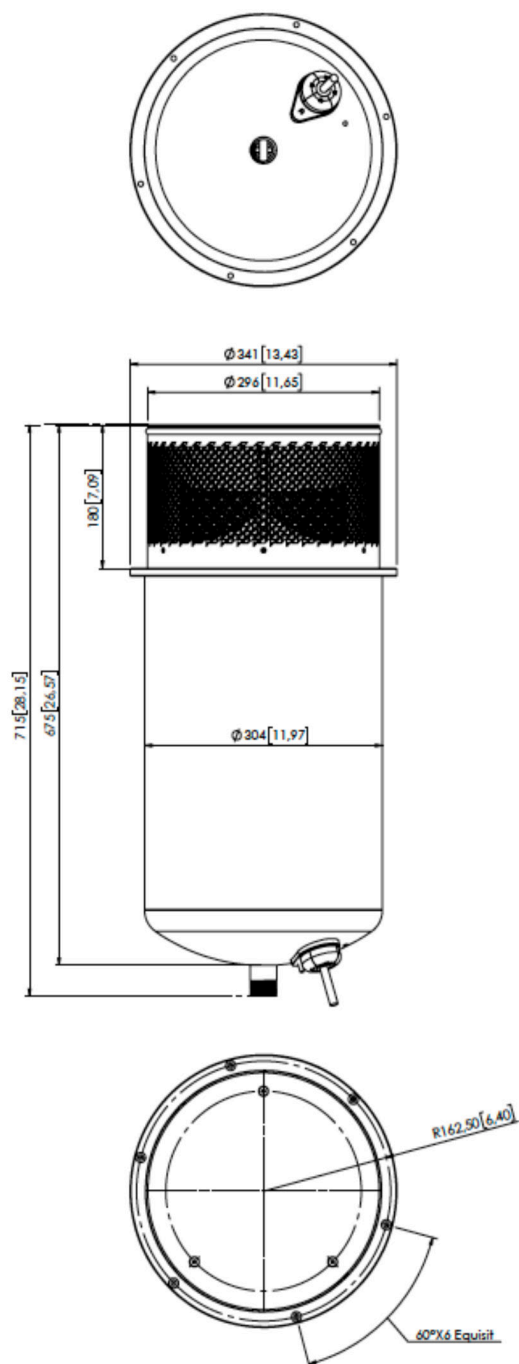

AMPLIFIER CABINET

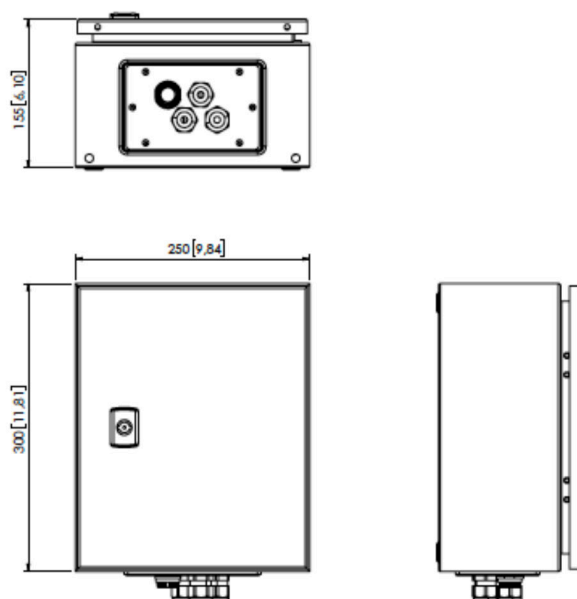

ELECTRIC SCHEME

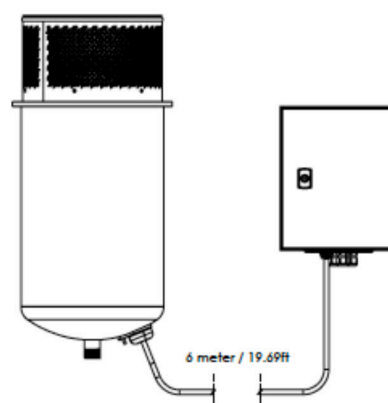

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà - Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!