

# AH1

Professional HDCP compliant aluminum manually foldable monitor









# Highlights

- Professional manually foldable monitor
- Milled anodized aluminum housing
- Manually foldable from 0° to 70°
- Stepless viewing position
- Double-sided anti-reflective glass
- Auto-Stand-By
- Easy to install
- USB passthrough
- Maintenance free
- Energy saving design, low consumption video controller



# AH17TXHDGA B

#### **General**

Arthur Holm AH1 manually foldable professional monitors are the perfect solution to create a flexible and versatile meeting environment when the space is limited. The monitor is fixed to the table surface through its black iron base, allowing the user to adjust the viewing angle of the monitor and hold the monitor in a firm viewing position.

The base hides the cable connection and guides the cables unseen away from the monitor when using the cable exit in the centre of the base or, if needed, the rear cable outlet.

The screen position can be easily adjusted from flat on the table (0°) to 70°. The monitor includes a USB passthrough from the side.

# **Technical Specifications**

### Display

Size	FULL HD 17.3" TFT Active Matrix, widescreen format. LED backlight
Resolution	1920 (h) x 1080 (v)
Brightness	400cd/m2
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/ 80° (u/d) 80°/ 80° (l/r)
Viewing area	381.888 (h) x 214.812 (v) mm
Response time	Tr + Tf = 40ms
Temperature	Operating 0° ~ +40°C Storage -20° ~ +60°C

#### **Materials**

Monitor housing	Milled aluminum with anodized finishing
Glass	Anti-reflective 2-side coating 3mm black edged glass

# Connectivity

Indui sianai	HDMI (1 input) HDCP compliant
	Compilani

#### **Electrical**

External power supply	100-240Vac, 47/63Hz, 12Vdc
Power consumption	50W

#### **Mechanical Dimensions**

subject to change without previous notice

Monitor	414 x 275.97 x 19mm
	[16.30" x 10.86" x 0.75"]

#### **Control Panel**



# **Options**

• Projected capacitive multi-touch screen

#### Certifications

- CE
- IECEE
- CB

# Warranty


• 2 years general warranty


# Consultants, architects and engineers specifications

The monitor shall provide a manually adjustable position from 0° to 70°. The monitor housing shall be made of anodized aluminum with an anti-reflective 2-side coating 3mm black edged glass. The monitor shall provide one black iron base with hidden cables and no visible screws.

The 17.3" Full HD monitor shall have a brightness of 400cd/m2 and a contrast ratio of 600:1. The monitor shall provide 1 HDMI HDCP input by a licensed HDCP manufacturer from the side.

UNFOLD 70°

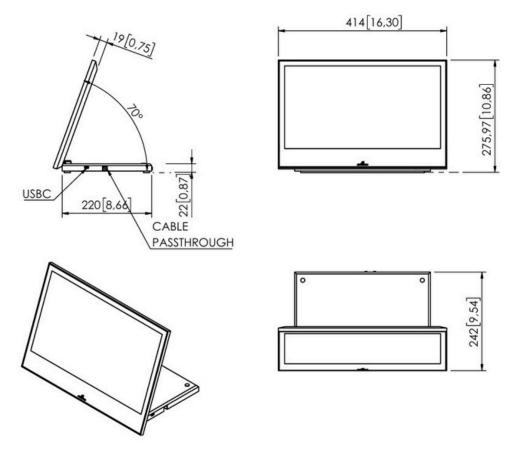

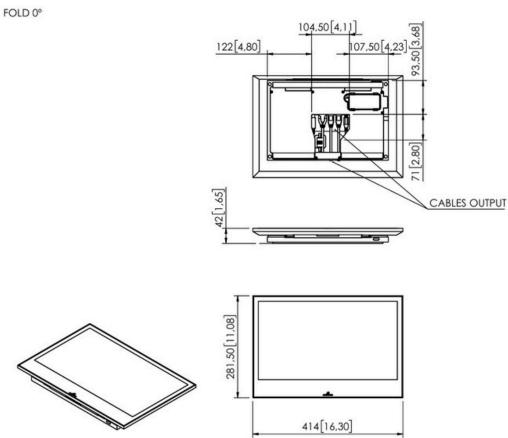

#### ARTHUR HOLM