


DynamicSignatureDisplay


Aluminum retractable double-sided motorized solution for digital labelling







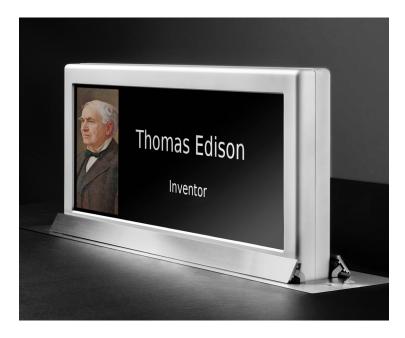

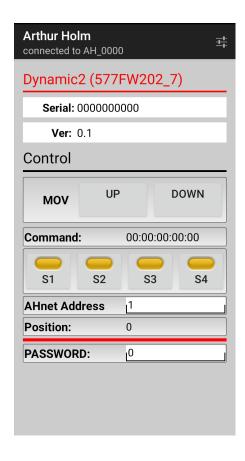

Highlights

- Vertical motorized HDCP compliant double-sided retractable monitor
- Passive cover plate
- Interactive Setup Display (ISD)
- Maintenance free
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Wireless connectivity for setup and control
- Auto Mechanical Movement Calibration (AH-AMMC)
- Compatible wireless connectivity for setup and control via AHlink

General

The DynamicSignatureDisplay is a vertically retractable solution with two half screens placed back-to-back in a compact anodized aluminum frame. The DynamicSignatureDisplay is a retractable digital labelling monitor for auditoriums, meeting and conference rooms, institutions and public communication spaces. The monitor is only visible when required, disappearing inside the table by just the touch of a button or by remote control. The side of the screen facing the audience will display the picture and name of the conference participants, and the information in the other side allows the attendee to identify their seat.

The DynamicSignatureDisplay is equipped with a Linux based player, with TCP/ IP interface for control, configuration and content upload and management. The system is ideal for name tagging applications over a single Ethernet connection per monitor.

The system needs a dedicated network to operate. It is necessary to add a server, and the management software is pre-installed and configured from factory.

The monitors are equipped with Auto Mechanical Movement Calibration (AH-AMMC). The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The monitor is compatible with AHlink Android and iOS app allows access to the setup, diagnose and control menus.

Technical Specifications

Display	
Size	18.5" TFT Active Matrix, half widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	500 cd/m2
Contrast ratio	1000:1
Pixel	0.213 (h) x 0.213 (v) mm
Viewing angle	89°/89° (u/d) 89°/89° (l/r)
Viewing area	408.96 (h) x 230.04 (v) mm
LED backlight lifespan	50,000 hrs
Response time	Tr + Tf 20ms
Temperature (operating/storage)	Operating 0°C ~+40°C Storage -20°C ~+60°C
Materials	
Materiais	
Monitor housing	Anodized Aluminum
	Anodized Aluminum Stainless Steel
Monitor housing	
Monitor housing Cover plate	
Monitor housing Cover plate Connectivity x2	Network ethernet connection. Embeded LINUX integrated with special software for Signature Name, externally controlled by
Monitor housing Cover plate Connectivity x2 RJ45 CAT6 ftp RJ45 CAT6 ftp (with	Network ethernet connection. Embeded LINUX integrated with special software for Signature Name, externally controlled by LINUX server Addressable RS-422/RS-485 Full Duplex monitor control by AHnet

Control

RJ45, RS-422/RS-485 Full Duplex (I/O)		
Addressing		
Termination switch		
GPI		
IR Remote control (monitor adjustments): 1 Remote control is provided every 5 motorized devices		
Movements Control		
User interface on monitor	(Up/Down)	
Remote	RS-422/RS-485 Full Duplex I/O, GPI	
Electrical		
External power supply	100-240 Vac, 50/60Hz, 12Vdc	
Power consumption	90W	
Mechanical		
Screen	461 x 200 x 40m [18.15" x 7.88" x 1.58"]	
Cover plate	575 x 95 x 3mm [22.63" x 3.74" x 0.118"]	
Housing below the table	556 x 83.5 x 590mm [21.88" x 3.29" x 23.22"]	
Weight	22 Kg / 48.5 Lbs	

Options


• AHDSServer (server system)

Warranty


- Certifications
- 5 years limited warranty
- 2 years general warranty

- CE
- **IECEE**

Connectivity Panel

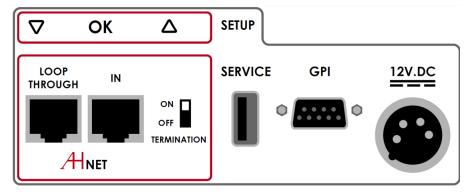

Interactive Setup Display (ISD)

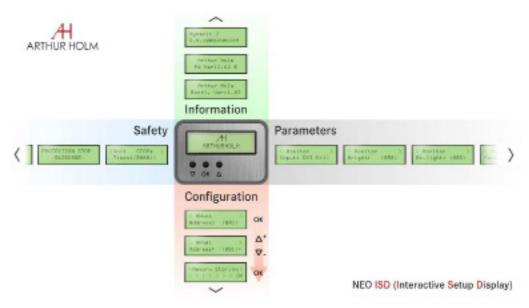

Screen to configure the monitor address in the RS422 AHnet.

Consultants, architects and engineers specifications

Vertically retractable motorized 18.5" professional solution with two half monitors placed back-to-back in a compact anodized aluminum frame. The monitor housing shall be made of milled anodized aluminum and the cover plate shall be made of brushed stainless steel. The monitors shall have a brightness of 500 cd/ m2, a contrast ratio of 1000:1 and a backlight lifespan of 50.000 hours. The solution shall provide Ethernet inputs per each monitor (2) with an Interactive Setup Display (ISD) allowing the control, setup and diagnose of the monitors. The solution shall provide 2 embedded PCs and a Linux based software.

The monitor shall provide an addressable RS-422 / RS-485 Full Duplex and an easy-to-read interactive setup display (ISD) for the setup, diagnose and control, and shall be compatible with ERT-30 and ERT 60. The use of the Arthur Holm's ERT will enable the address configuration of all the units installed in a table by simply pressing a button.

The monitor shall be able to run an auto-adjustment program to reset the factory security ratio between its factory movement speed and its protection parameters adapting the unit to the way it has been installed. The monitor shall provide a USB port for firmware upgrades. The monitor shall be compatible with the AHlink wireless Android and iOs App for the setup, diagnosis and control.

ARTHUR HOLM

