


DynamicLoop Stand-Alone

HDMI video input distribution

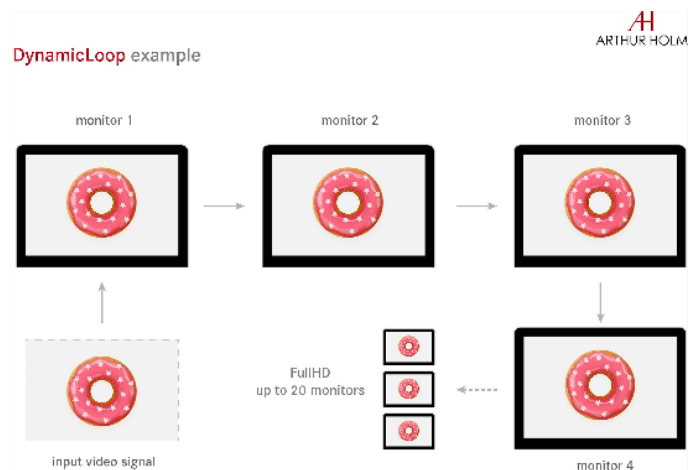

Highlights

- Plug and play solution
- Software free
- High security
- No video compression (no latency)
- 3/ HDMI Inputs, 1/HDMI Output
- Dedicated ports for Loop In and Loop Out
- HDCP compliant
- Easy cabling and installation
- Allows the daisy chain of up to 20 devices (Full HD)

General

Wired video signal distribution system which allows to daisy chain the monitors in a loop using HDMI cables. The HDMI signal can be shared on up to 20 monitors in Full HD resolution. DynamicLoop StandAlone is a highly reliable, secure and straightforward solution. The signal is distributed via HDMI cables providing the highest security. The meeting or conference table can stand alone, without the inconvenience of either messy cabling or the need to use external devices. The AHDLSA allows an easy connection of other devices to the system such as large screens, projectors, videowalls or matrixes.

DynamicLoop can also be combined with a distributor to get as many outputs as required. It significantly contributes to optimize the cabling and installation time in large projects.

Technical Specifications

Connectivity

Input signal	HDMI1, HDMI2, HDMI3
Output signal	HDMI1
Loop	HDMI in & HDMI out
Audio	Digital Audio Output

Electrical

External power supply	100-240Vac, 50/60 Hz, 12Vdc
Power consumption	10W

Accessories

AHSACBL	External box comprising buttons for input selection
---------	---

Mechanical

Dimensions	206 x 105 x 29 mm [8.11" x 4.1" x 1.14"]
Weight	0.3Kg/ 0.66Lbs

Options

- External box comprising buttons for Loop input selection

Certifications

- CE

Warranty

- 2 years general warranty

Consultants, architects and engineers specifications

The enclosure shall be built in coated painted steel and shall be built by a HDCP licensed manufacturer. The system shall allow the selection of 3 HDMI inputs and HDMI Loop (HDMI in and HDMI out) for signal distribution to a maximum of 20 devices connected in daisy chain topology using HDMI cables with Full HD resolution. The device shall have a dedicated Loop In and Loop Out ports.

