

Highlights

- Motorized wall mount for videoconference cameras
- AHDV01: Upwards moving cover
- AHDV02: Downwards moving cover
- Compatible with the most popular videoconference cameras
- Cover prepared for veneering
- RS-422/RS-485 Full Duplex and Infrared controllable
- Easy to install

General

The DynamicVision is an efficient motorized solution to hide videoconference cameras and improve the room design. The DynamicVision is designed to be adapted to the room décor. Its fabric mounting system allows an easy mount of the fabric of your choice onsite. The DynamicVision can also be veneered with a maximum veneer load of 2.5kg/ 5.5lb.

The DynamicVision neatly stores the camera away when not required, both protecting the camera and securing the work environment. The front enclosure moves vertically to expose the camera while moving the camera forward simultaneously to free the camera lines from the enclosure.

The DynamicVision is the perfect solution for system integrators, architects, interior designers and space planners.

The camera enclosure is activated and controlled via RS-422 / RS-485 Full Duplex and infrared remote control. The DynamicVision is compatible with the AHlink Android and iOS App allowing access to the setup, diagnosis, and control.

Technical Specifications

Movements	
Control Up/Down	RS-422/RS-485 Full Duplex
	IR remote control
Electrical	
External power supply	100-240Vac, 50/60Hz, 12Vdc
Power consumption	30W

Certifications

- CE

Warranty

- 2 years general warranty

Consultants, architects and engineer's specifications

AHDV01: Motorized camera wall enclosure for videoconference cameras. Upwards moving cover

The motorized holder and cover up for videoconference cameras shall have tray support that slides in and out and the cover shall move vertically upwards. The cover shall be made of aluminum and shall be prepared for veneering. The cover shall allow a maximum veneer load of 2.5kg/ 5.5lb.


The system shall be controlled via infrared, contact closure and RS-422 / RS-485 Full Duplex.

AHDV02: Motorized camera wall enclosure for videoconference cameras. Downwards moving cover

The motorized holder and cover up for videoconference cameras shall have tray support that slides in and out and the cover shall move vertically downwards. The cover shall be made of aluminum and shall be prepared for veneering. The cover shall allow a maximum veneer load of 2.5kg/ 5.5lb.


The system shall be controlled via infrared, contact closure and RS-422 / RS-485 Full Duplex.

Connectivity Panel

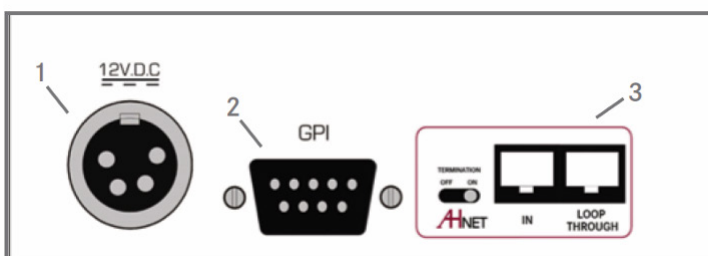

CONNECTIVITY


- 1- Power input
- 2- GPI control
- 3- AHnet control interface

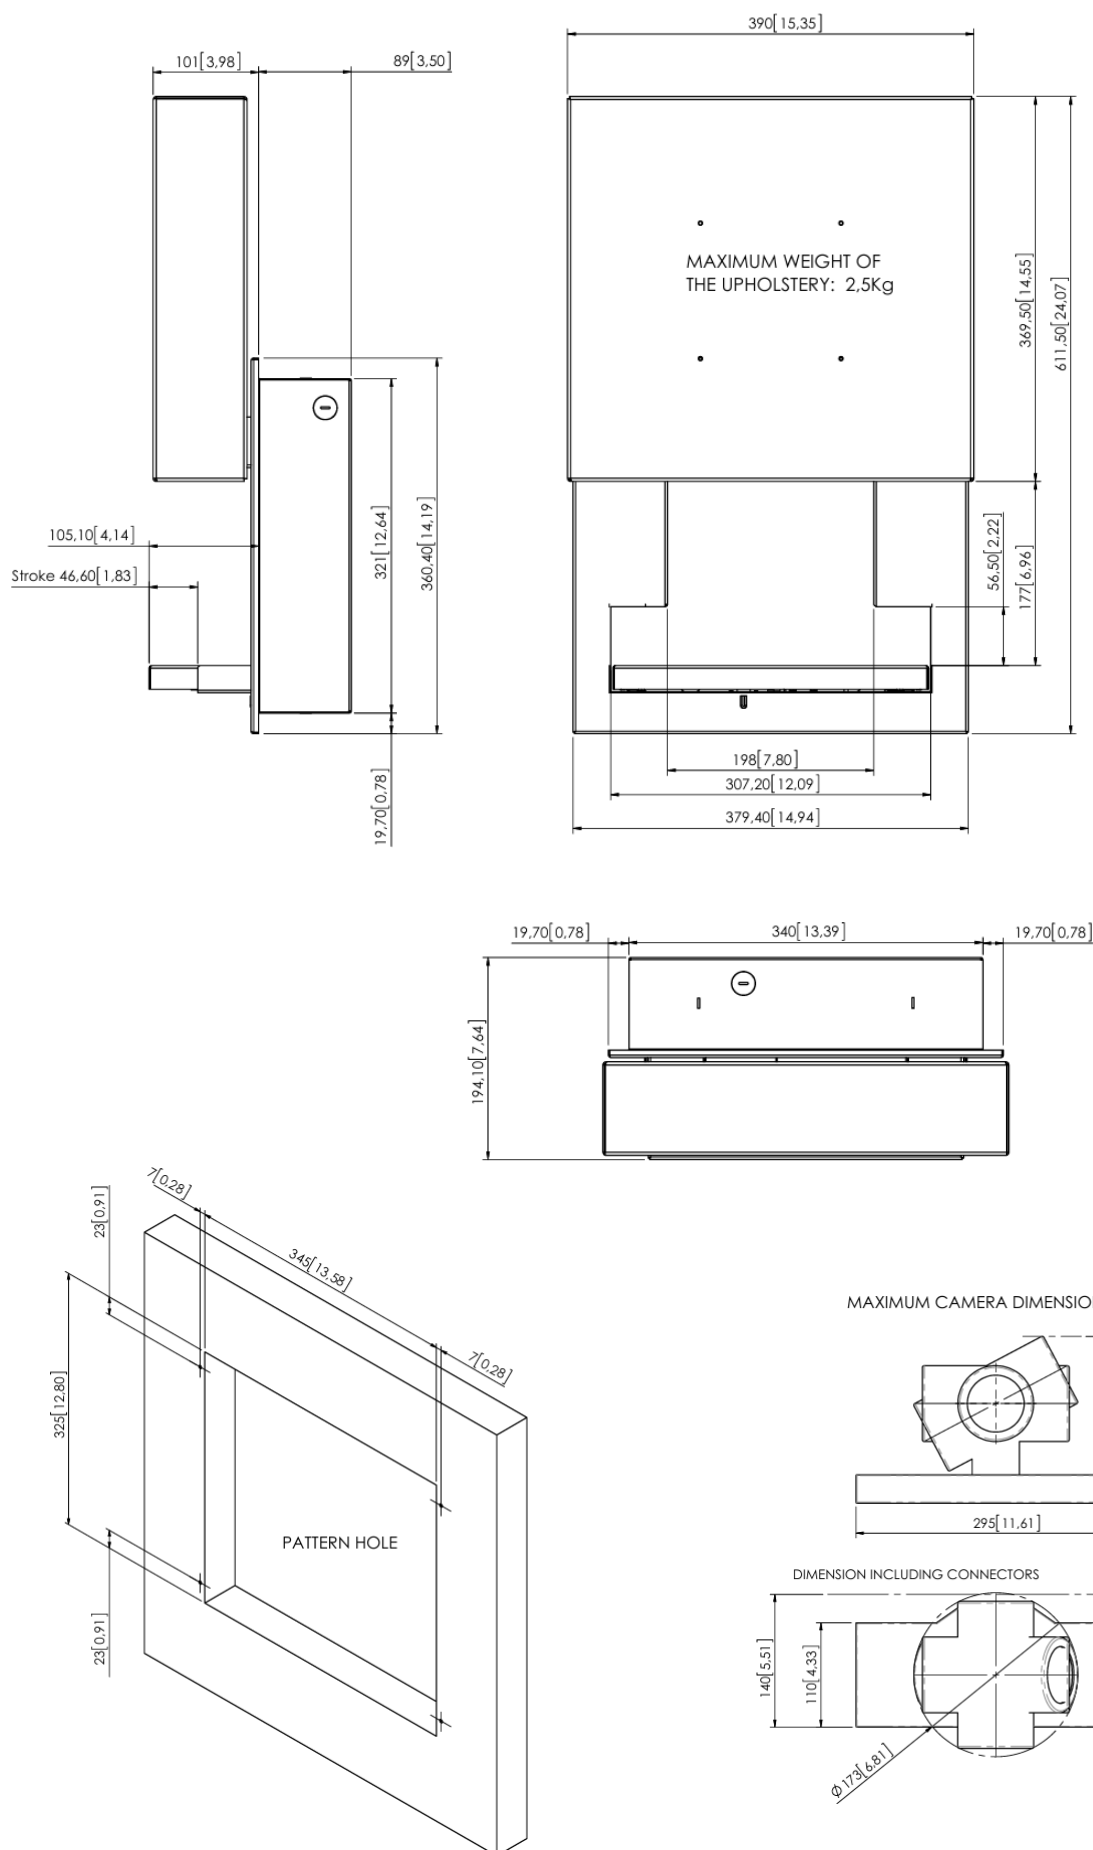

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

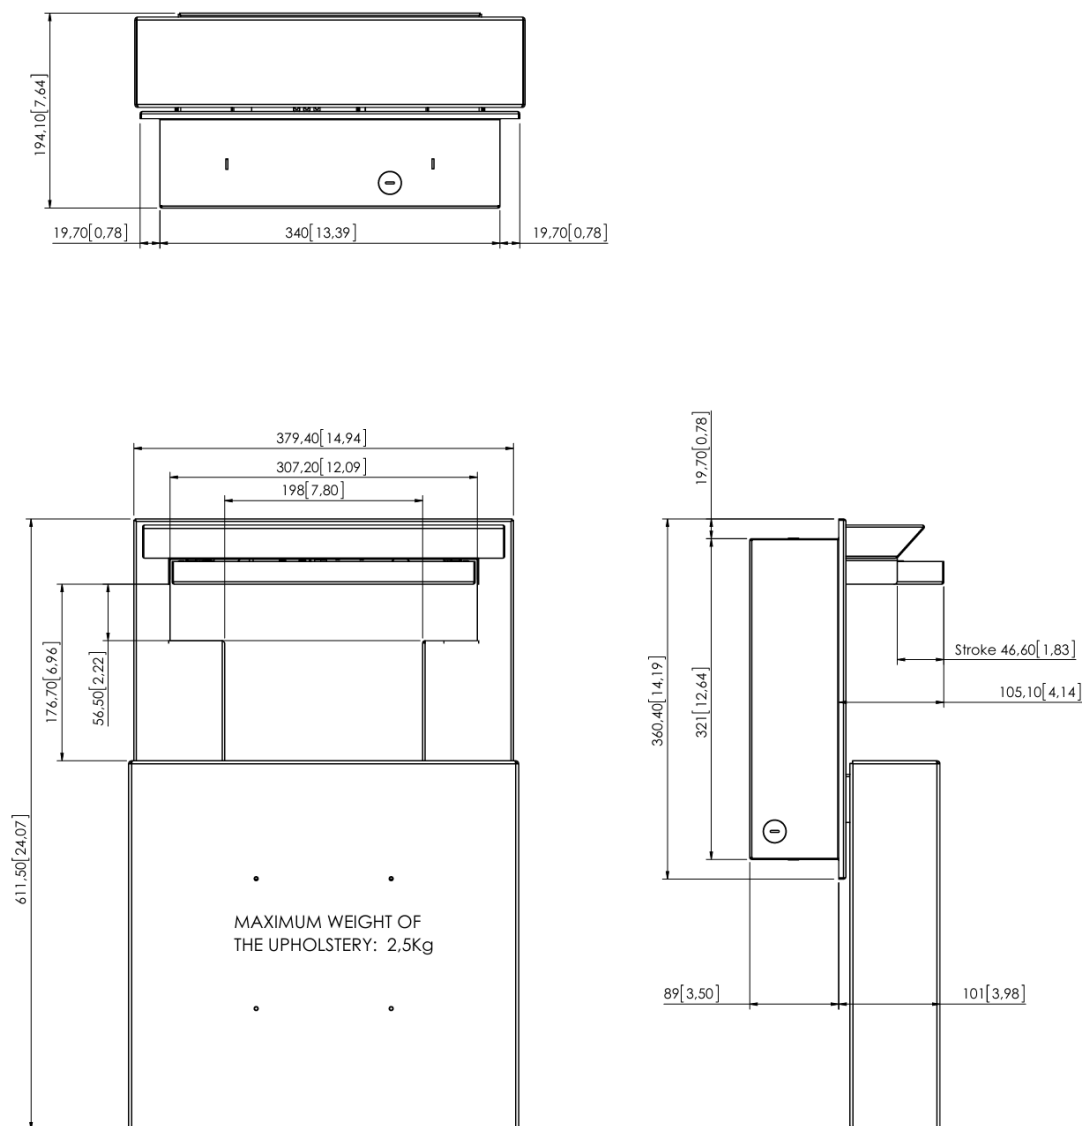

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!