

DynamicCL

Motorized camera lift for 360° camera
(Camera not included)



Highlights

- Motorized lift for 360° cameras
- Integrated camera power and cable for connectivity
- RS-422/RS-485 Full Duplex for remote control
- Black cover plate
- Custom color options available for the cover plate material.

General

The DynamicCL is a motorized camera lift system for tabletop 360° cameras that has been designed to hide table cameras when not in use. Table cameras often cover all the people at the table and are therefore located in a central position on the table.

The up and down movement can be controlled remotely via RS-422 / RS-485 Full Duplex or locally on the device via a capacitive touch button.


The DynamicCL has the well-known Arthur Holm build quality with a smooth and almost silent movement of the camera. It has a black steel cover plate with a capacitive touch button to control the movement of the device.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

Connectivity

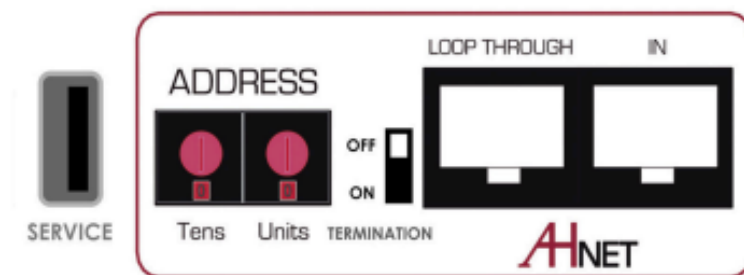

Technical Specifications

Materials

Steel, aluminum, nylon

Finishing

Black cover plate

Connectivity

USB Port for software update

JACK input power

Motor Control

Control Up/Down	Capacitive touch control sensor on cover plate
RJ45 CAT6	Addressable RS-422/RS-485 Full Duplex for AHnet protocol

Electrical

External power supply	100-240 Vac, 50/60Hz. 12VdC
Power consumption	30W

Dimensions

Upper cover plate	Ø 216 x 3 mm [8.50" x 0.12"]
Housing below the table	514.50 x 174 mm x 152 mm [20.26" x 6.85" x 5.98]
Weight (camera not included)	5Kg /11.02Lbs

Certifications

- CE

Compatible cameras

- Neat Center
- Logitech Sight
- AudioCodes RXVCam360
- Panasonic PressIT360
- For other 360° cameras, please contact us.

Consultants, architects and engineers specifications


The motorized camera lift system shall retract the camera when not in use. The movements of the motorized camera lift shall be controlled remotely via RS-422/RS-485 Full Duplex or locally on the device via a capacitive touch button.

The lift shall provide a black steel cover plate with a capacitive touch button to control the up and down motion.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.


Make Your Meetings Count!

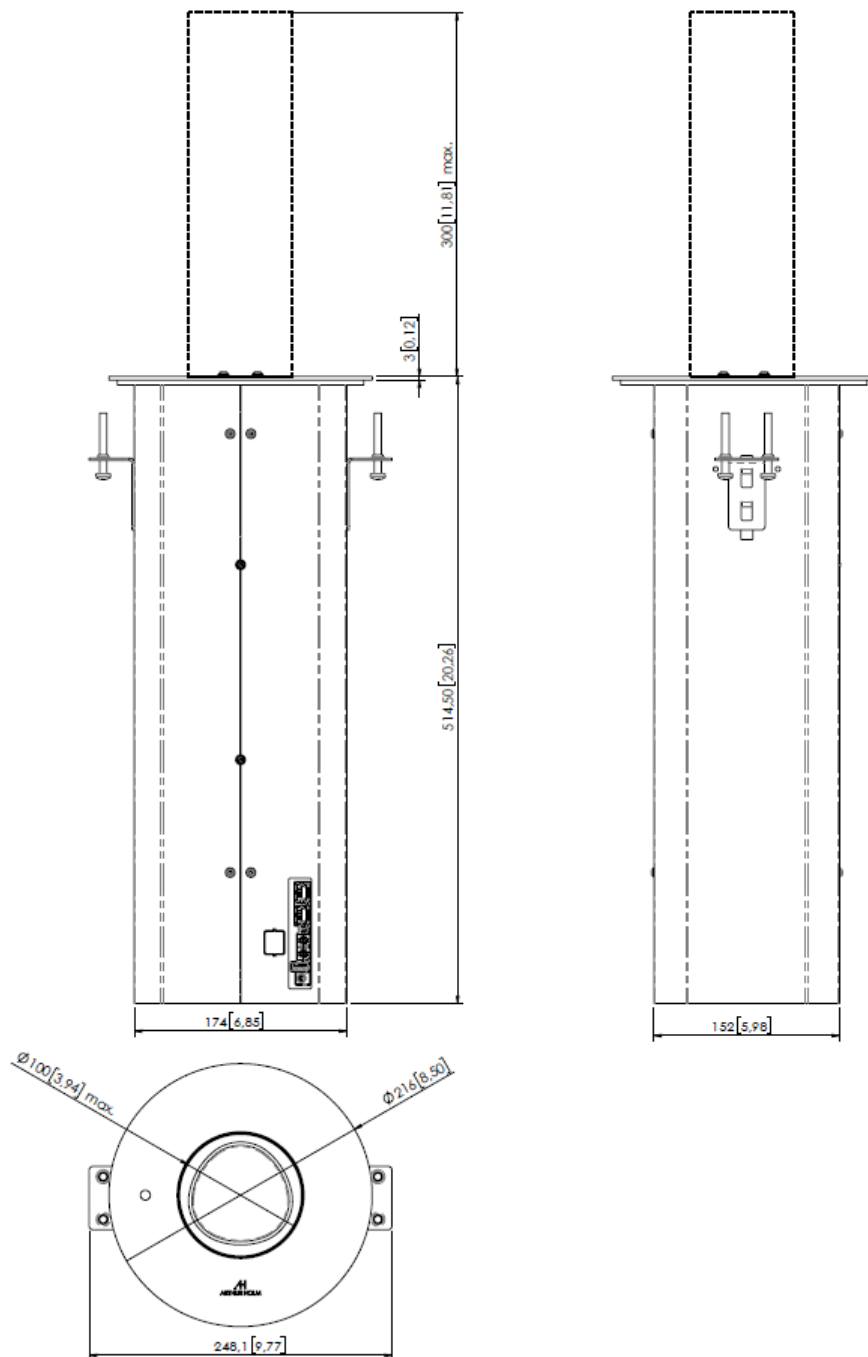

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

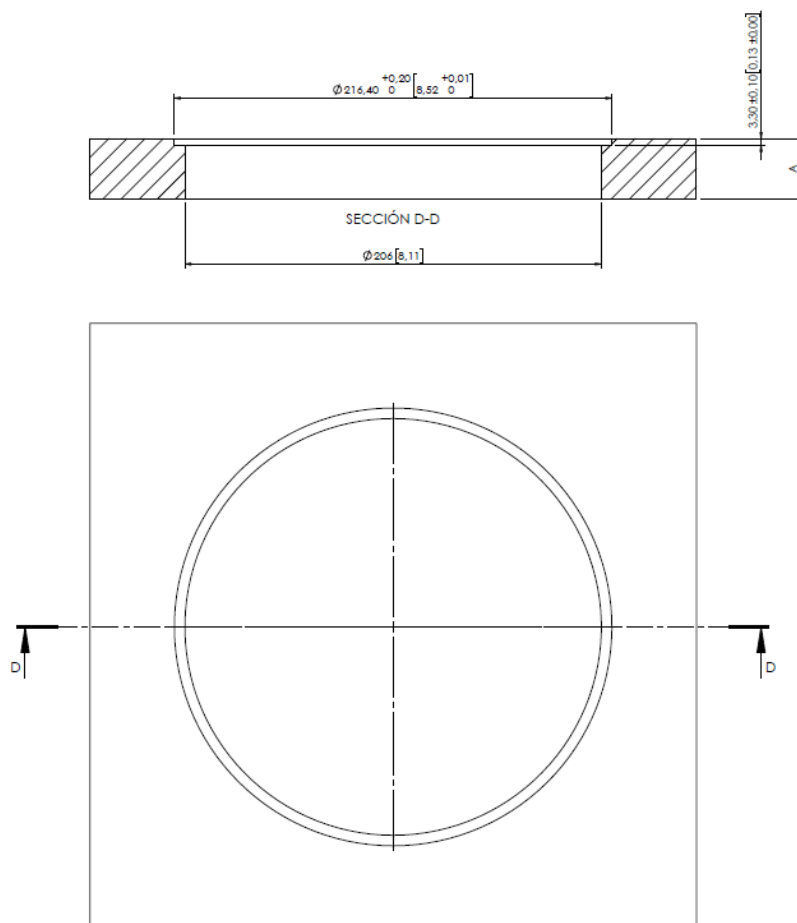

Ref. AHDCL v1

CP. 9004

A= FROM 11 [0,43] TO 75 [2,95]