
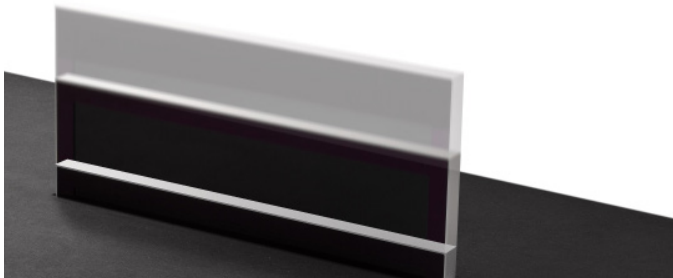
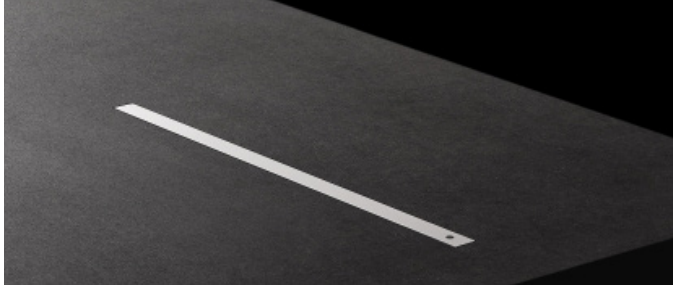


DB2

HDCP compliant aluminum retractable motorized monitor



Dynamic DB2 (577FW202)

Serial: 0000000000

Ver: 1.37

Control

MOV UP DOWN

DISP ON OFF

DVIA DVI1 DVI2

BACKL 99

CONTR 62

BRIGH 59

SAVE VALUES AHLINK OFF

Command: FA:01:01:00:00

S1 S2 S3 S4

AHnet Address 1

Position 0

PASSWORD: 0

Highlights

- Vertical motorized HDCP compliant monitor with up to 20° of inclination
- Adjustable screen tilt angle
- No cover plate required (monitor completely streamlined within the furniture)
- One operation sensor on top of the aluminum housing (to rise and lower the screen and adjust the tilt angle)
- One operation sensor on the screen glass (to adjust the tilt angle and lower the screen)
- 20mm max of thickness
- Interactive Setup Display (ISD)
- Can be veneered
- Maintenance free
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Comptabile wireless connectivity for setup, and control via AHLINK
- Auto mechanical Movement Calibration (AH-AMMC)

AHlink : the App for setup, control and diagnose



ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

General

Arthur Holm's DB2 is a motorized retractable monitor range that creates minimum impact on the furniture's design. It is easy to integrate, intuitive to use (one simple operation sensor located on the top of the monitor) and almost invisible (no cover plate, neatly streamlined into furniture) when not operating. DB2 provides a harmonious silent drive with variable speeds. With a maximum thickness of 20 mm, this monitor range is elegant, beautiful from all angles and can be veneered for a seamless integration into furniture, creating a long-lasting user's experience and delivering an exceptional image quality.

The screen is protected with an anti-reflective 2mm black-edged glass. DB2 are available from 17.3" to 23.8" with 2 HDCP compliant DVI or HDMI inputs and equipped with an Interactive Setup Display (ISD) allowing the control, setup and diagnose of the monitors. Monitors provide RS-422/ RS-485 Full Duplex allowing the remote control of movements, speed, safety settings, brightness, contrast and backlight levels. The monitors are equipped with Auto Mechanical Movement Calibration (AH-AMMC). The use of Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The monitors are compatible with the AHlink Android and iOS App, which allows access to the setup, diagnose and control menus.

Technical Specifications

Display

Size	Full HD 17.3" TFT Active Matrix, widescreen format. LED backlight
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m2
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/80°(u/d) 80°/80°(l/r)
Viewing area	381.888 (h) x 214.812 (v) mm
Response time	Tr 37ms, Tf 3 ms
Temperature	Operating 0°C ~ +40°C Storage -20°C ~ +60°C

Materials

Monitor housing	Solid mechanized aluminum housing with anodized finish. Front black-edged glass.
-----------------	--

Connectivity

Input signal	DVI-I (1 input) and DVI-D (1 input) – HDCP compliant
RJ45 CAT6 (with loop)	Addressable RS-422/RS-485 Full Duplex monitor control by AHnet protocol
GPI (SubD9)	Movements control (opto isolated)
USB	For service (firmware upgrades)

Electrical

External power supply	100-240 Vac, 50/60Hz, 12Vdc
Power consumption	50W

Control

RJ45, RS-422/RS-485 Full duplex, AHnet protocol
AHlink via ERT
Addressing
Termination switch
GPI
IR Remote control (monitor adjustments): 1 Remote control is provided every 5 motorized devices

Movement's Control

User interface on monitor	(Up/Down) Capacitive touch sensor
Remote	RS-422/RS-485 Full Duplex, GPI
AHlink	Via ERT

Accessories

ERT-30 / ERT-60	Ethernet Interface Unit
-----------------	-------------------------

Mechanical

Monitor Dimensions:	
Screen	424 x 282 x 20mm [16.69" x 11.11" x 0.79"]
Top frame	424 x 24 mm [16.69" x 0.94"]
Housing below the table	525 x 80 x 587 mm [20.67" x 3.15" x 23.11"]
Weight	19.5 Kg / 42.99 Lbs

Packaging Dimensions

Packaging Dimensions	735 x 725 x 185mm
Weight	22kg

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

Options and accessories



- Projected capacitive multi-touch screen
- DynamicLoop
- DynamicShare
- Painted
- Black anodized
- ERT-30 / ERT-60

Certifications

- CE
- FCC
- CB
- RoHS

Warranty


- 5 years for the mechanical parts

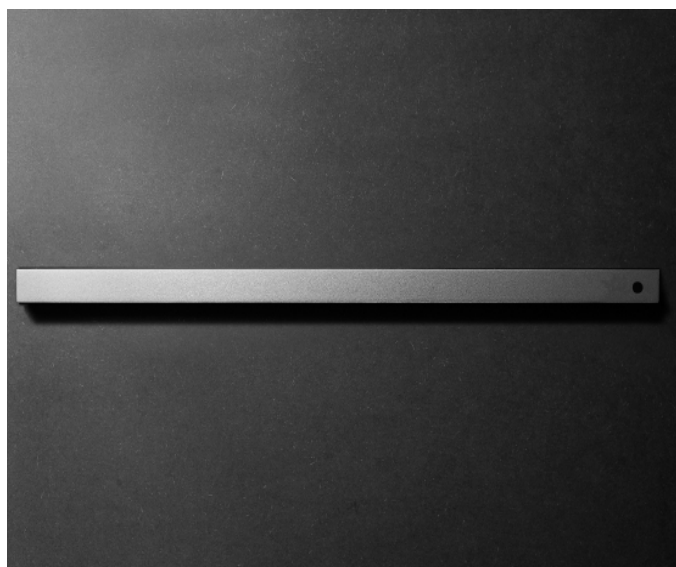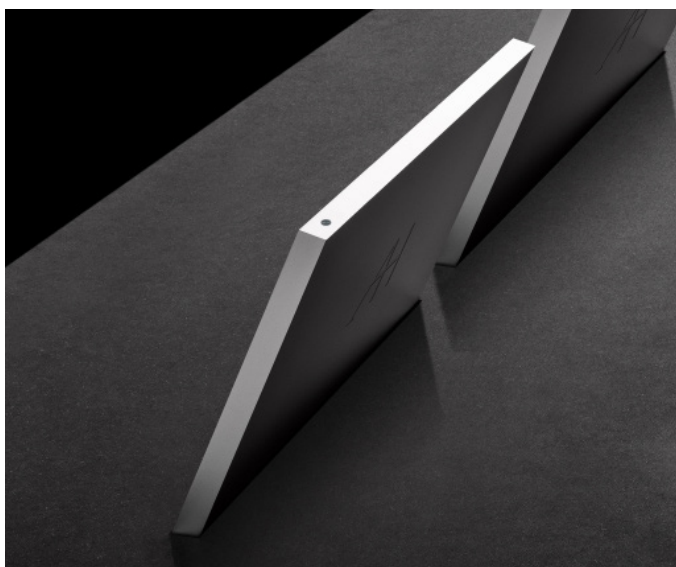


ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!

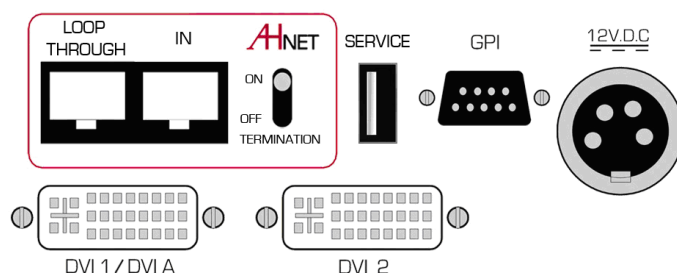

Interactive Setup Display (ISD)




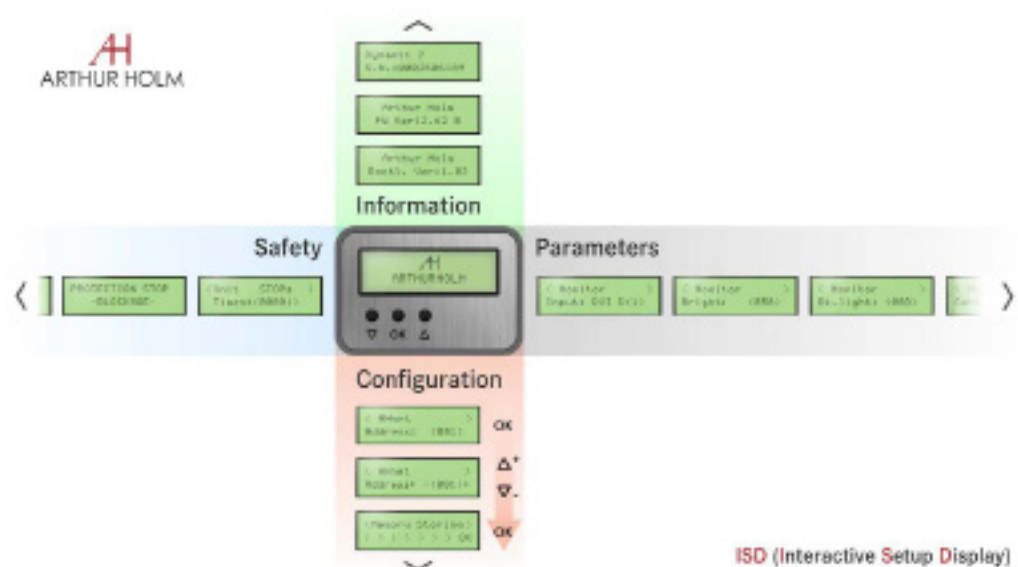


Consultants, architects and engineers specifications

Vertically retractable motorized 17.3" Full HD professional monitor. The monitor housing shall be made of milled anodized aluminum with a maximum thickness of 20mm and the screen shall be protected with an anti-reflecting 2-side coating 2mm glass. The monitor shall allow its installation into furniture opening with a maximum width of 24mm and shall be designed to be veneered to match the furniture's surface as an option.

The top of the monitor housing shall be flush with the table when in recessed position. A capacitive button placed on top of the monitor housing shall activate the monitor's up and down movements and the inclination angle to a maximum of 20°. The monitor shall have a brightness of 400 cd/m², and a contrast ratio of 600:1.

The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP manufacturer. The monitor shall provide a USB port for firmware upgrades. The monitor shall provide RS-422/RS-485 Full Duplex for the AHnet protocol and an Easy-to-Read Interactive Setup Display (ISD) for the setup, diagnose and control, and shall be compatible with ERT-30 and ERT-60. The monitor shall be compatible with the AHlink wireless Android and iOS App for the setup, diagnosis and control.

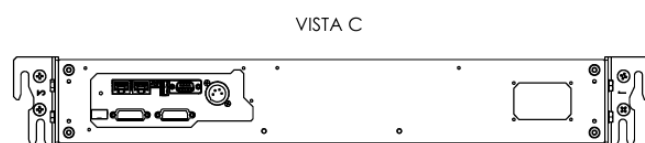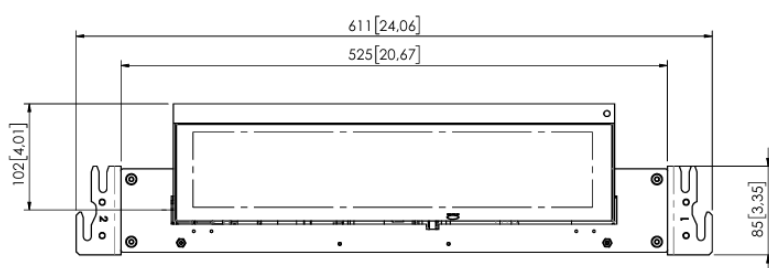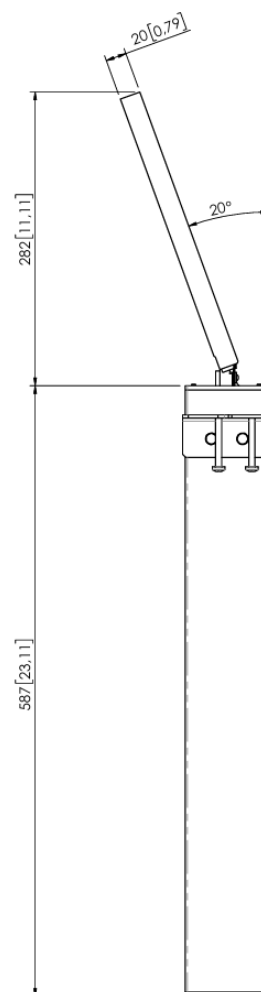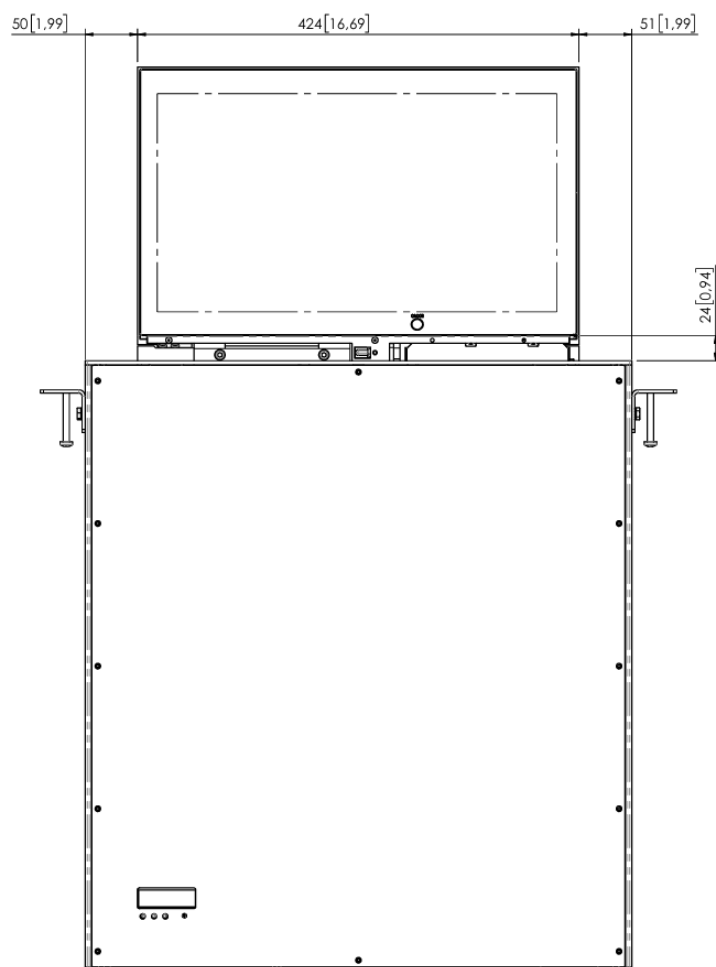

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 · 08512 Sant Hipòlit de Voltregà · Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Make Your Meetings Count!