


## Dynamic 1H

Aluminium motorised monitor with adjustable position and screen always visible



### FEATURES

- 17.3" motorised monitor
- Adjustable position
- Position memory
- Interactive Setup Display
- Maintenance free
- HDCP compliant
- Energy saving design
- Safety system
- Serial control & Remote diagnose

### GENERAL

Dynamic1H monitors have been designed for installation into tables or desks. The screen is always visible; it raises and leans flush on the desk, and can be stopped at any position from 0 to 80 degrees of inclination. A smart memory system will make easy setting up and recalling the desired position.

Built entirely of aluminium and finished with a black edged anti-reflection glass, Dynamic1H are extremely elegant, discreet and timeless. The anodised finish provides a soft, silky effect; it is extremely resilient and serves to dissipate heat.

The glass protects the screen, reduces the "mirror" effect, allows for natural transparent colour and also works as a multi-touch surface (optional). This range is available in 12.1", 15.6", 17.3" and 21.5" all providing excellent contrast and unsurpassed viewing angles. Dynamic1H monitors are equipped with a safety system which stops the movements if resistance is detected. These monitors are remotely controllable and diagnosable through the ERT interfaces in an easy and cost effective way.

## TECHNICAL SPECIFICATIONS

**Display**

Size	17.3" TFT Active Matrix, FULL HD
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m <sup>2</sup>
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/80° (u/d) / 80°/80° (l/r)
Viewing area	381.888 (h) x 214.812 (v) mm
LED backlight lifespan	50.000 hrs
Response time	Tr 37 ms, Tf 7 ms
Temperature (operating/storage)	Operating 0°C – +40°C Storage -20°C – +60°C

**Materials**

Frame	Anodised Aluminium
Glass	AR 2-side with an anti-reflective coating on the glass surface. Thickness: 3.0 ± 0.3 mm
Cover plate	Stainless steel, matt or prepared for underneath installation (to be veneered or for table hedge)

**Connectivity**

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol
GPI (SubD9)	Up/Down control

**Control**

RJ45, RS-422 (I/O)
Addressing
Termination switch
GPI
IR Remote control (monitor adjustments): 1 / 5

**Movement's Control**

User interface on monitor	(Up/Down)
Remote	RS-422 I/O/GPI

**Electrical**

Low voltage (external power supply)	100-240Vac, 47/63Hz, 12Vdc
Power consumption	50W

**Mechanical**

Monitor Dimensions:	
Upper cover plate	509 x 389 x 76 mm [20.04"x15.31"x2.99"]
Weight	17.8 kg / 39.24 lbs
Shipping Dimensions:	
Weight	18.8 kg / 41.44 lbs
Shipping Box	559 x 469 x 222 mm

## OPTIONS

- Touch screen
- Built in DynamicTalk
- USB integrated on cover plate
- USB power integrated on cover plate
- Customised cover plate with speaker, voting system
- Customised laser engraved logotype on cover plate
- Anodisation in different colours

## CERTIFICATIONS

- CE

## WARRANTY


- 2 years general warranty

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.


## CONNECTIVITY PANEL

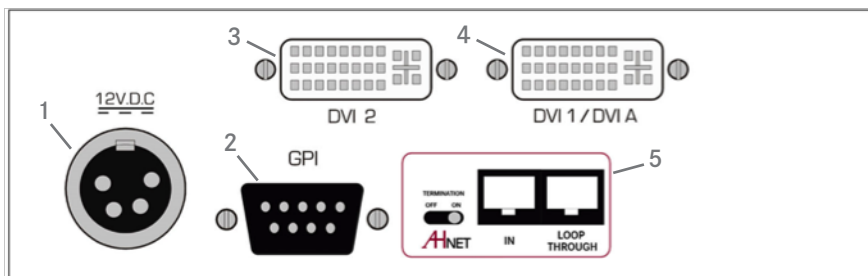

### CONNECTIVITY

- 1- Power input
- 2- GPI control
- 3- DVI-D video input - digital
- 4- DVI-I video input - analog/ digital
- 5- AHnet control interface

## INTERACTIVE SETUP DISPLAY

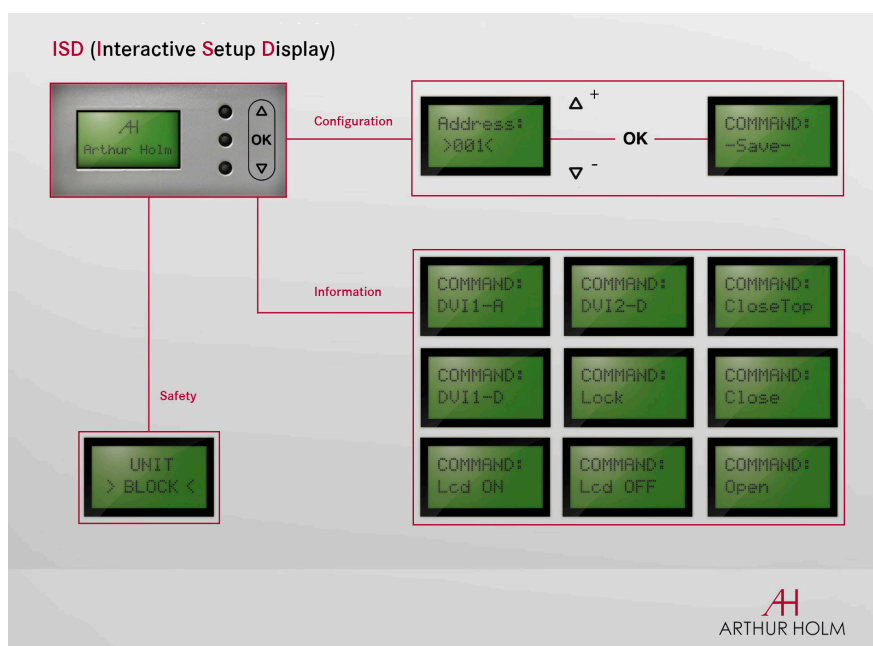

### ISD

- 1- Configuration
- 2- Information
- 3- Safety

## ARCHITECT'S SPECIFICATIONS

Low voltage professional 17.3" widescreen motorised monitor with the screen always visible. Screen housing milled out of solid aluminum in natural anodised finishing. Aluminum cover frame. Front double sided anti-reflective 3 mm black-edged glass.

Motorised folding movement, adjustable tilt angle. Memory for user-defined tilt angle. DVI-I and DVI-D connectors, HDCP compliant inputs. Compatible with AHnet open protocol over RS-422, allowing independent remote control of up to 30 units over a daisy-chain CAT-5 or CAT-6 line. Additional control buttons integrated on the cover plate

that can be activated or deactivated by using AHnet. Easy to read Interactive Set-Up Display (ISD) 1,6"LCD display for address setup and status monitoring. Safety system that detects obstructions, stopping the unit. External power supply with 4-Pin XLR4 connector. Adjustable mechanical parameters through AHnet or ISD for calibration and adjustment of mechanics. Diagnostic readout on ISD for increase service and support.

# GENERAL DIMENSIONS

# AH17D1HGA

