


## DynamicX2Talk

Aluminium retractable motorised monitor with integrated independent universal microphone lift system



This picture corresponds to a customised version of DynamicX2Talk (built-in camera and conference system)

### FEATURES

- Aluminium retractable monitor with an independent microphone lift
- Automatic 20° monitor tilt angle single engine for rise/lower and tilt
- Microphone lift compatible with 3 pin XLR 500 mm gooseneck microphones
- Stainless steel cover plate
- LED lighting ring to indicate microphone status 360°
- PA and Conference working mode
- Serial control and remote diagnosis
- Individual addressing
- Auto Mechanical Movement Calibration System (AH-AMMC)
- Wireless connectivity for setup and control

### GENERAL

Arthur Holm DynamicX2Talk is a motorised retractable product range that includes an independent lift for gooseneck microphones. The retractable monitor provides silent, reliable and harmonic movements by the use of a patented solution with one only engine. This automatic system is equipped with a variable speed system to raise, lower and tilt 20° to ensure the best ergonomics, viewing angle and visibility. The integrated independent lift system for microphones provides a rounded microphone coverlid and it not only makes the microphone disappear within the desk surface, but it also provides a pleasant light to indicate its status. Thanks to its protective and patented lighting ring, the microphones can be safely stored and protected making meeting and conference spaces more flexible and versatile. This system provides two different working modes: PA and Conference. When in PA mode, a push button placed on the stainless steel cover plate allows to activate or de-activate the microphone and the LED ring will indicate the status by changing colour from red to green.

The system will automatically silence the microphone when retracting. When in conference mode, the microphone will be always active and both, the light ring and the access to the push button on the cover plate, will be available via GPI and GPO for remote control. The microphone lift can be adjusted to the exact length of the microphone via AHnet and AHlink. The AHlink is an excellent tool to diagnose, verify and configure DynamicX2 and DynamicTalk. The monitor is equipped with an Interactive Setup Display (ISD) allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speeds, safety settings, brightness, contrast and backlight. The monitors are equipped with an Auto Mechanical Calibration Movement System (AH-AMMC). The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The app AHlink Android and iOS allows getting the unit's serial number without the need to have access to the unit from below the table.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

## TECHNICAL SPECIFICATIONS

## Display

Size	FULL HD 17.3" TFT Active Matrix, widescreen
Resolution	1920 (h) x 1080 (v)
Brightness	400 cd/m2
Contrast ratio	600:1
Pixel	0.1989 (h) x 0.1989 (v) mm
Viewing angle	60°/80° (u/d) / 80°/80° (l/r)
Viewing area	381.888 (h) x 214.812 (v) mm
LED backlight lifespan	50,000 hrs
Response time	Tr 37 ms, Tf 3 ms
Temperature	Operating 0°C – +40°C Storage -20°C – +60°C

## Materials

Frame	Anodised Aluminium
Glass	AR 2 side with anti-reflective coating on the glass surface Thickness: 3.0 ± 0.3mm
Cover plate	Stainless steel, matt or UnderCover installation (to be veneered)

## Others

AHlink	App tool to diagnose, verify and configure
AH-AMMC	Auto Mechanical Calibration Movement System

## Connectivity

Input signal	DVI-I (1 input) – HDCP Compliant DVI-D (1 input) – HDCP Compliant
RJ45 CAT5 (with loop)	Addressable RS422 monitor control by AHnet protocol
GPI (SubD9)	Movements control

## DynamicTalk Control

Up/Down Control	Button on upper cover plate
	GPI contact closer
	RS-422 (RJ45 CAT 5)
Microphone control	Button on upper cover plate
Customised function	Button on upper cover plate
GPI/O	LEDs control and switch

## Electrical

Two ext. power supplies	100-240Vac, 47/63Hz, 12Vdc
Display consumption	50W
DTalk consumption	10W

## Mechanical

Dimensions	640 x 95 x 602 mm [25.2" x3.7" x23.7"]
Weight	21 Kg / 46.2 lbs
Shipping Dimensions:	
Weight	23.7 Kg / 52.2 lbs
Shipping Box	717 x 167 x 707 mm [28.2" x6.5" x27.8"]

## OPTIONS

## MONITOR

- Projected capacitive multi-touch screen
- Monitor housing anodised in black
- Painted cover plate
- DynamicLoop
- DynamicShare
- Built-in camera
- Integrated connectors on cover plate
- Retractable HDMI cable
- UnderCover installation (prepared to be veneered)
- Laser engraved logotype on cover plate

## DYNAMIC TALK

- 5 pin XLR connector
- Customisation with third party conference systems
- UnderCover installation (prepared to be veneered)

## WARRANTY

- 5 years limited warranty
- 2 years general warranty


ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com


Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

*Technology serving Design*  
*Danish craftsmanship, Mediterranean soul*

## CONNECTIVITY PANEL

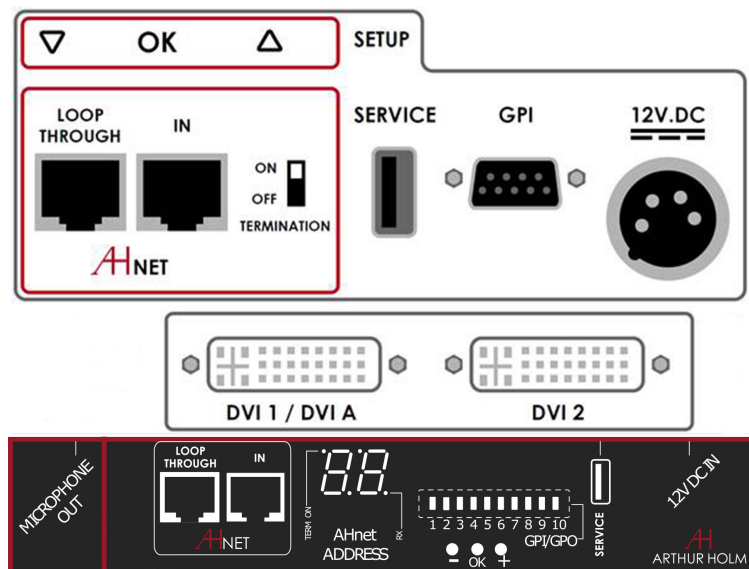

## INTERACTIVE SETUP DISPLAY

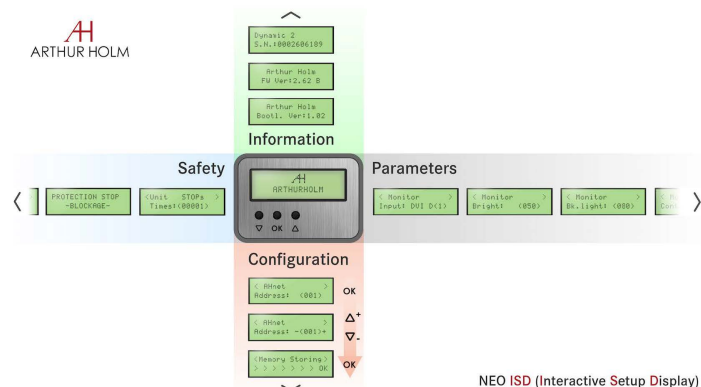

## CONSULTANT ARCHITECT AND ENGINEER SPECIFICATIONS

Vertically retractable motorised 17.3" Full HD professional monitor including a universal microphone lift system. The monitor housing shall be made of milled anodised aluminium and the screen shall be protected with anti-reflective 2 side coating black edged 3 mm glass. The monitor shall make the rise/lower and tilt movements with one only engine. The monitor cover plate shall provide a passive opening system and shall be made of 3 mm brushed stainless steel. The monitor shall have a brightness of 400 cd/m<sup>2</sup>, a contrast ratio of 600:1 and a backlight lifespan of 50,000 hours. The monitor shall provide 2 DVI HDCP inputs by a licensed HDCP monitor manufacturer. The monitor shall provide an addressable RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speeds and the control of the brightness, contrast and backlight.

The monitor shall be able to run an auto-adjustment program to reset the factory setups. The monitor shall provide a USB port for firmware upgrades. The monitor shall be controllable by a wireless Android and iOS app providing information about the monitor's serial number, and providing access to the control and to the setup menu. The system shall include an independent lift system for 3 pin XLR gooseneck microphones in the cover plate. This cover plate shall provide a rounded microphone coverlid and 3 operation buttons; open/close, mute/unmute the microphone and free GPO button.

The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a top position projected through the cover, avoiding the microphone from touching the cover plate, damaging or blocking when retracting. This ring shall provide a programmable green and red LED to indicate the microphone status and shall be visible 360°. The system shall be equipped with RS-422, RJ-45 and AHnet open protocol allowing individual remote control, setup and diagnostic of up to 30 units per line. GPI (contact close to control movements), GPO (contact close to detect button activation) and a USB for firmware updates.


The unit shall provide a safety system that detects obstructions and causes the unit to stop with an audio indication. The unit shall provide and auto calibration mode to reset mechanical speeds and safety adjustments. The system shall provide an automatic RS-422 addressing system when used in combination with ERT-30 and ERT-60. The unit shall be compatible with a wireless app that allows the exact adjustment of the microphone length, facilitates the unit's serial number, allows the activation and de-activation of the RS-422 termination and allows to change the working mode from PA to Conference.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

*Technology serving Design  
Danish craftsmanship, Mediterranean soul*

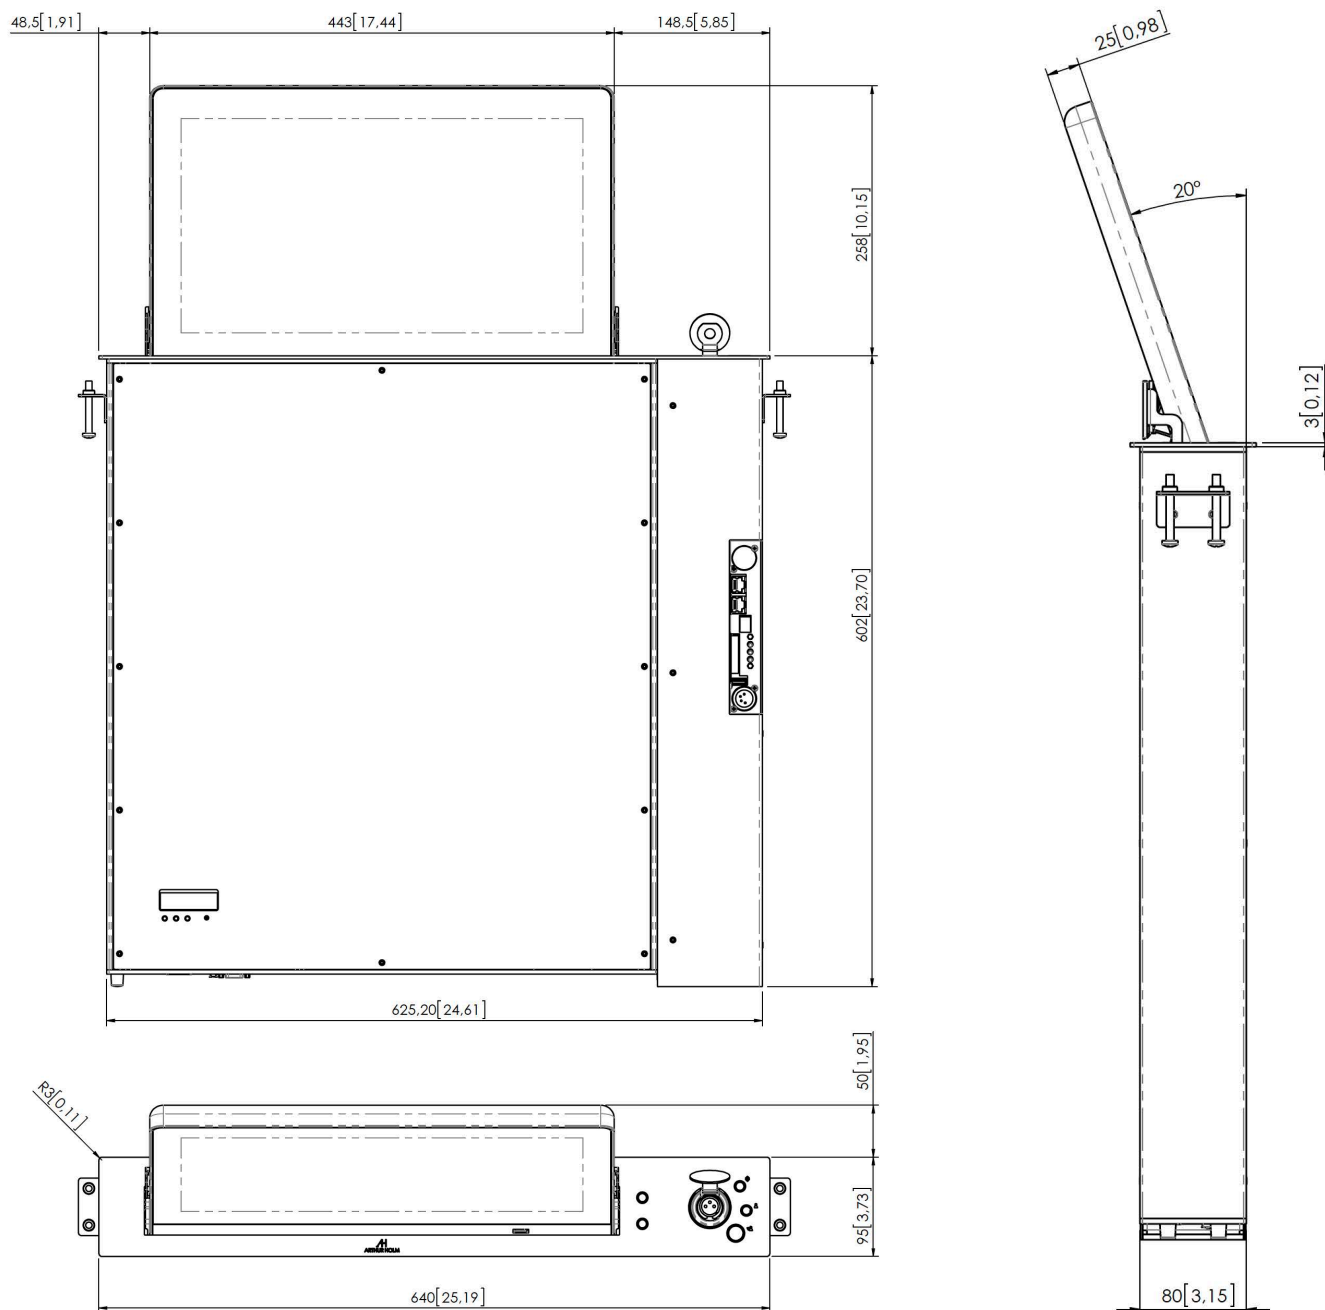

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com  
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

*Technology serving Design*  
*Danish craftsmanship, Mediterranean soul*