
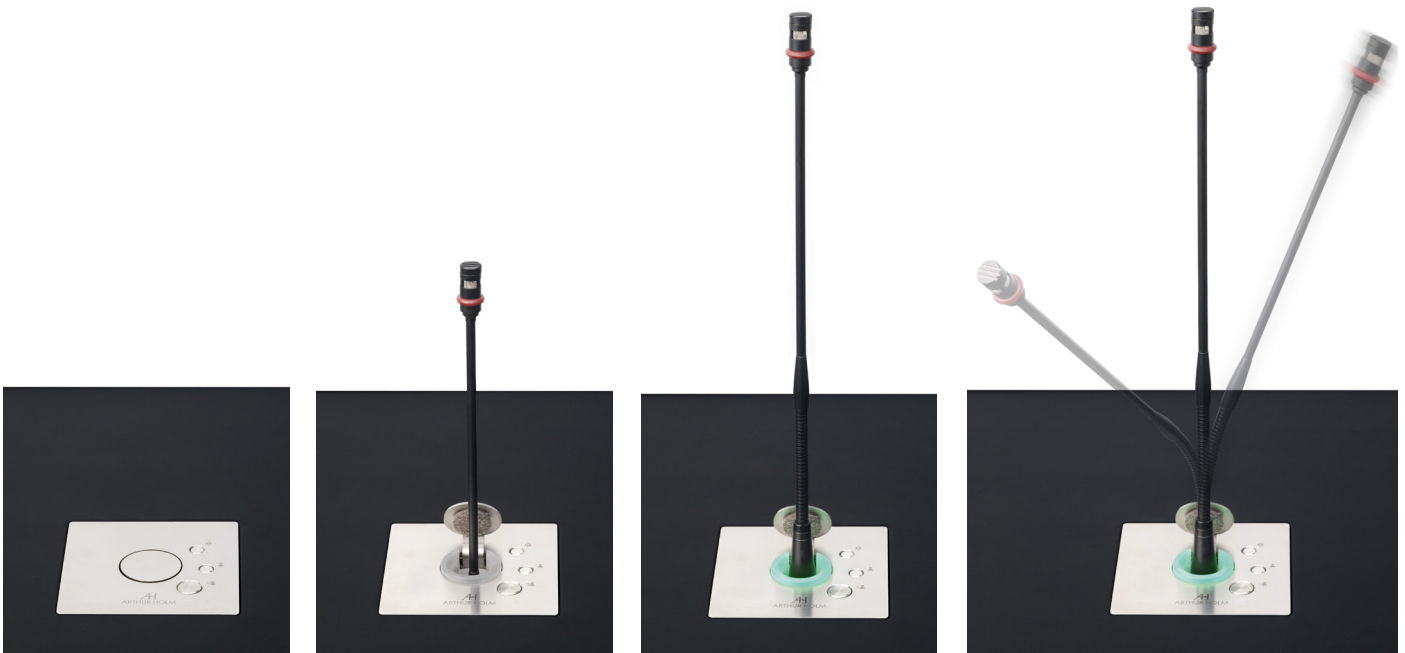


DynamicTalk

Universal motorised lift system for “gooseneck” microphones



FEATURES

- Universal lift system for gooseneck XLR 3 pin microphones
- Stainless steel cover plate with 3 buttons
- LED lighting ring to indicate microphone status, 360°
- Serial control and remote diagnosis
- Individual addressing
- Auto Mechanical Movement Calibration (AH-AMMC)
- PA and Conference working modes

GENERAL

DynamicTalk is an elegant retractable system for gooseneck microphones with exclusive features. It not only makes the microphone disappear within the desk surface but it also provides a pleasant light to indicate its status. Thanks to its protective and patented lighting ring, the microphones can be safely stored and protected making meeting and conference spaces more flexible and versatile.

DynamicTalk provides two different working modes: PA and Conference. When in PA mode, a push button placed on the stainless steel cover plate allows to activate or deactivate the microphone and the LED ring will indicate the status by changing colour from red to green.

The system will automatically silence the microphone when retracting. When in Conference model, the microphone will be always active and both the light ring and the access to the push button on the cover plate will be available via GPI and GPO for remote control.

DynamicTalk is available in 3 sizes: for 400 mm, 500 mm and 600 mm microphones. The exact length of the microphone can be adjusted via AHnet and AHlink. The AHlink is an excellent tool to diagnose, verify and configure DynamicTalk.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

TECHNICAL SPECIFICATIONS

| DynamicTalk Control | |
|-------------------------|-----------------------------------------|
| Up/Down Control | Button on upper cover plate |
| | GPI contact closer |
| | RS422 (RJ45 CAT6) |
| Microphone control | Button on upper cover plate |
| (PA Mode) | GPI contact closer RS422 (RJ45 CAT6) |
| Customized function | Button on upper cover plate |
| GPI/O | LEDs, up/down and switch |
| Electrical | |
| External power supplies | 100-240Vac, 50/60Hz, 12Vdc |
| DynamicTalk consumption | 10W |

| Mechanical | |
|---------------------------|------------------------------------------------|
| Dimensions | 110 x 110 x 604 mm [4.33" x 4.33" x 23.78"] |
| Weight | 3.6 Kg / 7.9 lbs |
| Shipping Dimensions: | |
| Weight | 4.6 Kg / 10.1 lbs |
| Shipping Box | 220 x 215 x 750 mm [8.6" x 8.46" x 29.52"] |
| Maximum microphone length | 500mm [19.6"] |
| Other | |
| AHlink | APP tool to diagnose, verify and configure |
| AH-AMMC | Auto Mechanical Movement Calibration |

CONNECTIVITY PANEL



OPTIONS

- 5 pin XLR connector
- USB power integrated on cover plate
- Laser engraved logo
- Painted in different colours
- Customisation with third party conference systems

WARRANTY

- 2 years general warranty


CONSULTANT, ARCHITECT AND ENGINEERS SPECIFICATIONS

Professional retractable system for 3 pin XLR “gooseneck” microphones. The cover plate shall be made of brushed stainless steel and shall provide a rounded microphone coverlid and 3 operation buttons (open/close, mute/unmute the microphone, free GPO button). The lift system includes a translucent plastic rounded ring to centre the microphone during its rise and retract movement from a position hidden below the cover to a top position projected through the cover, avoiding the microphone from touching the cover plate, damaging or blocking when retracting. This ring shall provide a programmable green and red LED, 360° visible, to indicate the microphone status. The system shall be equipped with RS-422, RJ-45 and AHnet open protocol allowing individual remote control, setup and diagnostic of up to 30 units per line.

GPI (contact close to control movements), GPO (contact close to detect button activation) and a USB for firmware updates. The unit shall provide a safety system that detects obstructions and causes the unit to stop with an audio indication. The unit shall provide and auto calibration mode to reset mechanical speeds and safety adjustments. The system shall provide an automatic RS-422 addressing system when used in combination with ERT-30 and ERT-60.

The unit shall be compatible with a wireless app that allows the system to be adjusted with the exact microphone length, facilitates the unit’s serial number, allows the activation and de-activation of the RS-422 termination and allows to change the working mode from PA to Conference.

GENERAL DIMENSIONS

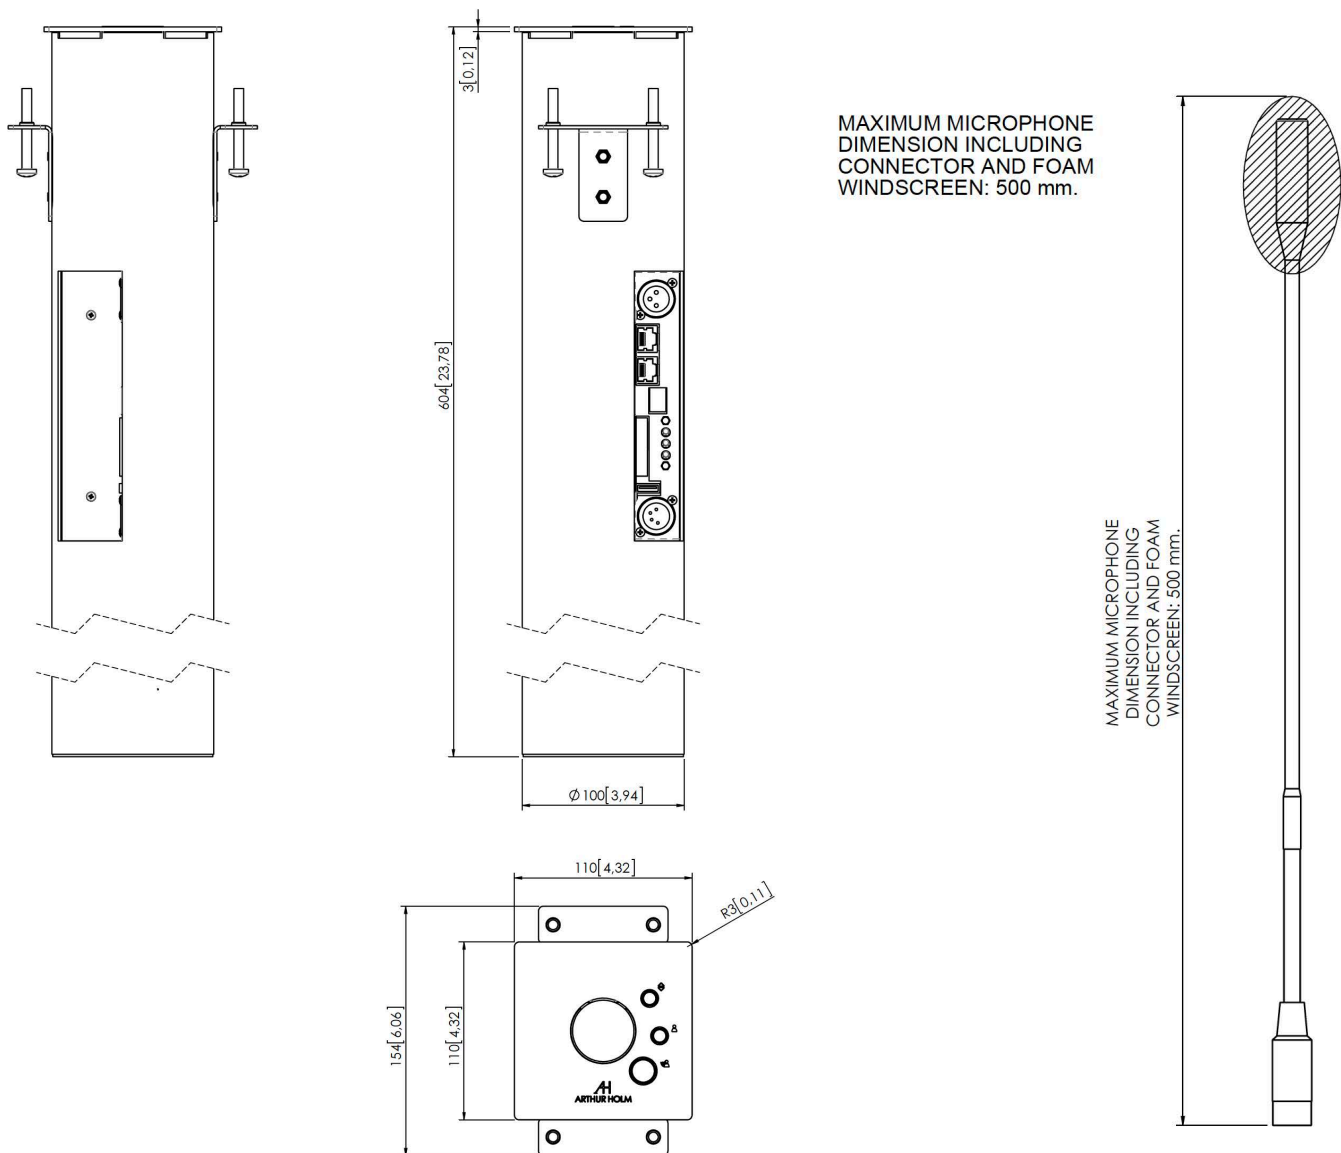

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Bcelona, Spain · +34 938 502 376 · marketing@arthurholm.com
www.arthurholm.com

Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design
Danish craftsmanship, Mediterranean soul