
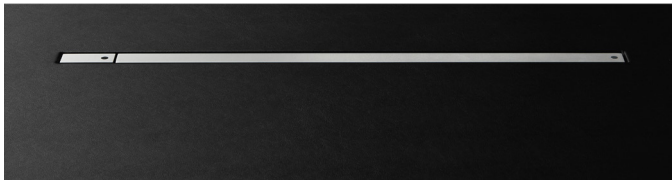


## DB2Share

HDCP compliant retractable motorised monitor with DynamicShare



### FEATURES

- Vertical motorised monitor with up to 20° inclination
- Streamlined retractable HDMI cable
- Adjustable screen angle tilt
- No cover plate required (monitor completely streamlined within the furniture)
- One operation sensor on top of the aluminium housing (to rise and lower the screen and adjust the tilt angle) and share control buttons on the glass
- 20 mm maximum thickness
- Front double sided anti-reflective 2 sides coating 2 mm black edged glass
- Can be veneered
- Interactive Setup Display (ISD)
- Maintenance free
- HDCP compliant
- Energy saving design, low consumption video controller
- Serial control and remote diagnosis
- Wireless connectivity for setup and control
- Individual monitor addressing
- Auto Mechanical Movement Calibration (AH-AMMC)
- Share control buttons located on the screen's glass

### GENERAL

Arthur Holm's DB2Share is a motorised retractable communication solution that creates minimum impact on the furniture's design. It is easy to integrate, intuitive to use (one operation sensor located on the top of the monitor and one touch button on the glass) and almost invisible (no cover plate, neatly streamlined into the furniture) when not in operation. This solution provides full control to view and share documents and videos with a motorised retractable HDMI cable that raises as an extension of the slick design of the monitor and the share control buttons are located on the screen's glass. With a maximum thickness of 20 mm, this monitor range is elegant, beautiful from all angles and can be veneered for a seamless integration in the furniture, creating a long lasting user's experience and delivering an exceptional image's quality. We have selected the best possible aluminium finishing specifications in the world, providing the maximum technical and visual performance.

The screen is protected with an anti-reflective 2 side coating 2 mm black edged glass. By touching directly on the monitor, users can select the HDMI input and share it. DB2Share are available in 17.3" and 21.5". Monitors are equipped with 2 HDMI-HDCP compliant inputs and 1 output, allowing the daisy chain of a maximum of 20 devices. An Interactive Setup Display (ISD) allowing the control, setup and diagnose of the monitors. Monitors provide RS-422 I/O allowing the remote control of movements, speed, safety settings, brightness, contrast and backlight. The monitors are equipped with Auto Mechanical Movement Calibration System (AH-AMMC). The use of the Arthur Holm's ERT will enable the address configuration of all the monitors installed in a table by simply pressing a button. The AHlink Android and iOS app allows getting the monitor's serial number without removing the unit from the table and allows access to the setup and control menu.

#### ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

**Display**

|                                 |   |
|---------------------------------|---|
| Size                            | FULL HD 21.5" TFT Active Matrix, widescreen format. LED backlight |
| Resolution                      | 1920 (h) x 1080 (v)   |
| Brightness                      | 350 cd/m2   |
| Contrast ratio                  | 1000:1  |
| Pixel                           | 0.1989 (h) x 0.1989 (v) mm  |
| Viewing angle                   | 60°/80°(u/d) 80°/80°(l/r)   |
| Viewing area                    | 381.888 (h) x 214.812 (v) mm                                      |
| LED backlight lifespan          | 50,000 hrs  |
| Response time                   | Tr 37ms, Tf 3 ms  |
| Temperature (operating/storage) | Operating 0°C ~+40°C<br>Storage -20°C ~+60°C                      |

**Materials**

|                 |   |
|-----------------|---|
| Monitor housing | Solid mechanised aluminium housing with anodised finish. Front black serigraphed glass. |
|-----------------|---|

**Connectivity**

|                       |  |
|-----------------------|--|
| Input signal          | HDMI retractable cable input<br>HDMI input below the monitor<br>HDMI loop IN/OUT |
| RJ45 CAT6 (with loop) | Addressable RS422 monitor control by AHnet protocol                              |
| GPI (SubD9)           | Up/Down control  |
| USB                   | For service  |

**Control**

|  |  |
|--|--|
| RJ45, RS-422 (I/O), AHNet protocol           |  |
| Addressing                                   |  |
| Termination switch                           |  |
| GPI  |  |
| IR Remote control (monitor adjustments): 1/5 |  |

**Movement's Control**

|                           |                                   |
|---------------------------|-----------------------------------|
| User interface on monitor | (Up/Down) Capacitive touch sensor |
| Remote                    | RS-422 I/O, GPI                   |

**Electrical**

|                       |                             |
|-----------------------|-----------------------------|
| External power supply | 100-240 Vac, 47/63Hz, 12Vdc |
| Power consumption     | 50W                         |

**Accessories**

|     |                         |
|-----|-------------------------|
| ERT | Ethernet Interface Unit |
|-----|-------------------------|

**Mechanical**

|                         |  |
|-------------------------|--|
| Monitor Dimensions:     |  |
| Screen                  | 518 x 310 x 20 mm<br>[20.39" x 12.23" x 0.79"] |
| Top frame               | 518 x 20 mm [20.39" x 0.79"]                   |
| Housing below the table | 621 x 607 x 80 mm<br>[24.45" x 23.9" x 3.15"]  |
| Weight                  | 27 Kg/59,5 Lb                                  |
| Shipping Dimensions:    |  |
| Weight                  | 28 Kg / 61.7 Lbs                               |
| Shipping Box            | 810 x 165 x 705 mm<br>[31.8" x 6.5" x 27.8"]   |

**OPTIONS**


- Projected capacitive multi-touch screen
- Black anodised
- Gold finish
- Bronze finish
- Painted
- Aluminium cover plate

**CERTIFICATIONS**


- CE
- FCC
- IECEE

**WARRANTY**

- 5 years limited warranty
- 2 years general warranty

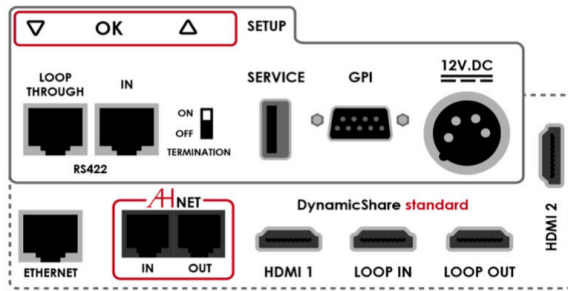

INTERACTIVE SETUP DISPLAY (ISD)

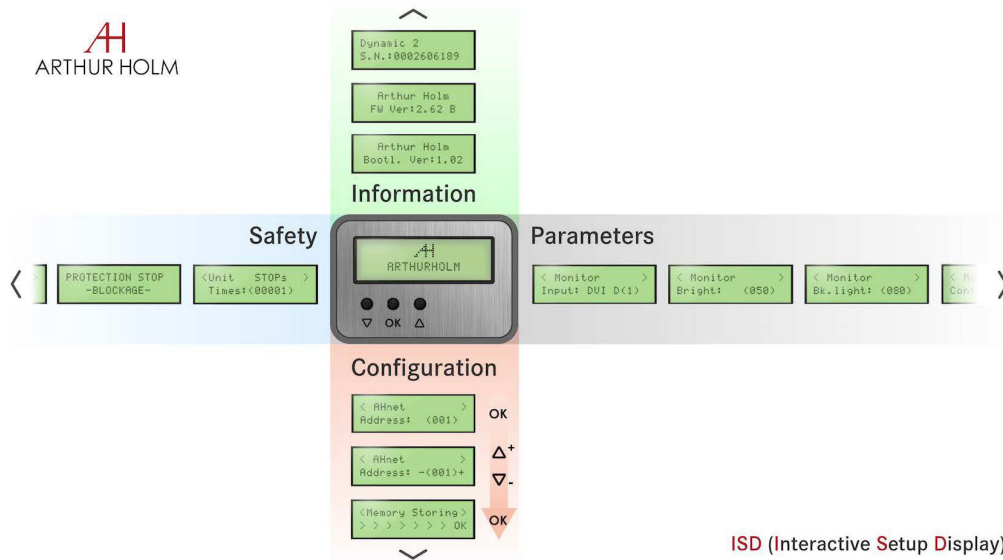

ISD (Interactive Setup Display)

CONSULTANTS, ARCHITECTS AND ENGINEERS SPECIFICATIONS


Vertically retractable motorised 21.5" Full HD professional monitor. The monitor housing shall be made of milled anodised aluminium with a maximum thickness of 20 mm and the screen shall be protected with an anti-reflective 2 side coating black edged 2 mm glass. The monitor shall allow its installation in a furniture opening with a maximum width of 20 mm and shall be designed to be veneered to match the furniture's surface. The monitor housing shall be flush with the table when the monitor is in recessed position and a motorised retractable HDMI cable shall raise as an extension of the monitor. A capacitive button that shall be placed at the top of the monitor shall activate the monitor's movements. The monitor shall provide full control to view and share HDMI signals by pushing the touch buttons integrated on the glass of the screen, below the viewing area.

The monitor shall have a brightness of 350 cd/m2, a contrast ratio of 1000:1 and a backlight lifespan of 50,000 hours. The monitor shall provide 2 HDMI HDCP inputs by a licensed HDCP monitor manufacturer and one HDMI output. The monitor shall provide an addressable RS-422 and an easy to read Interactive Setup Display (ISD) to access the safety parameters, the setup of the speed and the control of the brightness, contrast and backlight. The monitor shall be able to run an auto-adjustment program to reset the factory setups. The monitor shall provide a USB port for firmware upgrades. The monitor shall be controlled by a wireless Android and iOS app providing information about the monitor's serial number, and providing access to the control and to the set-up menu.

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design

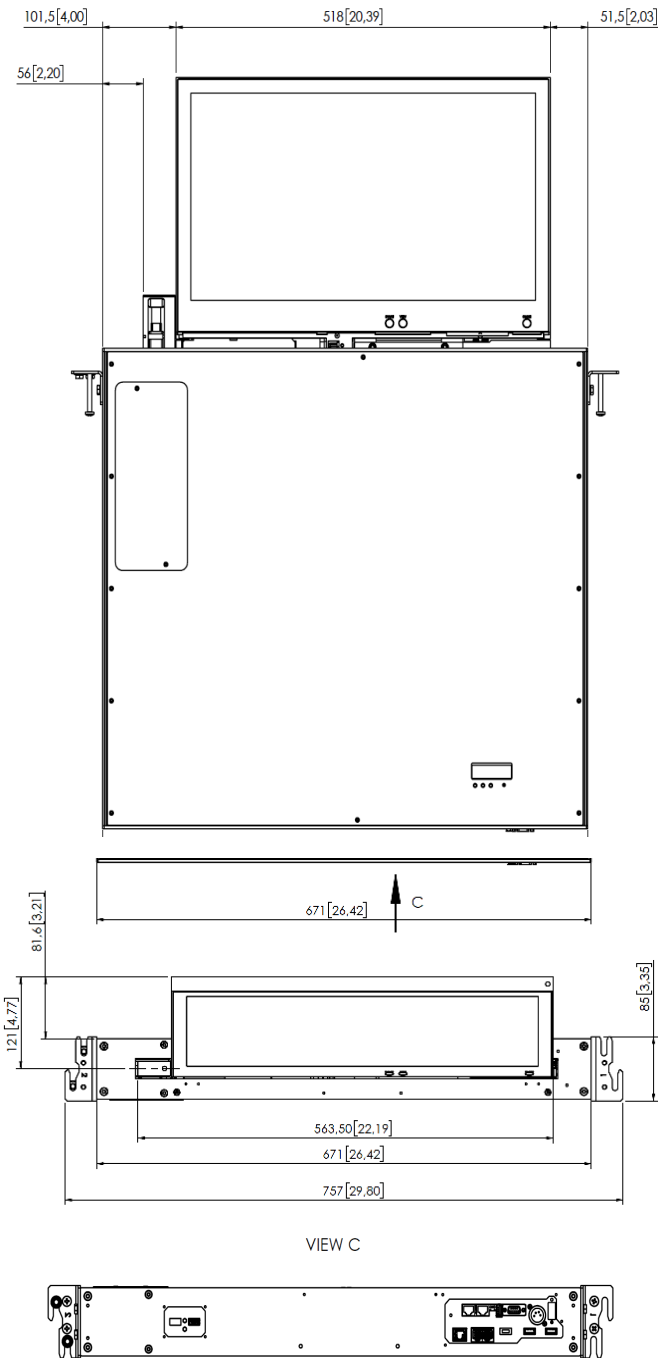

ARTHUR HOLM

Albiral Display Solutions SL · Fàtima, 25 Sant Hipòlit de Voltregà 08512 Barcelona, Spain · +34 938 502 376 · marketing@arthurholm.com · www.arthurholm.com  
 Arthur Holm is a registered brand of Albiral Display Solutions SL. Specifications subject to change without previous notice.

Technology serving Design